





CUTTING TOOLS

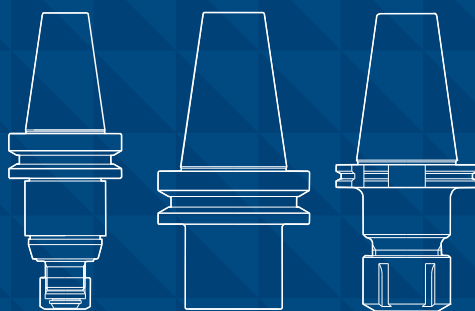



TOOLING SYSTEM

YG YG-1 CO., LTD.

HYDRAULIC CHUCK

Description	TOOL LENGTH PRE-SETTING TYPE	POWER E HYDRO	STANDARD
Page	SK : D12 CBT : D64 BT : D94 HSK : D154	SK : D13 CBT : D65 BT : D95 HSK : D155	SK : D14 / CBT : D66 - 67 BT : D96 - 97 HSK : D156 - 159 DIN 228-MTB : D238
			
ULTRA SHORT	SLIM	GRINDER	LONG & SLIM
SK : D15 BT : D98	SK : D16 CBT : D68 BT : D99 HSK : D160	SK : D17	HSK : D161
			

SHRINK FIT HOLDER

Description	EXTRA SLIM	STANDARD	COOLANT CHANNEL
Page	SK : D18 BT : D100 - 101 HSK : D162 - 163	SK : D19 - 21 / CBT : D69 - 71 BT : D102 - 104 HSK : D164 - 167, D172 ISO : D228	SK : D22 - 24 CBT : D72 - 74 BT : D105 - 107 HSK : D168 - 170
			
REINFORCED	CURVED	MQL1	EXTENSION
SK : D25 BT : D108 HSK : D171	SK : D26 BT : D109 HSK : D173 - 174	HSK : D175 - 176	STRAIGHT-ST : D214 - 215
			

Guide Line to Icons

Standard of Tools		Taper Accuracy	G Value		RPM		Run-Out	Coolant System	
DIN 69871-SK	DIN 69893-HSK		2.5G 6.3G	15,000 RPM	20,000 RPM	 (in 3D) ≤3μm	 AD or AD/B	 AD/B	
JIS B6339-BT	CBT			25,000 RPM	30,000 RPM		 AD	 AD+C or AD/B+C	
Collet	Bolt	Spanner	Tap Adaptor	ER Nut	ER Spanner	Parts			
									

※ Product design and technical data in the contents are subject to change for improving quality or performance of products without prior notice.

ER COLLET CHUCK


Description	STANDARD	SLIM
Page	SK : D27 - 32 / CBT : D75 - 76 BT : D110 - 114 / HSK : D177 - 181 STRAIGHT : D216 / DIN 228-MTA : D234 DIN 228-MTB : D239 / GOST : D241	SK : D33 - 34 / CBT : D77 BT : D115 - 116 / HSK : D182 - 185 STRAIGHT : D217 - 218 ISO : D229
		

TENSION ER CHUCK (For Tapping)	For CNC Lathe
STRAIGHT : D219	NC : D220
	

END MILL HOLDER & SIDE LOCK ARBOR

Description	SHORT	COOLANT CHANNEL
Page	SK : D35 BT : D117	SK : D37, D40 BT : D119, D122 HSK : D187, D189
		
	STANDARD	SIDE LOCK ARBOR
	SK : D36, D38, D39 CBT : D78 / BT : D118, D120, D121 HSK : D186, D188 GOST : D242	CBT : D79 BT : D123 - 124
		

SHELL MILL ARBOR

Description	STANDARD	COOLANT CHANNEL & SMALL FACE	COOLANT CHANNEL & LARGE FACE
Page	SK : D41 CBT : D80 / BT : D125 HSK : D190 GOST : D243	SK : D42 CBT : D81 BT : D126 HSK : D191	SK : D43 CBT : D82 BT : D127 HSK : D192
			
	FLANGE MOUNTING		COMBI-SHELL MILL ARBOR
	SK : D44 BT : D128 HSK : D193		SK : D45 / CBT : D83 BT : D129 / HSK : D194 ISO : D231
			

POWER MILLING CHUCK

Description	HIGH-SPEED	STANDARD
Page	SK : D46 CBT : D84 BT : D130 HSK : D195	SK : D47 / CBT : D85 BT : D131 / HSK : D196 DIN 228-MTA : D235 DIN 228-MTB : D240
		

MORSE TAPER ARBOR

Description	MORSE TAPER ARBOR
Page	SK : D48 BT : D132 - 133 HSK : D197 / NT : D232 GOST : D244
	

SK SLIM CHUCK

Description	SK SLIM CHUCK
Page	SK : D49 - 52 / CBT : D86 - 87 BT : D134 - 137 / HSK : D198 - 200 STRAIGHT-K : D221 ISO : D230
	

SYNCHRO
TAPPING CHUCK

Description	ER COLLET TYPE	QUICK CHANGE (ADAPTOR) TYPE
Page	SK : D53 BT : D138 HSK : D201 STRAIGHT-KW : D222	SK : D54 HSK : D202 STRAIGHT-KW : D223
		



FACE MILL
ARBOR

Description	FMA	FMB	FMC
Page	CBT : D89 / BT : D142 HSK : D206 NT : D233 DIN 228-MTA : D237	CBT : D90 BT : D143	CBT : D91 BT : D144 HSK : D207
			

ONE STEP
TAPPING CHUCK

Description	ONE STEP TAPPING CHUCK
Page	SK : D55 BT : D139 HSK : D203 STRAIGHT-KW : D224
	

COPY MILL ARBOR &
INDEXABLE DRILL HOLDER

Description	COPY MILL ARBOR	INDEXABLE DRILL HOLDER
Page	SK : D58 BT : D145 HSK : D208	SK : D59 BT : D146 HSK : D209
		

TAPPING
CHUCK

Description	ER COLLET TYPE	TAP ADAPTOR TYPE
Page	SK : D56 CBT : D88 BT : D140 HSK : D204	SK : D57 / BT : D141 HSK : D205 STRAIGHT-K : D225 DIN 228-MTA : D236
		

NC DRILL
CHUCK

Description	KEYLESS TYPE	HEX. KEY TYPE
Page	SK : D60 / CBT : D92 BT : D147 HSK : D210 STRAIGHT-K : D226	SK : D61 BT : D148 HSK : D211
		






OTHER
TOOLS

Description	SIDE CUTTER ARBOR	JACOBS TAPER ARBOR
Page	BT : D149	BT : D150
		
	BLANK BAR	TEST BAR
	SK : D62 BT : D151 HSK : D212	SK : D62 BT : D152 HSK : D212
		


TOOL
HOLDER
SET

Description	HYDRAULIC CHUCK	POWER MILLING CHUCK	POWER MILLING CHUCK - Quick Change
Page	D246	D247	D248
			

BORING
SYSTEM

ING TEM	Description	BASIC HOLDER	FINE BORING HEAD & INSERT HOLDER	ROUGH BORING HEAD & CARTRIDGE
	Page	SK : D252 BT : D253 - 254 HSK : D255	D256	D257
				
EXTENSION BAR		REDUCTION BAR	TYPICAL CONFIGURATION OF FINE BORING BAR	TYPICAL CONFIGURATION OF ROUGH BORING BAR
D258		D259	SK : D260 - 261 BT : D262 - 263 HSK : D264 - 265	SK : D266 BT : D267 - 268 HSK : D269 - 270 STRAIGHT-ST : D271
				
BASIC HOLDER (Big Bore)		FINE BORING HEAD (Big Bore)	PLATE & CARTRIDGE (Big Bore)	FINE BORING BAR (Big Bore)
SK : D273 BT : D273		D274	D275	BT : D276
				
		ROUGH BORING BAR (Big Bore)	MICRO BORING BAR	SQUARE BORING BAR
		SK : D277 BT : D278	BT : D279 - 280 STRAIGHT-ST : D281 BIG SIZE : D282 PARTS : D283 - 285	45° : D286 90° : D287 SQUARE BITE : D288
				

ACCESSORY
& PARTS

Description	HYD. CHUCK - Test Piece	HYD. CHUCK - Reduction Sleeve	SHRINK FIT - Heating Machine
Page	D290	HK : D291 HS : D292 HF : D293 HR : D294	D295
			
ER COLLET CHUCK - Collet & Nut	END MILL HOLDER - Side Lock Bolt	SHELL MILL ARBOR - Bolt & Key	FACE MILL ARBOR - Bolt & Key
COLLET : D296 - 304 NUT : D305 - 308 SPANNER : D309	D310	SMA : D311 CMA : D312	D313
			
POWER MILLING CHUCK - Collet & Spanner	SK SLIM CHUCK - Collet & Nut	TAPPING CHUCK - Tap Adaptor	PULL STUD BOLT
D314	COLLET : D315 - 316 NUT & SPANNER : D317	D318 - 319	D320 - 321
			
TOOL CLAMP	HEIGHT PRESETTER	COOLANT TUBE & SPANNER (HSK)	ADJUST BOLT (HSK MQL1)
D322	D322	D323	D324
			

YG-1 TOOLING SYSTEM

SK
(DIN 69871)



- HYDRAULIC CHUCK
- SHRINK FIT HOLDER
- ER COLLET CHUCK
- END MILL HOLDER
- SHELL MILL ARBOR
- COMBI-SHELL MILL ARBOR
- POWER MILLING CHUCK
- MORSE TAPER ARBOR
- SK SLIM CHUCK
- SYNCHRO TAPPING CHUCK
- ONE STEP TAPPING CHUCK
- TAPPING ER CHUCK
- TAPPING CHUCK
- COPY MILL ARBOR
- INDEXABLE DRILL HOLDER
- NC DRILL CHUCK
- BLANK BAR
- TEST BAR

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HCR

HYDRAULIC CHUCK (RADIAL TOOL LENGTH PRE-SETTING TYPE)

HYDRAULIK SPANNFUTTER (RADIALE WERKZEUGLÄGEN VOREINSTELLUNG)
MANDRIN HYDRAULIQUE (BANC DE PRÉ-RÉGLAGE RADIAL)
MANDRINI IDRAULICI (UTENSILI RADIALI PER AZZERAMENTO)
PORTAHERRAMIENTAS HIDRAULICO (AJUSTE DE LONGITUD TIPO PRE-SETTING)

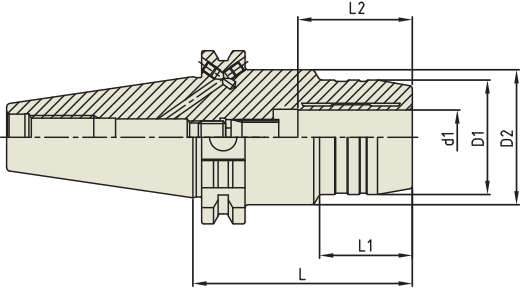

DIN
69871-
SK

AT3

2.5G

25,000
RPM

(at 3D)
≤ 3μm

AD or AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT(Kg)
30	SK30-HCR12-85	P2770001A	12	32	44.5	85	40	37	0.90
	SK30-HCR20-85	P2770003A	20	44	-	85	-	42	1.00
40	SK40AD/B-HCR12-80.5	P2554018	12	32	49.5	80.5	31.5	37	1.50
	SK40AD/B-HCR20-80.5	P2554019	20	42	49.5	80.5	34	42	1.60
	SK40AD/B-HCR32-110	P2770004	32	63	80	110	50	55	2.20
50	SK50AD/B-HCR12-80.5	P2770005	12	32	49.5	80.5	35	37	3.90
	SK50AD/B-HCR20-80.5	P2770006	20	42	44.5	80.5	44	42	4.00
	SK50AD/B-HCR32-100	P2770002	32	60	-	100	-	55	4.70

► CAT(ASME B5.50) taper and Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





HYDRAULIC
CHUCK

HCP

HYDRAULIC CHUCK (Power E Hydro)

HYDRAULIK SPANNFUTTER (POWER E HYDRO)
MANDRIN HYDRAULIQUE (POWER E HYDRO)
MANDRINI IDRAULICI (POWER E HYDRO)
PORTAHERRAMIENTAS HIDRAULICO (POWER E HYDRO)

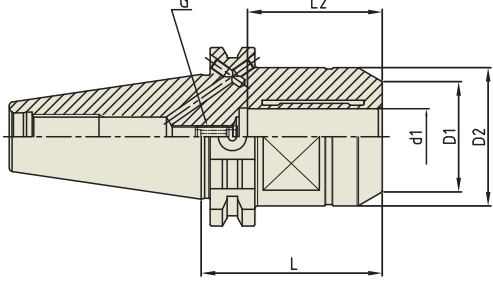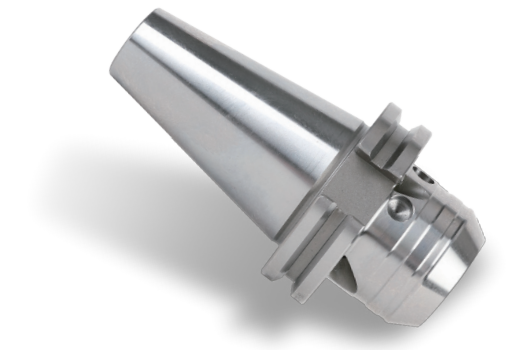

DIN
69871-
SK

AT3

2.5G

25,000
RPM

(at 3D)
≤ 3μm

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	WEIGHT (Kg)
40	SK40AD/B-HC12P-50	P2776651P	12	32	42	50	41	M8x1.0	1.00
	SK40AD/B-HC20P-64.5	P2534001P	20	39.3	49.3	64.5	48	M8x1.0	1.20
50	SK50AD/B-HC20P-64.5	P2756010P	20	39.3	49.3	64.5	48	M8x1.0	2.80
	SK50AD/B-HC32P-81	P2534002P	32	58.5	72	81	57	M8x1.0	3.90

► CAT(ASME B5.50) taper and Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HC

HYDRAULIC CHUCK (STANDARD)

HYDRAULIK SPANNFUTTER (STANDARD)
MANDRIN HYDRAULIQUE (STANDARD)
MANDRINI IDRAULICI (STANDARD)
PORTAHERRAMIENTAS HIDRAULICO (ESTÁNDAR)



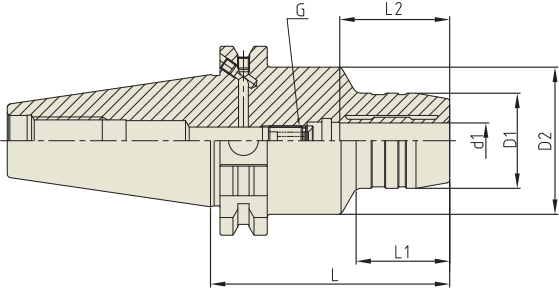

DIN
69871-
SK

AT3

2.5G

25,000
RPM

(at 3D)
≤ 3μm

AD or AD/B

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
30	SK30-HC6-70	P2770101A	6	26	45	70	20	27	M5x0.8	0.65
	SK30-HC8-70	P2770110A	8	28	45	70	20	27	M6x1.0	0.65
	SK30-HC10-75	P2770102A	10	30	45	75	21	32	M8x1.0	0.73
	SK30-HC12-85	P2770111A	12	32	45	85	40	37	M10x1.0	0.80
	SK30-HC14-85	P2770112A	14	34	45	85	22	37	M10x1.0	0.80
	SK30-HC16-90	P2770113A	16	38	45	90	50	42	M6x1.0	0.90
	SK30-HC18-90	P2770114A	18	40	45	90	50	42	M10x1.0	0.90
	SK30-HC20-90	P2770115A	20	42	45	90	50	42	M6x1.0	0.90
40	SK40AD/B-HC6-80.5	P2554017	6	26	49.5	80.5	30	27	M5x0.8	1.31
	SK40AD/B-HC6-110	P2554016	6	26	49.5	110	29.5	27	M5x0.8	1.76
	SK40AD/B-HC8-80.5	P2554025	8	28	49.5	80.5	30	27	M6x1.0	1.34
	SK40AD/B-HC8-110	P2770117	8	28	49.5	110	30	27	M6x1.0	1.76
	SK40AD/B-HC10-80.5	P2554004	10	30	49.5	80.5	31	32	M8x1.0	1.34
	SK40AD/B-HC10-110	P2554009	10	30	49.5	110	31	32	M8x1.0	1.76
	SK40AD/B-HC12-80.5	P2554011	12	32	49.5	80.5	31.5	37	M10x1.0	1.34
	SK40AD/B-HC12-110	P2554010	12	32	49.5	110	31.5	37	M10x1.0	1.76
	SK40AD/B-HC14-80.5	P2776653	14	34	49.5	80.5	32	37	M10x1.0	1.35
	SK40AD/B-HC14-110	P2776654	14	34	49.5	110	32	37	M10x1.0	1.75
	SK40AD/B-HC16-80.5	P2554013	16	38	49.5	80.5	33	42	M12x1.0	1.34
	SK40AD/B-HC16-110	P2554012	16	38	49.5	110	33	42	M12x1.0	1.76
	SK40AD/B-HC20-80.5	P2554015	20	42	49.5	80.5	34	42	M16x1.0	1.35
	SK40AD/B-HC20-110	P2554014	20	42	49.5	110	34	42	M16x1.0	1.78
	SK40AD/B-HC25-80.5	P2770103	25	55	66	80.5	22	48	M16x1.0	1.75
	SK40AD/B-HC32-110	P2770126	32	63	80	110	25.5	55	M16x1.0	2.60
50	SK50AD/B-HC6-80.5	P2770104	6	26	49.5	80.5	30	27	M5x0.8	3.00
	SK50AD/B-HC8-80.5	P2770116	8	28	49.5	80.5	30	27	M6x1.0	3.00
	SK50AD/B-HC10-80.5	P2770106	10	30	49.5	80.5	32	32	M8x1.0	3.00
	SK50AD/B-HC12-80.5	P2770118	12	32	49.5	80.5	35	37	M10x1.0	3.05
	SK50AD/B-HC14-80.5	P2776655	14	34	49.5	80.5	37	37	M10x1.0	3.07
	SK50AD/B-HC16-80.5	P2770108	16	38	49.5	80.5	40	42	M12x1.0	3.10
	SK50AD/B-HC20-80.5	P2770119	20	42	49.5	80.5	40	42	M16x1.0	3.15

► CAT(ASME B5.50) taper and Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► Supplied with clamping T-wrench.
► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D14

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





HYDRAULIC
CHUCK

HC

HYDRAULIC CHUCK (ULTRA SHORT)

HYDRAULIK SPANNFUTTER (KURZ)
MANDRIN HYDRAULIQUE (COURT)
MANDRINI IDRAULICI (CORTO)
PORTAHERRAMIENTAS HIDRAULICO (CORTO)

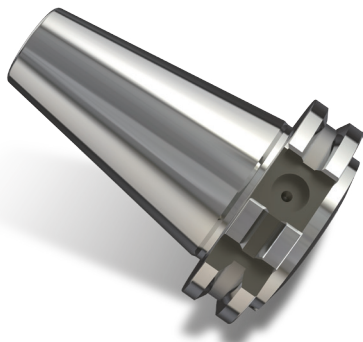

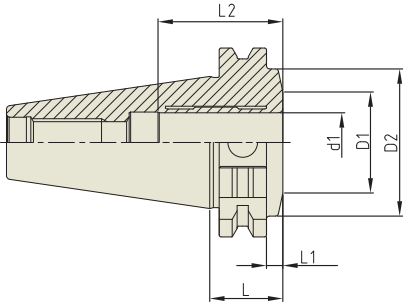

DIN
69871-
SK

AT3

2.5G

25,000
RPM

(at 3D)
≤ 3μm

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
40	SK40-HC20-24.6	P2770120	20	34	49.5	24.6	5.5	42	0.81
50	SK50-HC32-30.9	P2770121	32	49	70.5	30.9	11.85	55	2.63

► CAT(ASME B5.50) taper and Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► Supplied with clamping T-wrench.
► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D15


phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

**SFHS**

SHRINK FIT HOLDER (EXTRA SLIM)

SCHRUMPFUTTER
MANDRIN DE FRETTAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

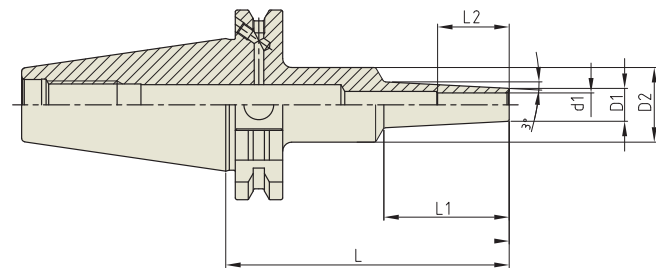


									Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
30	SK30-SFHS3-60	P2771332S	3	6	20	60	22	9	-
	SK30-SFHS3-80	P2771333S	3	6	25	80	42	9	-
	SK30-SFHS4-60	P2771334S	4	7	20	60	22	12	-
	SK30-SFHS4-80	P2771335S	4	7	25	80	42	12	-
	SK30-SFHS6-60	P2771336S	6	9	20	60	22	18	-
	SK30-SFHS6-80	P2771337S	6	9	25	80	42	18	-
40	SK40AD/B-SFHS3-95	P2771338S	3	6	25	95	42	9	0.89
	SK40AD/B-SFHS3-120	P2771339S	3	6	25	120	67	9	0.91
	SK40AD/B-SFHS4-95	P2771340S	4	7	25	95	42	12	0.90
	SK40AD/B-SFHS4-120	P2771341S	4	7	25	120	67	12	0.92
	SK40AD/B-SFHS6-95	P2771342S	6	9	25	95	42	18	0.90
	SK40AD/B-SFHS6-120	P2771343S	6	9	25	120	67	18	0.93
	SK40AD/B-SFHS8-95	P2771344S	8	11	25	95	42	24	0.90
	SK40AD/B-SFHS8-120	P2771345S	8	11	32	120	67	24	1.01
	SK40AD/B-SFHS10-95	P2771346S	10	13	25	95	42	30	0.91
	SK40AD/B-SFHS10-120	P2771347S	10	13	32	120	67	30	1.02
	SK40AD/B-SFHS12-95	P2771348S	12	15	32	95	42	30	0.99
	SK40AD/B-SFHS12-120	P2771349S	12	15	32	120	67	30	1.02
50	SK50AD/B-SFHS3-110	P2771350S	3	6	25	110	42	9	2.77
	SK50AD/B-SFHS3-160	P2771351S	3	6	25	160	97	9	2.79
	SK50AD/B-SFHS4-110	P2771352S	4	7	25	110	42	12	2.75
	SK50AD/B-SFHS4-160	P2771353S	4	7	25	160	97	12	2.80
	SK50AD/B-SFHS6-110	P2771354S	6	9	26	110	42	18	2.74
	SK50AD/B-SFHS6-160	P2771355S	6	9	26	160	97	18	2.85
	SK50AD/B-SFHS8-110	P2771356S	8	11	36	110	42	24	2.84
	SK50AD/B-SFHS8-160	P2771357S	8	11	36	160	97	24	2.92
	SK50AD/B-SFHS10-110	P2771358S	10	13	36	110	42	30	2.85
	SK50AD/B-SFHS10-160	P2771359S	10	13	36	160	97	30	2.93
	SK50AD/B-SFHS12-110	P2771360S	12	15	36	110	42	30	2.85
	SK50AD/B-SFHS12-160	P2771361S	12	15	36	160	97	30	2.96

- ▶ CAT(ASME B5.50) taper and Inch type products are available.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

**SFH**

SHRINK FIT HOLDER

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

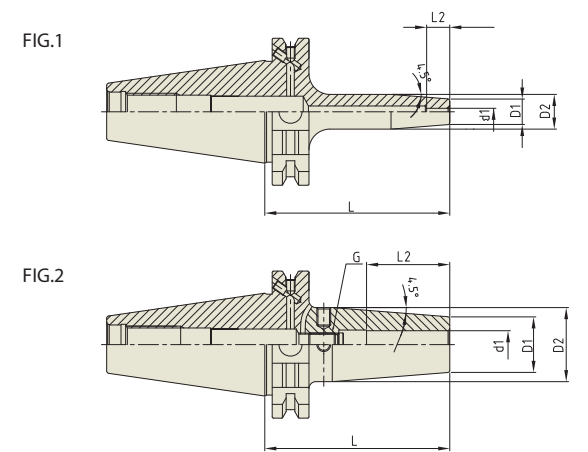

										Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
30	SK30-SFH3-60	P2771308A	3	11	15	60	10	-	1	0.40
	SK30-SFH4-60	P2771309A	4	11	15	60	12	-	1	0.40
	SK30-SFH5-60	P2771310A	5	11	15	60	15	-	1	0.40
	SK30-SFH6-60	P2771311A	6	21	27	60	36	M5×0.8	2	0.40
	SK30-SFH8-60	P2771312A	8	21	27	60	36	M6×1.0	2	0.40
	SK30-SFH10-80	P2771313A	10	24	32	80	42	M8×1.0	2	0.40
	SK30-SFH12-80	P2771314A	12	24	32	80	47	M10×1.0	2	0.42
	SK30-SFH14-80	P2771315A	14	27	34	80	47	M10×1.0	2	-
	SK30-SFH16-80	P2771316A	16	27	34	80	50	M12×1.0	2	0.42
	SK30-SFH18-80	P2771319A	18	33	42	80	50	M12×1.0	2	-
	SK30-SFH20-90	P2771318A	20	33	42	90	52	M16×1.0	2	0.44
40	SK40AD/B-SFH3-80	P2771301	3	11	15	80	10	-	1	1.00
	SK40AD/B-SFH4-80	P2771302	4	11	15	80	12	-	1	1.00
	SK40AD/B-SFH5-80	P2771303	5	11	15	80	15	-	1	1.00
	SK40AD/B-SFH6-80	P2554058	6	21	27	80	36	M5×0.8	2	1.10
	SK40AD/B-SFH6-130	P2771320A	6	21	27	130	36	M5×0.8	2	-
	SK40AD/B-SFH6-160	P2771304	6	21	27	160	36	M5×0.8	2	1.15
	SK40AD/B-SFH8-80	P2600009	8	21	27	80	36	M6×1.0	2	1.11
	SK40AD/B-SFH8-130	P2771321A	8	21	27	130	36	M6×1.0	2	-
	SK40AD/B-SFH8-160	P2771305	8	21	27	160	36	M6×1.0	2	1.15
	SK40AD/B-SFH10-80	P2554052	10	24	32	80	42	M8×1.0	2	1.10
	SK40AD/B-SFH10-130	P2771322A	10	24	32	130	42	M8×1.0	2	-
	SK40AD/B-SFH10-160	P2771306	10	24	32	160	42	M8×1.0	2	1.15
	SK40AD/B-SFH12-80	P2600008	12	24	32	80	47	M10×1.0	2	1.10
	SK40AD/B-SFH12-130	P2771323A	12	24	32	130	47	M10×1.0	2	-
	SK40AD/B-SFH12-160	P2771307	12	24	32	160	47	M10×1.0	2	1.15
	SK40AD/B-SFH14-80	P2771319	14	27	34	80	47	M10×1.0	2	1.20
	SK40AD/B-SFH14-130	P2771324A	14	27	34	130	47	M10×1.0	2	-
	SK40AD/B-SFH14-160	P2771320	14	27	34	160	47	M10×1.0	2	1.50

- ▶ CAT(ASME B5.50) taper and Inch type products are available.
- ▶ Supplied without balancing screws.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.



▶ NEXT PAGE

SFH

SFH

SHRINK FIT HOLDER

SCHRUMPFUTTER
MANDRIN DE FRETTAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

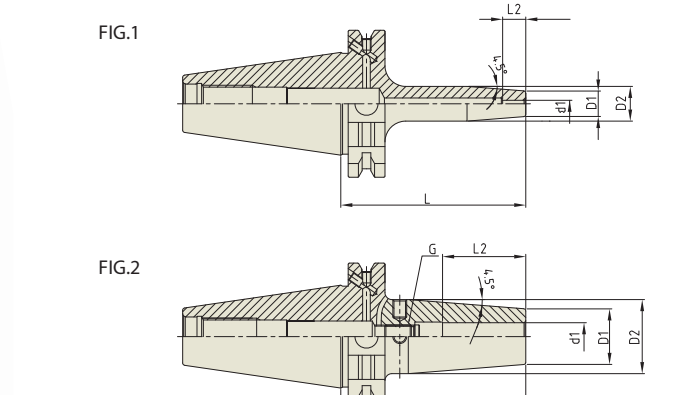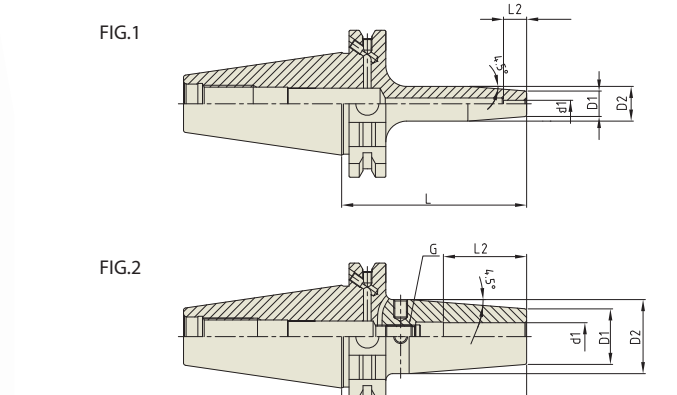

										Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
50	SK50AD/B-SFH12-160	P2762015	12	24	32	160	47	M10×1.0	2	2.00
	SK50AD/B-SFH12-200	P2771336A	12	24	32	200	47	M10×1.0	2	-
	SK50AD/B-SFH14-80	P2763010	14	27	34	80	47	M10×1.0	2	1.60
	SK50AD/B-SFH14-130	P2771337A	14	27	34	130	47	M10×1.0	2	-
	SK50AD/B-SFH14-160	P2763015	14	27	34	160	47	M10×1.0	2	2.10
	SK50AD/B-SFH14-200	P2771338A	14	27	34	200	47	M10×1.0	2	-
	SK50AD/B-SFH16-80	P2764010	16	27	34	80	50	M12×1.0	2	1.60
	SK50AD/B-SFH16-130	P2771339A	16	27	34	130	50	M12×1.0	2	-
	SK50AD/B-SFH16-160	P2764015	16	27	34	160	50	M12×1.0	2	2.10
	SK50AD/B-SFH16-200	P2771340A	16	27	34	200	50	M12×1.0	2	-
	SK50AD/B-SFH18-80	P2765010	18	33	42	80	50	M12×1.0	2	1.60
	SK50AD/B-SFH18-130	P2771341A	18	33	42	130	50	M12×1.0	2	-
	SK50AD/B-SFH18-160	P2765015	18	33	42	160	50	M12×1.0	2	2.00
	SK50AD/B-SFH18-200	P2771342A	18	33	42	200	50	M12×1.0	2	-
	SK50AD/B-SFH20-80	P2766010	20	33	42	80	52	M16×1.0	2	1.80
	SK50AD/B-SFH20-130	P2771343A	20	33	42	130	52	M16×1.0	2	-
	SK50AD/B-SFH20-160	P2766015	20	33	42	160	52	M16×1.0	2	2.20
	SK50AD/B-SFH20-200	P2771344A	20	33	42	200	52	M16×1.0	2	-
	SK50AD/B-SFH25-90	P2771330	25	44	53	90	58	M16×1.0	2	2.00
	SK50AD/B-SFH25-130	P2771345A	25	44	53	130	58	M16×1.0	2	-
SK50AD/B-SFH25-160	P2771331	25	44	53	160	58	M16×1.0	2	2.40	
SK50AD/B-SFH25-200	P2771346A	25	44	53	200	58	M16×1.0	2	-	

- ▶ CAT(ASME B5.50) taper and Inch type products are available.
- ▶ Supplied without balancing screws.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHRINK FIT
HOLDER

SFH

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

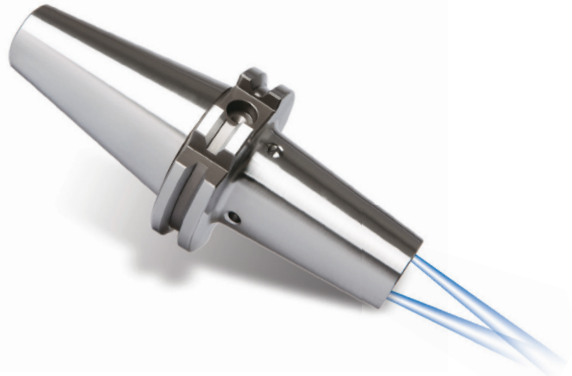

DIN
69871-
SK



2.5G







FIG.1


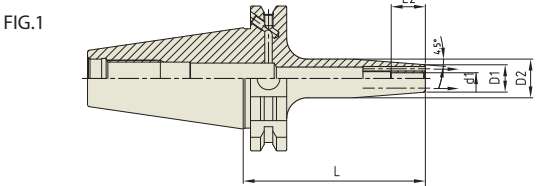


FIG.2

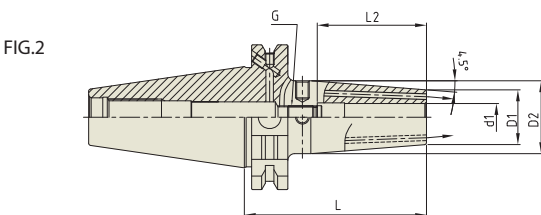

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
40	SK40AD/B-SFH3C-80*1	P2801337C	3	12	17	80	10	-	1	-
	SK40AD/B-SFH4C-80*1	P2771302C	4	12	17	80	12	-	1	-
	SK40AD/B-SFH5C-80*1	P2801340C	5	12	17	80	15	-	1	-
	SK40AD/B-SFH6C-80	P2801301C	6	21	27	80	36	M5x0.8	2	1.10
	SK40AD/B-SFH6C-130	P2801342C	6	21	27	130	36	M5x0.8	2	-
	SK40AD/B-SFH6C-160	P2801302C	6	21	27	160	36	M5x0.8	2	1.15
	SK40AD/B-SFH8C-80	P2801303C	8	21	27	80	36	M6x1.0	2	1.11
	SK40AD/B-SFH8C-130	P2801343C	8	21	27	130	36	M6x1.0	2	-
	SK40AD/B-SFH8C-160	P2801304C	8	21	27	160	36	M6x1.0	2	1.15
	SK40AD/B-SFH10C-80	P2801305C	10	24	32	80	42	M8x1.0	2	1.10
	SK40AD/B-SFH10C-130	P2801344C	10	24	32	130	42	M8x1.0	2	-
	SK40AD/B-SFH10C-160	P2801306C	10	24	32	160	42	M8x1.0	2	1.15
	SK40AD/B-SFH12C-80	P2801307C	12	24	32	80	47	M10x1.0	2	1.10
	SK40AD/B-SFH12C-130	P2801345C	12	24	32	130	47	M10x1.0	2	-
	SK40AD/B-SFH12C-160	P2801308C	12	24	32	160	47	M10x1.0	2	1.15
	SK40AD/B-SFH14C-80	P2801309C	14	27	34	80	47	M10x1.0	2	1.20
	SK40AD/B-SFH14C-130	P2801346C	14	27	34	130	47	M10x1.0	2	-
	SK40AD/B-SFH14C-160	P2801310C	14	27	34	160	47	M10x1.0	2	1.50
	SK40AD/B-SFH16C-80	P2801311C	16	27	34	80	50	M12x1.0	2	1.20
	SK40AD/B-SFH16C-130	P2801347C	16	27	34	130	50	M12x1.0	2	-
	SK40AD/B-SFH16C-160	P2801312C	16	27	34	160	50	M12x1.0	2	1.50
	SK40AD/B-SFH18C-80	P2801313C	18	33	42	80	50	M12x1.0	2	1.30
	SK40AD/B-SFH18C-130	P2801348C	18	33	42	130	50	M12x1.0	2	-
	SK40AD/B-SFH18C-160	P2801314C	18	33	42	160	50	M12x1.0	2	1.60
	SK40AD/B-SFH20C-80	P2801315C	20	33	42	80	52	M16x1.0	2	1.40
	SK40AD/B-SFH20C-130	P2801349C	20	33	42	130	52	M16x1.0	2	-
	SK40AD/B-SFH20C-160	P2801316C	20	33	42	160	52	M16x1.0	2	1.70
	SK40AD/B-SFH25C-90	P2801317C	25	44	53	90	58	M16x1.0	2	1.70
	SK40AD/B-SFH25C-130	P2801350C	25	44	53	130	58	M16x1.0	2	-
	SK40AD/B-SFH25C-160	P2801318C	25	44	53	160	58	M16x1.0	2	2.00

▶ CAT(ASME B5.50) taper and Inch type products are available.


▶ Supplied without balancing screws.

▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

▶ With two coolant channel bores.

▶ Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)

▶ *1 Resealable type is not available.



▶ NEXT PAGE

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHRINK FIT
HOLDER

SFH

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

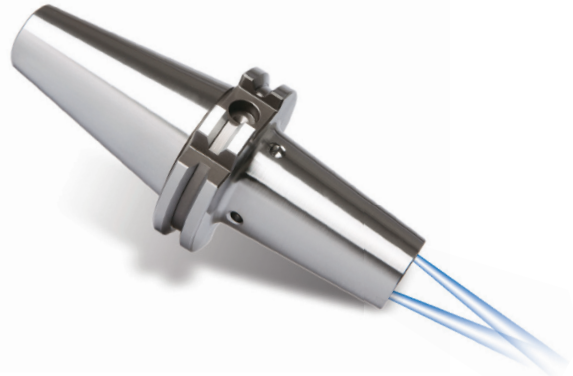

DIN
69871-
SK



2.5G







FIG.1


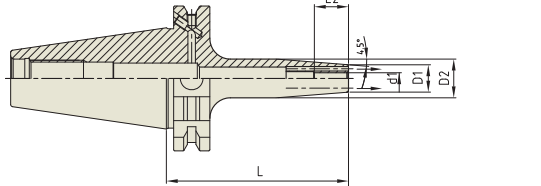


FIG.2

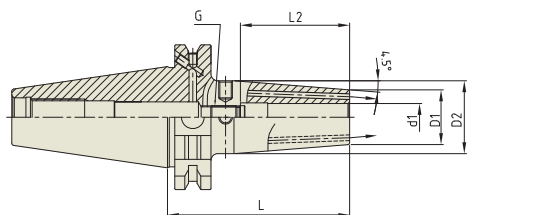

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
50	SK50AD/B-SFH3C-80*1	P2801338C	3	12	17	80	10	-	1	-
	SK50AD/B-SFH4C-80*1	P2801339C	4	12	17	80	12	-	1	-
	SK50AD/B-SFH5C-80*1	P2801341C	5	12	17	80	15	-	1	-
	SK50AD/B-SFH6C-80	P2801319C	6	21	27	80	36	M5x0.8	2	1.50
	SK50AD/B-SFH6C-130	P2801351C	6	21	27	130	36	M5x0.8	2	-
	SK50AD/B-SFH6C-160	P2801320C	6	21	27	160	36	M5x0.8	2	2.00
	SK50AD/B-SFH6C-200	P2801352C	6	21	27	200	36	M5x0.8	2	-
	SK50AD/B-SFH8C-80	P2801321C	8	21	27	80	36	M6x1.0	2	1.50
	SK50AD/B-SFH8C-130	P2801353C	8	21	27	130	36	M6x1.0	2	-
	SK50AD/B-SFH8C-160	P2801322C	8	21	27	160	36	M6x1.0	2	2.00
	SK50AD/B-SFH8C-200	P2801354C	8	21	27	200	36	M6x1.0	2	-
	SK50AD/B-SFH10C-80	P2801323C	10	24	32	80	42	M8x1.0	2	1.50
	SK50AD/B-SFH10C-130	P2801355C	10	24	32	130	42	M8x1.0	2	-
	SK50AD/B-SFH10C-160	P2801324C	10	24	32	160	42	M8x1.0	2	2.00
	SK50AD/B-SFH10C-200	P2801356C	10	24	32	200	42	M8x1.0	2	-
	SK50AD/B-SFH12C-80	P2801325C	12	24	32	80	47	M10x1.0	2	1.60
	SK50AD/B-SFH12C-130	P2801357C	12	24	32	130	47	M10x1.0	2	-
	SK50AD/B-SFH12C-160	P2801326C	12	24	32	160	47	M10x1.0	2	2.10
	SK50AD/B-SFH12C-200	P2801358C	12	24	32	200	47	M10x1.0	2	-
	SK50AD/B-SFH14C-80	P2801327C	14	27	34	80	47	M10x1.0	2	1.60
	SK50AD/B-SFH14C-130	P2801359C	14	27	34	130	47	M10x1.0	2	-
	SK50AD/B-SFH14C-160	P2801328C	14	27	34	160	47	M10x1.0	2	2.10
	SK50AD/B-SFH14C-200	P2801360C	14	27	34	200	47	M10x1.0	2	-
	SK50AD/B-SFH16C-80	P2801329C	16	27	34	80	50	M12x1.0	2	1.60
	SK50AD/B-SFH16C-130	P2801361C	16	27	34	130	50	M12x1.0	2	-
	SK50AD/B-SFH16C-160	P2801330C	16	27	34	160	50	M12x1.0	2	2.10
	SK50AD/B-SFH16C-200	P2801362C	16	27	34	200	50	M12x1.0	2	-

▶ CAT(ASME B5.50) taper and Inch type products are available.


▶ Supplied without balancing screws.

▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

▶ With two coolant channel bores.

▶ Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)

▶ *1 Resealable type is not available.



▶ NEXT PAGE

D22

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

D23

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




SHRINK FIT HOLDER

SFH

SHRINK FIT HOLDER (CURVED)

SCHRUMPFUTTER (GEBOGEN)
MANDRIN DE FRETAGE (INCURVÉ)
MADRINI PER CALLETAMENTO A CALDO (CURVO)
PORTAHERRAMIENTAS DE COMPRESION POR CALOR (CURVADO)

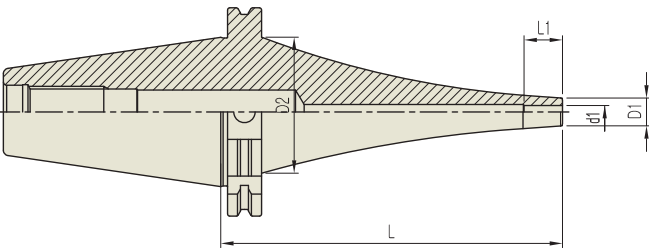

DIN 69871-SK

AT3

2.5G

25,000 RPM

ILDI ≤ 3µm

AD/B

Unit : mm								
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	WEIGHT (Kg)
50	SK50AD/B-SFH8CV-195	P2785067CV	8	16	70	195	24	-
	SK50AD/B-SFH10CV-165	P2785068CV	10	19	70	165	30	-
	SK50AD/B-SFH10CV-195	P2785069CV	10	19	70	195	30	-
	SK50AD/B-SFH12CV-165	P2785070CV	12	22	70	165	30	-
	SK50AD/B-SFH12CV-195	P2785071CV	12	22	70	195	30	-

► CAT(ASME B5.50) taper and Inch type products are available.

► Supplied without balancing screws.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D26

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




ER COLLET CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER



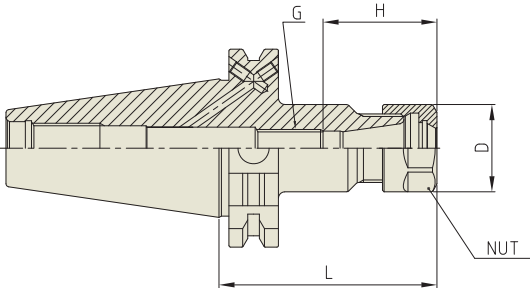

DIN 69871-SK

AT3

2.5G

25,000 RPM

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
40	SK40AD/B-ER11-70	P2774812	0.5 - 7.0	70	19	M6	45	ER11	0.90
	SK40AD/B-ER11-100	P2774826	0.5 - 7.0	100	19	M6	45	ER11	0.95
	SK40AD/B-ER16-70	P2774801	0.5 - 10.0	70	28	M10	36	ER16	0.44
	SK40AD/B-ER16-100	P2774804	0.5 - 10.0	100	28	M10	36	ER16	0.56
	SK40AD/B-ER16-130	P2774827	0.5 - 10.0	130	28	M10	36	ER16	0.69
	SK40AD/B-ER16-160	P2774828	0.5 - 10.0	160	28	M10	36	ER16	0.81
	SK40AD/B-ER20-70	P2774813	0.5 - 13.0	70	34	M12	44.5	ER20	0.47
	SK40AD/B-ER20-100	P2774820	0.5 - 13.0	100	34	M12	44.5	ER20	0.64
	SK40AD/B-ER20-130	P2774829	0.5 - 13.0	130	34	M12	44.5	ER20	0.80
	SK40AD/B-ER20-160	P2774830	0.5 - 13.0	160	34	M12	44.5	ER20	1.00
	SK40AD/B-ER25-70	P2774802	1.0 - 16.0	70	42	M12	52	ER25	0.56
	SK40AD/B-ER25-100	P2774805	1.0 - 16.0	100	42	M12	52	ER25	0.84
	SK40AD/B-ER25-130	P2774831	1.0 - 16.0	130	42	M12	52	ER25	1.14
	SK40AD/B-ER25-160	P2774832	1.0 - 16.0	160	42	M12	52	ER25	1.44
	SK40AD/B-ER32-70	P2774803	1.0 - 20.0	70	50	M12	60	ER32	0.51
	SK40AD/B-ER32-100	P2774806	1.0 - 20.0	100	50	M12	60	ER32	0.88
	SK40AD/B-ER32-130	P2774833	1.0 - 20.0	130	50	M12	60	ER32	1.21
	SK40AD/B-ER32-160	P2774834	1.0 - 20.0	160	50	M12	60	ER32	1.54
	SK40AD/B-ER40-80	P2774814	2.0 - 30.0	80	63	M12	53	ER40	0.65
	SK40AD/B-ER40-100	P2774835	2.0 - 30.0	100	63	M12	75	ER40	0.90
SK40AD/B-ER40-130	P2774836	2.0 - 30.0	130	63	M12	75	ER40	1.34	
SK40AD/B-ER40-160	P2774837	2.0 - 30.0	160	63	M12	75	ER40	1.77	

► CAT(ASME B5.50) taper and Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

► NEXT PAGE

D27

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST


TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

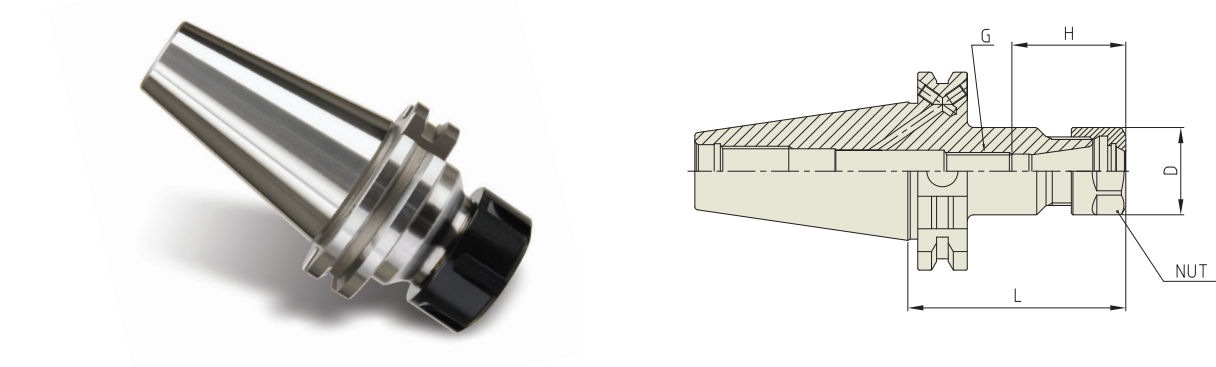

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50	SK50AD/B-ER16-70	P2774815	0.5 - 10.0	70	28	M10	36	ER16	2.71
	SK50AD/B-ER16-100	P2774821	0.5 - 10.0	100	28	M10	45	ER16	2.82
	SK50AD/B-ER16-130	P2774838	0.5 - 10.0	130	28	M10	36	ER16	2.92
	SK50AD/B-ER16-160	P2774839	0.5 - 10.0	160	28	M10	36	ER16	3.01
	SK50AD/B-ER20-70	P2774816	0.5 - 13.0	70	34	M12	44.5	ER20	2.78
	SK50AD/B-ER20-100	P2774822	0.5 - 13.0	100	34	M12	50	ER20	2.88
	SK50AD/B-ER20-130	P2774840	0.5 - 13.0	130	34	M12	50	ER20	3.02
	SK50AD/B-ER20-160	P2774841	0.5 - 13.0	160	34	M12	50	ER20	3.16
	SK50AD/B-ER25-70	P2774817	1.0 - 16.0	70	42	M12	65	ER25	2.75
	SK50AD/B-ER25-100	P2774823	1.0 - 16.0	100	42	M12	52	ER25	3.06
	SK50AD/B-ER25-130	P2774842	1.0 - 16.0	130	42	M12	42	ER25	3.32
	SK50AD/B-ER25-160	P2774843	1.0 - 16.0	160	42	M12	42	ER25	3.57
	SK50AD/B-ER32-70	P2774818	1.0 - 20.0	70	50	M12	60	ER32	2.84
	SK50AD/B-ER32-100	P2774824	1.0 - 20.0	100	50	M12	60	ER32	3.29
	SK50AD/B-ER32-130	P2774844	1.0 - 20.0	130	50	M12	73	ER32	3.67
	SK50AD/B-ER32-160	P2774845	1.0 - 20.0	160	50	M12	73	ER32	4.06
	SK50AD/B-ER40-80	P2774819	2.0 - 30.0	80	63	M12	69	ER40	3.10
	SK50AD/B-ER40-100	P2774825	2.0 - 30.0	100	63	M12	75	ER40	3.56
	SK50AD/B-ER40-130	P2774846	2.0 - 30.0	130	63	M12	75	ER40	4.22
	SK50AD/B-ER40-160	P2774847	2.0 - 30.0	160	63	M12	75	ER40	4.88

- ▶ CAT(ASME B5.50) taper and Inch type products are available.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
- ▶ For applicable ER collet, please refer to page D296~D304.
- ▶ For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST


TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

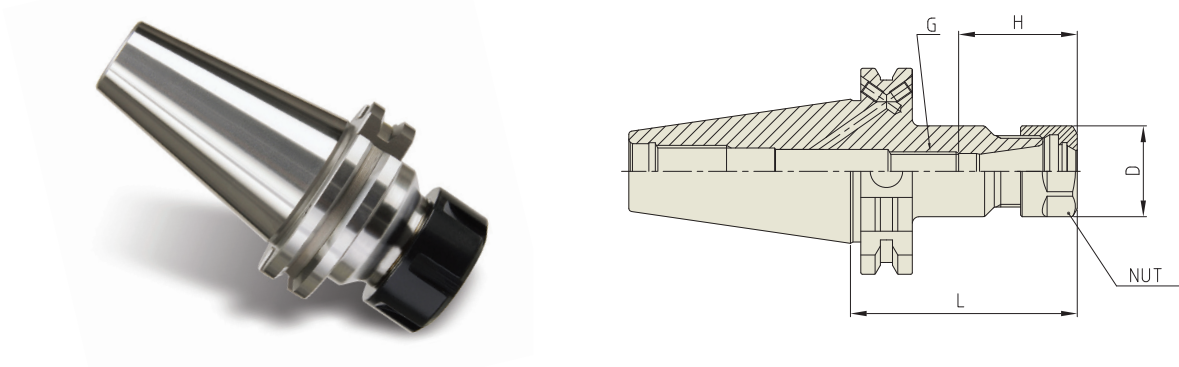

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
40	SK40AD/B-ER11-70	P2537006	0.5 - 7.0	70	19	M6	45	ER11	0.90
	SK40AD/B-ER11-100	P2771802	0.5 - 7.0	100	19	M6	45	ER11	0.95
	SK40AD/B-ER16-70	P2537033	0.5 - 10.0	70	28	M10	36	ER16	0.44
	SK40AD/B-ER16-100	P2537017	0.5 - 10.0	100	28	M10	36	ER16	0.56
	SK40AD/B-ER16-130	P2771803	0.5 - 10.0	130	28	M10	36	ER16	0.69
	SK40AD/B-ER16-160	P2771804	0.5 - 10.0	160	28	M10	36	ER16	0.81
	SK40AD/B-ER20-70	P2537034	0.5 - 13.0	70	34	M12	44.5	ER20	0.47
	SK40AD/B-ER20-100	P2537018	0.5 - 13.0	100	34	M12	44.5	ER20	0.64
	SK40AD/B-ER20-130	P2771805	0.5 - 13.0	130	34	M12	44.5	ER20	0.80
	SK40AD/B-ER20-160	P2771806	0.5 - 13.0	160	34	M12	44.5	ER20	1.00
	SK40AD/B-ER25-70	P2537009	1.0 - 16.0	70	42	M12	52	ER25	0.56
	SK40AD/B-ER25-100	P2537019	1.0 - 16.0	100	42	M12	52	ER25	0.84
	SK40AD/B-ER25-130	P2771807	1.0 - 16.0	130	42	M12	52	ER25	1.14
	SK40AD/B-ER25-160	P2771808	1.0 - 16.0	160	42	M12	52	ER25	1.44
	SK40AD/B-ER32-70	P2537032	1.0 - 20.0	70	50	M12	60	ER32	0.51
	SK40AD/B-ER32-100	P2537020	1.0 - 20.0	100	50	M12	60	ER32	0.88
	SK40AD/B-ER32-130	P2771809	1.0 - 20.0	130	50	M12	60	ER32	1.21
	SK40AD/B-ER32-160	P2771810	1.0 - 20.0	160	50	M12	60	ER32	1.54
	SK40AD/B-ER40-80	P2537011	2.0 - 30.0	80	63	M12	53	ER40	0.65
	SK40AD/B-ER40-100	P2771811	2.0 - 30.0	100	63	M12	75	ER40	0.90
	SK40AD/B-ER40-130	P2771812	2.0 - 30.0	130	63	M12	75	ER40	1.34
	SK40AD/B-ER40-160	P2771813	2.0 - 30.0	160	63	M12	75	ER40	1.77

- ▶ CAT(ASME B5.50) taper and Inch type products are available.
- ▶ For applicable ER collet, please refer to page D296~D304.
- ▶ For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

▶ NEXT PAGE

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER



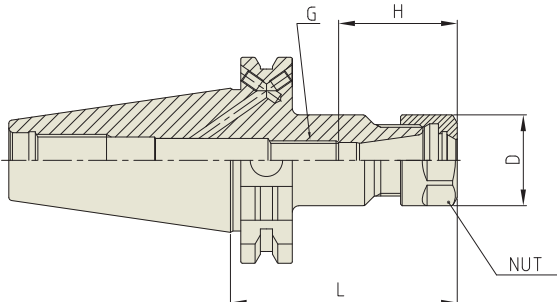

DIN
69871-
SK

AT3

6.3G

15,000
RPM

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50	SK50AD/B-ER16-70	P2537012	0.5 - 10.0	70	28	M10	36	ER16	2.71
	SK50AD/B-ER16-100	P2537021	0.5 - 10.0	100	28	M10	45	ER16	2.82
	SK50AD/B-ER16-130	P2771814	0.5 - 10.0	130	28	M10	36	ER16	2.92
	SK50AD/B-ER16-160	P2771815	0.5 - 10.0	160	28	M10	36	ER16	3.01
	SK50AD/B-ER20-70	P2771801	0.5 - 13.0	70	34	M12	44.5	ER20	2.78
	SK50AD/B-ER20-100	P2537022	0.5 - 13.0	100	34	M12	50	ER20	2.88
	SK50AD/B-ER20-130	P2771816	0.5 - 13.0	130	34	M12	50	ER20	3.02
	SK50AD/B-ER20-160	P2771817	0.5 - 13.0	160	34	M12	50	ER20	3.16
	SK50AD/B-ER25-70	P2600030	1.0 - 16.0	70	42	M12	65	ER25	2.75
	SK50AD/B-ER25-100	P2537023	1.0 - 16.0	100	42	M12	52	ER25	3.06
50	SK50AD/B-ER25-130	P2771818	1.0 - 16.0	130	42	M12	42	ER25	3.32
	SK50AD/B-ER25-160	P2771819	1.0 - 16.0	160	42	M12	42	ER25	3.57
	SK50AD/B-ER32-70	P2537035	1.0 - 20.0	70	50	M12	60	ER32	2.84
	SK50AD/B-ER32-100	P2537024	1.0 - 20.0	100	50	M12	60	ER32	3.29
	SK50AD/B-ER32-130	P2771820	1.0 - 20.0	130	50	M12	73	ER32	3.67
	SK50AD/B-ER32-160	P2771821	1.0 - 20.0	160	50	M12	73	ER32	4.06
	SK50AD/B-ER40-80	P2537016	2.0 - 30.0	80	63	M12	69	ER40	3.10
	SK50AD/B-ER40-100	P2537025	2.0 - 30.0	100	63	M12	75	ER40	3.56
	SK50AD/B-ER40-130	P2771822	2.0 - 30.0	130	63	M12	75	ER40	4.22
	SK50AD/B-ER40-160	P2771823	2.0 - 30.0	160	63	M12	75	ER40	4.88

► CAT(ASME B5.50) taper and Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D30

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER



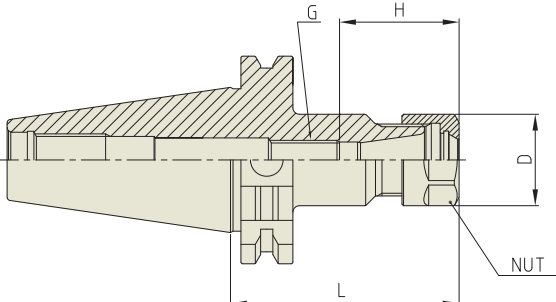

DIN
69871-
SK

AT3

6.3G

15,000
RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
30	SK30-ER11-55	P2527001	0.5 - 7.0	55	19	M6	45	ER11	0.43
	SK30-ER16-55	P2527002	0.5 - 10.0	55	28	M10	45	ER16	0.44
	SK30-ER20-55	P2527003	0.5 - 13.0	55	34	M12	50	ER20	0.44
	SK30-ER25-55	P2527004	1.0 - 16.0	55	42	M12	65	ER25	0.42
	SK30-ER32-60	P2527005	1.0 - 20.0	60	50	M12	65	ER32	0.46
40	SK40-ER11-70	P2527006	0.5 - 7.0	70	19	M6	45	ER11	0.90
	SK40-ER11-100	P2527027	0.5 - 7.0	100	19	M6	45	ER11	0.95
	SK40-ER16-70	P2776417	0.5 - 10.0	70	28	M10	45	ER16	0.44
	SK40-ER16-100	P2527018	0.5 - 10.0	100	28	M10	45	ER16	0.56
	SK40-ER16-130	P2527028	0.5 - 10.0	130	28	M10	45	ER16	0.69
	SK40-ER16-160	P2527029	0.5 - 10.0	160	28	M10	45	ER16	0.81
	SK40-ER20-70	P2776418	0.5 - 13.0	70	34	M12	50	ER20	0.47
	SK40-ER20-100	P2527019	0.5 - 13.0	100	34	M12	50	ER20	0.64
	SK40-ER20-130	P2527030	0.5 - 13.0	130	34	M12	50	ER20	0.80
	SK40-ER20-160	P2527031	0.5 - 13.0	160	34	M12	50	ER20	1.00
	SK40-ER25-70	P2776419	1.0 - 16.0	70	42	M12	65	ER25	0.56
	SK40-ER25-100	P2776429	1.0 - 16.0	100	42	M12	65	ER25	0.84
	SK40-ER25-130	P2527032	1.0 - 16.0	130	42	M12	65	ER25	1.14
	SK40-ER25-160	P2527033	1.0 - 16.0	160	42	M12	65	ER25	1.44
	SK40-ER32-70	P2776420	1.0 - 20.0	70	50	M12	65	ER32	0.51
	SK40-ER32-100	P2776430	1.0 - 20.0	100	50	M12	65	ER32	0.88
	SK40-ER32-130	P2527034	1.0 - 20.0	130	50	M12	65	ER32	1.21
	SK40-ER32-160	P2527035	1.0 - 20.0	160	50	M12	65	ER32	1.54
	SK40-ER40-80	P2527011	2.0 - 30.0	80	63	M12	69	ER40	0.65
	SK40-ER40-100	P2527036	2.0 - 30.0	100	63	M12	69	ER40	0.90
	SK40-ER40-130	P2527037	2.0 - 30.0	130	63	M12	69	ER40	1.34
	SK40-ER40-160	P2527038	2.0 - 30.0	160	63	M12	69	ER40	1.77

► CAT(ASME B5.50) taper and Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D31

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions


 YG-1 CO., LTD.

ER COLLET
CHUCK

ER

ER COLLET CHUCK (SLIM)

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

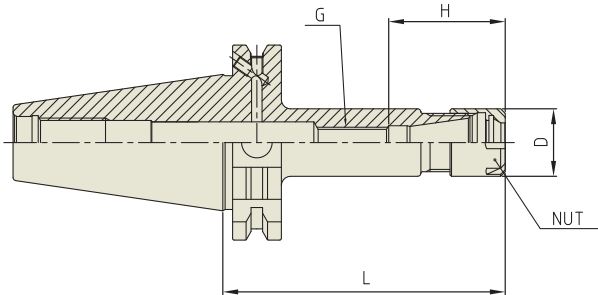

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
40	SK40AD/B-ER11M-100	P2802661	0.5 - 7.0	100	16	M6	29.5	ER11M / ER11	-
	SK40AD/B-ER11M-130	P2802662	0.5 - 7.0	130	16	M6	29.5	ER11M / ER11	-
	SK40AD/B-ER11M-160	P2802663	0.5 - 7.0	160	16	M6	29.5	ER11M / ER11	-
	SK40AD/B-ER16M-100	P2802664	0.5 - 10.0	100	22	M10	38	ER16M / ER16	-
	SK40AD/B-ER16M-130	P2802665	0.5 - 10.0	130	22	M10	38	ER16M / ER16	-
	SK40AD/B-ER16M-160	P2802666	0.5 - 10.0	160	22	M10	38	ER16M / ER16	-
	SK40AD/B-ER20M-100	P2802667	0.5 - 13.0	100	28	M12	44.5	ER20M / ER20	-
	SK40AD/B-ER20M-130	P2802668	0.5 - 13.0	130	28	M12	44.5	ER20M / ER20	-
	SK40AD/B-ER20M-160	P2802669	0.5 - 13.0	160	28	M12	44.5	ER20M / ER20	-
	SK40AD/B-ER25M-100	P2802670	0.5 - 16.0	100	35	M12	52	ER25M / ER25	-
	SK40AD/B-ER25M-130	P2802671	0.5 - 16.0	130	35	M12	52	ER25M / ER25	-
	SK40AD/B-ER25M-160	P2802672	0.5 - 16.0	160	35	M12	52	ER25M / ER25	-
50	SK50AD/B-ER16M-100	P2802673	0.5 - 10.0	100	22	M10	38	ER16M / ER16	-
	SK50AD/B-ER16M-130	P2802674	0.5 - 10.0	130	22	M10	38	ER16M / ER16	-
	SK50AD/B-ER16M-160	P2802675	0.5 - 10.0	160	22	M10	38	ER16M / ER16	-
	SK50AD/B-ER20M-100	P2802676	0.5 - 13.0	100	28	M12	44.5	ER20M / ER20	-
	SK50AD/B-ER20M-130	P2802677	0.5 - 13.0	130	28	M12	44.5	ER20M / ER20	-
	SK50AD/B-ER20M-160	P2802678	0.5 - 13.0	160	28	M12	44.5	ER20M / ER20	-
	SK50AD/B-ER25M-100	P2802679	0.5 - 16.0	100	35	M12	52	ER25M / ER25	-
	SK50AD/B-ER25M-130	P2802680	0.5 - 16.0	130	35	M12	52	ER25M / ER25	-
	SK50AD/B-ER25M-160	P2802681	0.5 - 16.0	160	35	M12	52	ER25M / ER25	-

- CAT(ASME B5.50) taper and Inch type products are available.
- For applicable ER collet, please refer to page D296~D304.
- For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

END MILL
HOLDER

EMH


END MILL HOLDER (SHORT TYPE)

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	SK40-EMH16-35	P2521001	16	48	35	51	24	-	M14	1	0.80
	SK40-EMH20-35	P2521027	20	50	35	51	25	-	M16	1	0.90
	SK40-EMH25-60	P2521003	25	50	60	59	24	25	M18 / M14	2	1.20
	SK40-EMH32-75	P2521030	32	72	75	66	24	28	M20 / M14	2	1.80
50	SK50-EMH25-60	P2521031	25	65	60	60	23.5	25.4	M18 / M14	2	3.35
	SK50-EMH32-60	P2521032	32	72	60	63	24	24.9	M20 / M14	2	3.50

- CAT(ASME B5.50) taper and Inch type products are available.

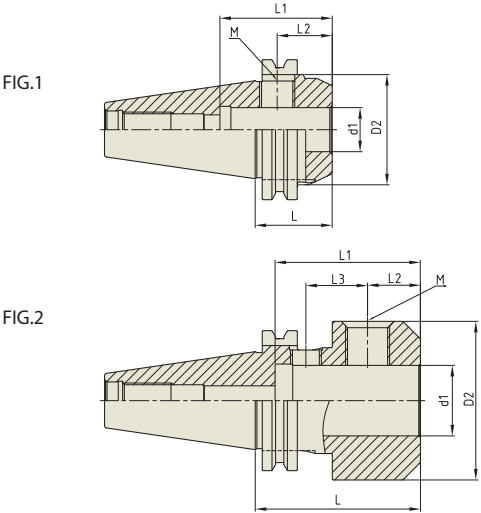

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

YGG

END MILL
HOLDER

EMH

END MILL HOLDER

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
30	SK30-EMH6-50	P2521004	6	25	50	35	18	-	M6	1	0.73
	SK30-EMH8-50	P2521005	8	28	50	35	18	-	M8	1	0.83
	SK30-EMH10-50	P2521006	10	35	50	42	20	-	M10	1	0.90
	SK30-EMH12-50	P2521007	12	42	50	47	22.5	-	M12	1	0.90
	SK30-EMH16-63	P2521008	16	48	63	50	24	-	M14	1	1.10
40	SK40-EMH6-50	P2521009	6	25	50	35	18	-	M6	1	0.86
	SK40-EMH8-50	P2521010	8	28	50	35	18	-	M8	1	0.89
	SK40-EMH10-50	P2521011	10	35	50	39	20	-	M10	1	0.95
	SK40-EMH12-50	P2521012	12	42	50	46	22.5	-	M12	1	1.03
	SK40-EMH16-63	P2521013	16	48	63	57	24	-	M14	1	1.26
	SK40-EMH20-63	P2521014	20	52	63	54	25	-	M16	1	1.28
	SK40-EMH25-100	P2521015	25	65	100	60	24	25	M18	2	2.28
50	SK40-EMH32-100	P2521016	32	72	100	64	24	28	M20	2	2.50
	SK50-EMH6-63	P2521017	6	25	63	35	18	-	M6	1	2.70
	SK50-EMH8-63	P2521018	8	28	63	35	18	-	M8	1	2.70
	SK50-EMH10-63	P2521019	10	35	63	39	20	-	M10	1	2.90
	SK50-EMH12-63	P2521020	12	42	63	46	22.5	-	M12	1	2.90
	SK50-EMH16-63	P2521021	16	48	63	49	24	-	M14	1	3.00
	SK50-EMH20-63	P2521022	20	52	63	52	25	-	M16	1	3.05
	SK50-EMH25-80	P2521023	25	65	80	60	24	25	M18	2	3.73
	SK50-EMH32-100	P2521024	32	72	100	64	24	28	M20	2	4.53
	SK50-EMH40-100	P2521025	40	80	100	74	30	32	M20	2	4.77
	SK50-EMH50-125	P2521026	50	100	125	84	35	35	M24	2	7.03

► CAT(ASME B5.50) taper and Inch type products are available.

► Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

YGG

END MILL
HOLDER

EMH

END MILL HOLDER

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD/B

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	SK40AD/B-EMH6-50	P2531009	6	25	50	35	18	-	M6	1	0.86
	SK40AD/B-EMH8-50	P2531010	8	28	50	35	18	-	M8	1	0.89
	SK40AD/B-EMH10-50	P2531011	10	35	50	39	20	-	M10	1	0.95
	SK40AD/B-EMH12-50	P2531012	12	42	50	46	22.5	-	M12	1	1.03
	SK40AD/B-EMH16-63	P2531013	16	48	63	57	24	-	M14	1	1.28
	SK40AD/B-EMH20-63	P2531014	20	52	63	54	25	-	M16	1	1.28
	SK40AD/B-EMH25-100	P2531015	25	65	100	60	24	25	M18	2	2.28
	SK40AD/B-EMH32-100	P2531016	32	72	100	64	24	28	M20	2	2.50
	SK50AD/B-EMH6-63	P2531017	6	25	63	35	18	-	M6	1	2.70
50	SK50AD/B-EMH8-63	P2531018	8	28	63	35	18	-	M8	1	2.70
	SK50AD/B-EMH10-63	P2531019	10	35	63	39	20	-	M10	1	2.90
	SK50AD/B-EMH12-63	P2531020	12	42	63	44	22.5	-	M12	1	2.90
	SK50AD/B-EMH16-63	P2531021	16	48	63	47	24	-	M14	1	3.00
	SK50AD/B-EMH20-63	P2531022	20	52	63	51	25	-	M16	1	3.05
	SK50AD/B-EMH25-80	P2531023	25	65	80	60	24	25	M18	2	3.73
	SK50AD/B-EMH32-100	P2531024	32	72	100	64	24	28	M20	2	4.53
	SK50AD/B-EMH40-100	P2531025	40	80	100	74	30	32	M20	2	4.77
	SK50AD/B-EMH50-125	P2531026	50	100	125	84	35	35	M24	2	7.03

► CAT(ASME B5.50) taper and Inch type products are available.

► Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

D38

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YGG

YG-1 CO., LTD.

YGG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D39

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

END MILL HOLDER

EMH


END MILL HOLDER (COOLANT CHANNEL)

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

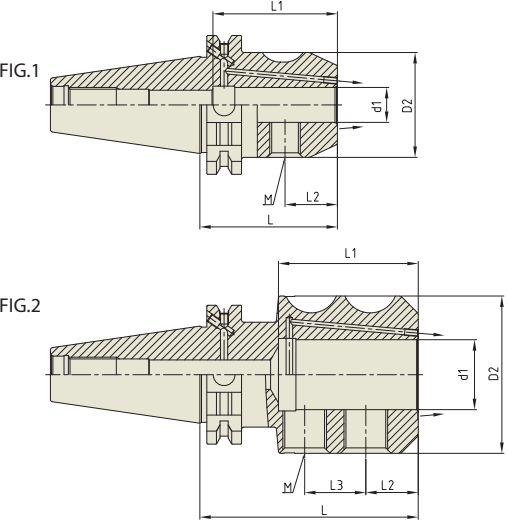

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD/B+C

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	SK40AD/B-EMH6C-50	P2779001	6	25	50	35	18	-	M6	1	0.86
	SK40AD/B-EMH8C-50	P2779002	8	28	50	35	18	-	M8	1	0.89
	SK40AD/B-EMH10C-50	P2779003	10	35	50	39	20	-	M10	1	0.95
	SK40AD/B-EMH12C-50	P2779004	12	42	50	46	22.5	-	M12	1	1.03
	SK40AD/B-EMH14C-50	P2779005	14	44	50	48	22.5	-	M12	1	1.26
	SK40AD/B-EMH16C-63	P2779006	16	48	63	54	24	-	M14	1	1.28
	SK40AD/B-EMH18C-63	P2779007	18	50	63	54	24	-	M14	1	1.35
	SK40AD/B-EMH20C-63	P2779008	20	52	63	55	25	-	M16	1	1.28
	SK40AD/B-EMH25C-100	P2779009	25	65	100	59	24	25	M18	2	2.28
	SK40AD/B-EMH32C-100	P2779010	32	72	100	64	24	28	M20	2	2.50
50	SK50AD/B-EMH6C-63	P2779011	6	25	63	35	18	-	M6	1	2.70
	SK50AD/B-EMH8C-63	P2779012	8	28	63	35	18	-	M8	1	2.70
	SK50AD/B-EMH10C-63	P2779013	10	35	63	39	20	-	M10	1	2.90
	SK50AD/B-EMH12C-63	P2779014	12	42	63	46	22.5	-	M12	1	2.90
	SK50AD/B-EMH14C-63	P2779015	14	44	63	46	22.5	-	M12	1	2.90
	SK50AD/B-EMH16C-63	P2779016	16	48	63	46	24	-	M14	1	3.00
	SK50AD/B-EMH18C-63	P2779017	18	50	63	46	24	-	M14	1	3.00
	SK50AD/B-EMH20C-63	P2779018	20	52	63	56	25	-	M16	1	3.05
	SK50AD/B-EMH25C-80	P2779019	25	65	80	60	24	25	M18	2	3.73
	SK50AD/B-EMH32C-100	P2779020	32	72	100	64	24	28	M20	2	4.53
	SK50AD/B-EMH40C-120	P2779021	40	80	120	74	30	32	M20	2	4.77
	SK50AD/B-EMH50C-125	P2779022	50	100	125	84	35	35	M24	2	7.03

Unit : mm

► CAT(ASME B5.50) taper and Inch type products are available.
► Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.
► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM


ACCESSORY & PARTS


SHELL MILL ARBOR

SMA

SHELL MILL ARBOR

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS

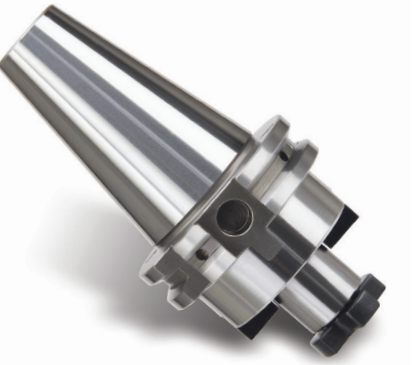

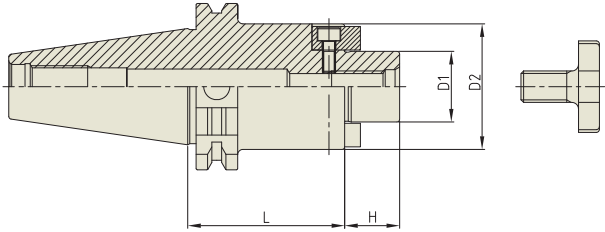

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD

TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
30	SK30-SMA16-50	P2778901	16	32	50	17	M8x16L	0.85
	SK30-SMA22-50	P2778902	22	40	50	19	M10x18L	0.90
	SK30-SMA27-50	P2778903	27	48	50	21	M12x22L	1.03
40	SK40-SMA16-60	P2778904	16	32	60	17	M8x16L	0.35
	SK40-SMA16-120	P2778915	16	32	120	17	M8x16L	1.70
	SK40-SMA22-60	P2778905	22	40	60	19	M10x18L	1.45
	SK40-SMA22-120	P2778916	22	40	120	19	M10x18L	1.80
	SK40-SMA27-60	P2778906	27	48	60	21	M12x22L	1.70
	SK40-SMA27-120	P2778917	27	48	120	21	M12x22L	2.40
	SK40-SMA32-60	P2778907	32	58	60	24	M16x26L	1.80
	SK40-SMA32-120	P2778918	32	58	120	24	M16x26L	3.70
	SK40-SMA40-60	P2778908	40	70	60	27	M20x30L	3.10
	50	SK50-SMA16-75	P2778909	16	32	75	17	M8x16L
SK50-SMA16-120		P2778919	16	32	120	17	M8x16L	3.90
SK50-SMA22-75		P2778910	22	40	75	19	M10x18L	3.10
SK50-SMA22-120		P2778920	22	40	120	19	M10x18L	4.40
SK50-SMA27-75		P2778911	27	48	75	21	M12x22L	3.40
SK50-SMA27-120		P2778921	27	48	120	21	M12x22L	4.70
SK50-SMA32-75		P2778912	32	58	75	24	M16x26L	3.80
SK50-SMA32-120		P2778922	32	58	120	24	M16x26L	5.00
SK50-SMA40-75		P2778913	40	70	75	27	M20x30L	4.50
SK50-SMA40-120		P2778923	40	70	120	27	M20x30L	6.05
SK50-SMA50-75		P2778914	50	90	75	30	M24x36L	5.90

► CAT(ASME B5.50) taper and Inch type products are available.
► For parts, please refer to page D307.

D40

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D41

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHELL MILL
ARBOR

SMA

SHELL MILL ARBOR (COOLANT CHANNEL & SMALL FACE)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS



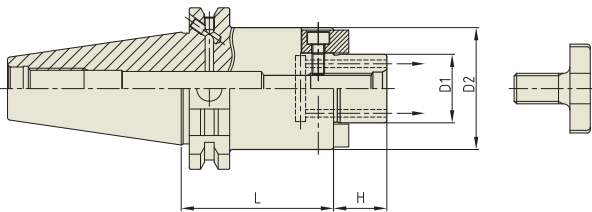

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD/B+C

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
40	SK40AD/B-SMA16C-60	P2801004C	16	32	60	17	M8x16L	0.35
	SK40AD/B-SMA16C-120	P2801015C	16	32	120	17	M8x16L	0.70
	SK40AD/B-SMA22C-44	P2803003C	22	40	44	19	M10x18L	1.03
	SK40AD/B-SMA22C-100	P2803004C	22	40	100	19	M10x18L	1.60
	SK40AD/B-SMA22C-120	P2801016C	22	40	120	19	M10x18L	1.90
	SK40AD/B-SMA27C-44	P2803006C	27	48	44	21	M12x22L	1.16
	SK40AD/B-SMA27C-100	P2803007C	27	48	100	21	M12x22L	1.97
	SK40AD/B-SMA27C-120	P2801017C	27	48	120	21	M12x22L	2.23
	SK40AD/B-SMA32C-60	P2801007C	32	58	60	24	M16x26L	1.64
	SK40AD/B-SMA32C-120	P2801018C	32	58	120	24	M16x26L	2.00
	SK40AD/B-SMA40C-60	P2803011C	40	70	60	27	M20x30L	1.83
	SK40AD/B-SMA40C-120	P2803012C	40	70	120	27	M20x30L	2.10
50	SK50AD/B-SMA16C-75	P2801009C	16	32	75	17	M8x16L	2.20
	SK50AD/B-SMA16C-120	P2801019C	16	32	120	17	M8x16L	2.50
	SK50AD/B-SMA22C-44	P2803015C	22	40	44	19	M10x18L	2.84
	SK50AD/B-SMA22C-75	P2801010C	22	40	75	19	M10x18L	3.10
	SK50AD/B-SMA22C-100	P2803017C	22	40	100	19	M10x18L	3.37
	SK50AD/B-SMA22C-120	P2801020C	22	40	120	19	M10x18L	3.60
	SK50AD/B-SMA22C-160	P2803019C	22	40	160	19	M10x18L	3.93
	SK50AD/B-SMA27C-75	P2801011C	27	48	75	21	M12x22L	3.40
	SK50AD/B-SMA27C-100	P2803021C	27	48	100	21	M12x22L	3.74
	SK50AD/B-SMA27C-120	P2801021C	27	48	120	21	M12x22L	4.00
	SK50AD/B-SMA27C-160	P2803023C	27	48	160	21	M12x22L	4.42
	SK50AD/B-SMA32C-75	P2801012C	32	58	75	24	M16x26L	3.80
	SK50AD/B-SMA32C-100	P2803025C	32	58	100	24	M16x26L	4.28
	SK50AD/B-SMA32C-120	P2801022C	32	58	120	24	M16x26L	4.40
	SK50AD/B-SMA32C-160	P2803027C	32	58	160	24	M16x26L	5.45
	SK50AD/B-SMA40C-75	P2801013C	40	70	75	27	M20x30L	4.50
	SK50AD/B-SMA40C-100	P2803029C	40	70	100	27	M20x30L	5.11
	SK50AD/B-SMA40C-120	P2801023C	40	70	120	27	M20x30L	5.30
	SK50AD/B-SMA40C-160	P2803031C	40	70	160	27	M20x30L	6.78

► CAT(ASME B5.50) taper and Inch type products are available.
► With "Coolant Through" by coolant channels.
► For parts, please refer to page D311.

D42

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHELL MILL
ARBOR

SMA

SHELL MILL ARBOR (COOLANT CHANNEL & LARGE FACE)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS



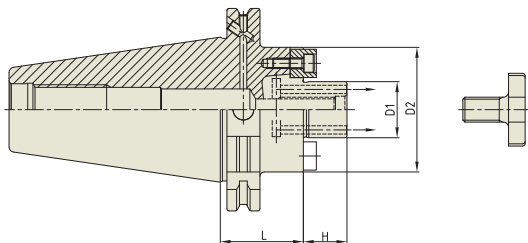

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD/B+C

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
40	SK40AD/B-SMA16CE-35	P2803101CE	16	38	35	17	M8x16L	0.94
	SK40AD/B-SMA16CE-100	P2803102CE	16	38	100	17	M8x16L	1.50
	SK40AD/B-SMA22CE-35	P2803103CE	22	48	35	19	M10x18L	1.05
	SK40AD/B-SMA22CE-100	P2803104CE	22	48	100	19	M10x18L	1.95
	SK40AD/B-SMA27CE-45	P2803105CE	27	60	45	21	M12x22L	1.33
	SK40AD/B-SMA27CE-100	P2803106CE	27	60	100	21	M12x22L	2.59
	SK40AD/B-SMA32CE-50	P2803107CE	32	78	50	24	M16x26L	1.72
	SK40AD/B-SMA40CE-50	P2803108CE	40	89	50	27	M20x30L	1.99
	SK50AD/B-SMA16CE-100	P2803109CE	16	38	100	17	M8x16L	3.27
	SK50AD/B-SMA22CE-35	P2803110CE	22	48	35	19	M10x18L	2.83
50	SK50AD/B-SMA22CE-100	P2803111CE	22	48	100	19	M10x18L	3.72
	SK50AD/B-SMA22CE-160	P2803112CE	22	48	160	19	M10x18L	4.54
	SK50AD/B-SMA27CE-40	P2803113CE	27	60	40	21	M12x22L	3.09
	SK50AD/B-SMA27CE-100	P2803114CE	27	60	100	21	M12x22L	4.35
	SK50AD/B-SMA27CE-160	P2803115CE	27	60	160	21	M12x22L	5.62
	SK50AD/B-SMA32CE-50	P2803116CE	32	78	50	24	M16x26L	3.82
	SK50AD/B-SMA32CE-100	P2803117CE	32	78	100	24	M16x26L	5.64
	SK50AD/B-SMA32CE-160	P2803118CE	32	78	160	24	M16x26L	7.81
	SK50AD/B-SMA40CE-50	P2803119CE	40	89	50	27	M20x30L	4.27
	SK50AD/B-SMA40CE-100	P2803120CE	40	89	100	27	M20x30L	6.61
	SK50AD/B-SMA40CE-160	P2803121CE	40	89	160	27	M20x30L	9.43

► CAT(ASME B5.50) taper and Inch type products are available.
► With "Coolant Through" by coolant channels.
► For parts, please refer to page D311.

D43

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHELL MILL
ARBOR

SMF

SHELL MILL ARBOR (FLANGE MOUNTING)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS

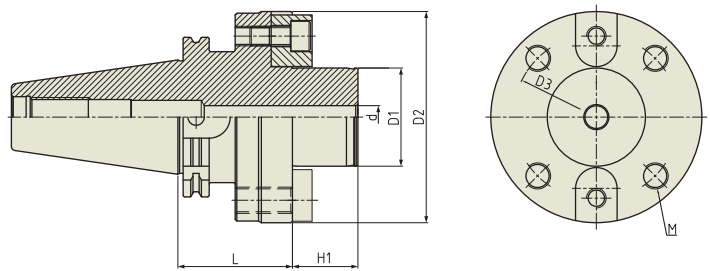



Unit : mm											
TAPER No.	MODEL No.	EDP No.	d	D1	D2	D3	L	H1	M (TAP)	DRIVE KEY & BOLT	WEIGHT (Kg)
50	SK50-SMF40-70	P2524024	14	40	89	66.7	70	30	4-M12	15.9 x 16 x 21.5, M6-15L	-
	SK50-SMF60-70	P2800061	14	60	129	101.6	70	40	4-M16	25.4 x 25.4 x 31.5, M12-25L	-

► CAT(ASME B5.50) taper and Inch type products are available.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




COMBI-SHELL
MILL ARBOR

CMA

COMBI-SHELL MILL ARBOR

KOMBI-AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES COMBINÉS
MANDRINO PORTA FRESE
PORTA FRESAS COMBINADO

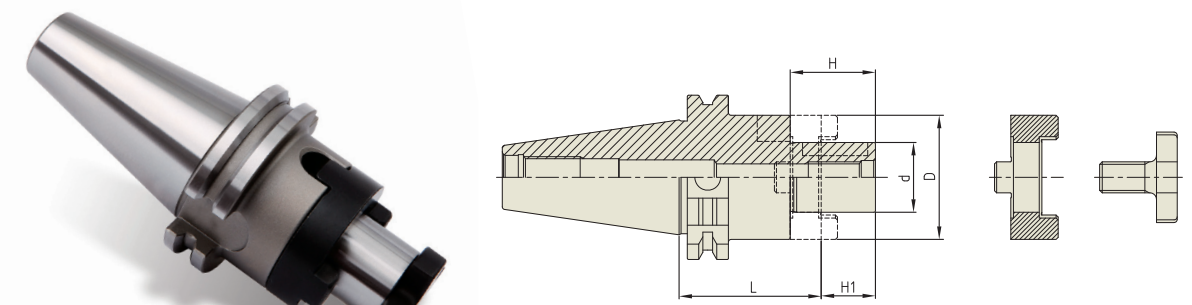



Unit : mm								
TAPER No.	MODEL No.	EDP No.	d	L	D	H1	H	WEIGHT (Kg)
30	SK30-CMA16-50	P2524001	16	50	32	17	27	0.58
	SK30-CMA22-50	P2524002	22	50	40	19	31	0.71
	SK30-CMA27-55	P2524003	27	55	48	21	33	0.78
40	SK40-CMA16-55	P2524004	16	55	32	17	27	1.03
	SK40-CMA16-100	P2524015	16	100	32	17	27	1.27
	SK40-CMA22-55	P2524005	22	55	40	19	31	1.17
	SK40-CMA22-100	P2524016	22	100	40	19	31	1.59
	SK40-CMA27-55	P2524006	27	55	48	21	33	1.37
	SK40-CMA27-100	P2524017	27	100	48	21	33	1.94
	SK40-CMA32-60	P2524007	32	60	58	24	38	1.6
	SK40-CMA32-100	P2524018	32	100	58	24	38	2.40
	SK40-CMA40-60	P2524008	40	60	70	27	41	2.31
50	SK50-CMA16-55	P2524009	16	55	32	17	27	2.81
	SK50-CMA16-100	P2524019	16	100	32	17	27	3.07
	SK50-CMA22-55	P2524010	22	55	40	19	31	2.91
	SK50-CMA22-100	P2524020	22	100	40	19	31	3.38
	SK50-CMA27-55	P2524011	27	55	48	21	33	3.15
	SK50-CMA27-100	P2524021	27	100	48	21	33	3.76
	SK50-CMA32-55	P2524012	32	55	58	24	38	3.41
	SK50-CMA32-100	P2524022	32	100	58	24	38	4.23
	SK50-CMA40-55	P2524013	40	55	70	27	41	3.78
	SK50-CMA40-100	P2524023	40	100	70	27	41	5.06
	SK50-CMA50-70	P2524014	50	70	90	30	46	5.35

► CAT(ASME B5.50) taper and Inch type products are available.
► For parts, please refer to page D312.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




POWER
MILLING CHUCK

C

HIGH-SPEED POWER MILLING CHUCK

HOCHGESCHWINDIGKEITS FRÄSERFUTTER
MANDRIN PORTE FRAISE À GRANDE VITESSE
MANDRINI PORTA FRESA PER ALTA VELOCITÀ
PORTAHERRAMIENTAS PARA FRESADO DE ALTA VELOCIDAD



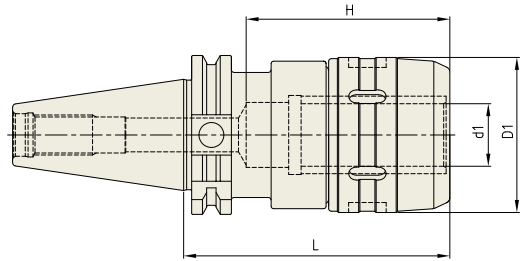

DIN
69871-
SK



6.3G





Unit : mm							
TAPER No.	MODEL No.	EDP No.	d1	D1	L	H	WEIGHT (Kg)
30	SK30-C20-80HS	P2773005	20	54	80	70	1.15
	SK30-C25-80HS	P2773006	25	62	70	80	1.48
40	SK40-C20-105HS	P2526022	20	54	105	70	1.77
	SK40-C25-105HS	P2773001	25	62	105	80	2.10
	SK40-C32-105HS	P2526023	32	72	105	100	2.40
	SK40-C32-135HS	P2773007	32	72	135	100	3.10
50	SK50-C20-105HS	P2773002	20	54	105	70	3.40
	SK50-C25-105HS	P2773003	25	62	105	80	3.80
	SK50-C32-105HS	P2773004	32	72	105	100	4.30
	SK50-C32-135HS	P2526024	32	72	135	100	4.90
	SK50-C32-165HS	P2526025	32	72	165	100	5.60
	SK50-C42-115HS	P2773008	42	92	115	110	4.60
	SK50-C42-135HS	P2773009	42	92	135	110	5.60
	SK50-C42-165HS	P2773010	42	92	165	110	6.10

► CAT(ASME B5.50) taper and Inch type products are available.

► Balancing Grade is adjusted on Basic holder only without Clamping Cap.

► For applicable collet and spanner, please refer to page D314.

D46

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




POWER
MILLING CHUCK

C

POWER MILLING CHUCK

FRÄSERSPANNFUTTER
MANDRIN PORTE FRAISE
MANDRINI PORTA FRESA
PORTAHERRAMIENTAS PARA FRESADO



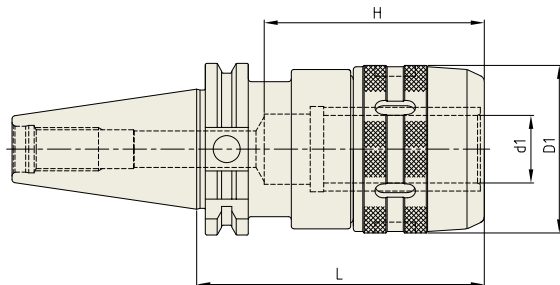

DIN
69871-
SK





Unit : mm							
TAPER No.	MODEL No.	EDP No.	d1	D1	L	H	WEIGHT (Kg)
30	SK30-C20-80	P2526001	20	54	80	70	1.15
	SK30-C25-80	P2526002	25	62	80	80	1.48
40	SK40-C20-90	P2526003	20	54	90	70	1.60
	SK40-C20-105	P2526008	20	54	105	70	1.77
	SK40-C25-105	P2526009	25	62	105	80	2.01
	SK40-C32-90	P2526004	32	72	90	100	2.00
	SK40-C32-105	P2526010	32	72	105	100	2.42
	SK40-C32-135	P2526015	32	72	135	100	3.11
	SK50-C20-80	P2526005	20	54	80	70	3.22
50	SK50-C20-105	P2526011	20	54	105	70	3.39
	SK50-C25-90	P2526006	25	62	90	80	3.61
	SK50-C25-105	P2526012	25	62	105	80	3.78
	SK50-C32-90	P2526007	32	72	90	100	3.87
	SK50-C32-105	P2526013	32	72	105	100	4.31
	SK50-C32-135	P2526018	32	72	135	100	4.94
	SK50-C32-165	P2526020	32	72	165	100	5.59
	SK50-C42-115	P2526014	42	92	115	110	4.53
	SK50-C42-135	P2526017	42	92	135	110	5.62
	SK50-C42-165	P2526016	42	92	165	110	6.10


► CAT(ASME B5.50) taper and Inch type products are available.

► For applicable collet and spanner, please refer to the page D314.

D47



phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

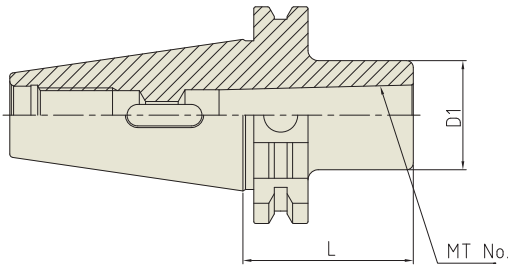TOOLING SYSTEM	 MORSE TAPER ARBOR		MTA	
	MORSE TAPER ARBOR EINSATZHÜSEN FÜR MORSEKEGEL DOUILLES DE RÉDUCTION CÔNE MORSE MANDRINO RIDUZIONE CONO MORSE REDUCTORES A MORSE			
SK (DIN 69871)	 			
CBT (BT DUAL CONTACT)				
BT (JIS B6339/ MAS 403)				
HSK (DIN 69893/ ISO 12164)				
STRAIGHT				
ISO, NT, MTA/MTB, GOST				
TOOL HOLDER SET				
BORING SYSTEM				
ACCESSORY & PARTS				

						Unit : mm
TAPER No.	MODEL No.	EDP No.	MT No.	D1	L	WEIGHT (Kg)
30	SK30-MTA1-50	P2522001	1	25	50	0.72
	SK30-MTA2-60	P2522002	2	32	60	0.87
	SK30-MTA3-80	P2522003	3	40	80	1.02
40	SK40-MTA1-50	P2522004	1	25	50	1.49
	SK40-MTA2-50	P2522005	2	32	50	1.62
	SK40-MTA3-70	P2522006	3	40	70	1.65
	SK40-MTA4-95	P2522007	4	48	95	1.90
50	SK50-MTA1-45	P2522008	1	25	45	2.60
	SK50-MTA2-60	P2522009	2	32	60	2.66
	SK50-MTA3-65	P2522010	3	40	65	2.75
	SK50-MTA4-95	P2522011	4	48	95	3.00
	SK50-MTA5-105	P2522012	5	63	105	3.30

► CAT(ASME B5.50) taper and Inch type products are available.

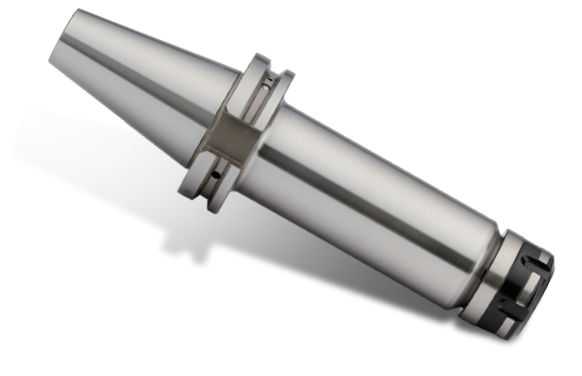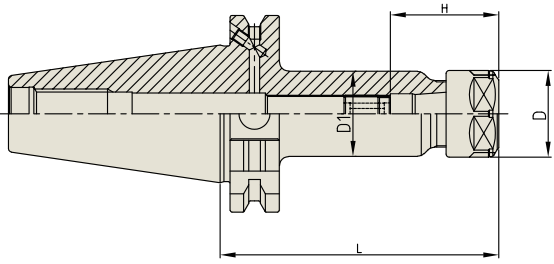	SK SLIM CHUCK		SKA	TOOLING SYSTEM
SK SLIM CHUCK SK SCHLANKE FUTTER MANDRIN TYPE SK MINCE SK MANDRINI SOTTILI PORTAHERRAMIENTAS SK EJE REDUCIDO				SK (DIN 69871)
 				CBT (BT DUAL CONTACT) BT (JIS B6339/ MAS 403)
				HSK (DIN 69893/ ISO 12164)
				STRAIGHT
				ISO, NT, MTA/MTB, GOST
				TOOL HOLDER SET
DIN 69871- SK  2.5G 25,000 RPM 				BORING SYSTEM
Unit : mm				ACCESSORY & PARTS

									Unit : mm
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	D1	H	COLLET	WEIGHT (Kg)
40	SK40AD/B-SKA06-60	P2802901	1.8 - 6.0	60	20	19.5	31	SKC6	-
	SK40AD/B-SKA06-90	P2802902	1.8 - 6.0	90	20	19.5	31	SKC6	-
	SK40AD/B-SKA06-120	P2802903	1.8 - 6.0	120	20	19.5	31	SKC6	-
	SK40AD/B-SKA06-150	P2802904	1.8 - 6.0	150	20	19.5	31	SKC6	-
	SK40AD/B-SKA10-90	P2802905	1.8 - 10.0	90	28	27.5	35	SKC10	-
	SK40AD/B-SKA10-120	P2802906	1.8 - 10.0	120	28	27.5	35	SKC10	-
	SK40AD/B-SKA10-150	P2802907	1.8 - 10.0	150	28	27.5	35	SKC10	-
	SK40AD/B-SKA13-90	P2802908	2.75 - 13.0	90	33	33	43.6	SKC13	-
	SK40AD/B-SKA13-120	P2802909	2.75 - 13.0	120	33	33	43.6	SKC13	-
	SK40AD/B-SKA13-150	P2802910	2.75 - 13.0	150	33	33	43.6	SKC13	-
	SK40AD/B-SKA16-90	P2802911	2.75 - 16.0	90	40	40	52	SKC16	-
	SK40AD/B-SKA16-120	P2802912	2.75 - 16.0	120	40	40	52	SKC16	-
	SK40AD/B-SKA16-150	P2802913	2.75 - 16.0	150	40	40	52	SKC16	-
	SK40AD/B-SKA20-90	P2802914	3.5 - 20.0	90	48.5	48.5	59.6	SKC20	-
	SK40AD/B-SKA20-120	P2802915	3.5 - 20.0	120	48.5	48.5	59.6	SKC20	-
	SK40AD/B-SKA20-150	P2802916	3.5 - 20.0	150	48.5	48.5	59.6	SKC20	-
	SK40AD/B-SKA25-90	P2802917	16.0 - 25.4	90	55	55	63.4	SKC25	-
	SK40AD/B-SKA25-120	P2802918	16.0 - 25.4	120	55	55	63.4	SKC25	-
SK40AD/B-SKA25-150	P2802919	16.0 - 25.4	150	55	55	63.4	SKC25	-	

- ▶ CAT(ASME B5.50) taper products are available.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
- ▶ For applicable Collet, Nut and Spanner, please refer to page D315~D317.

▶ NEXT PAGE

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM



ACCESSORY
& PARTS

SK SLIM
CHUCK

SKA

SK SLIM CHUCK

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO

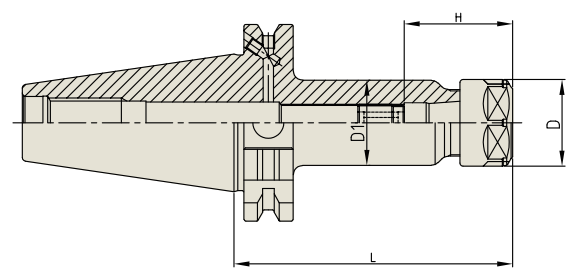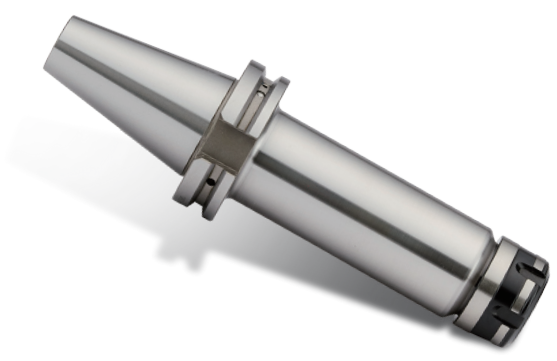

DIN 69871-SK

AT3

2.5G

25,000 RPM

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	D1	H	COLLET	WEIGHT (Kg)
50	SK50AD/B-SKA06-105	P2802920	1.8 - 6.0	105	20	19.5	31	SKC6	-
	SK50AD/B-SKA06-135	P2802921	1.8 - 6.0	135	20	19.5	31	SKC6	-
	SK50AD/B-SKA06-165	P2802922	1.8 - 6.0	165	20	19.5	31	SKC6	-
	SK50AD/B-SKA06-195	P2802923	1.8 - 6.0	195	20	19.5	31	SKC6	-
	SK50AD/B-SKA10-105	P2802924	1.75 - 10.0	105	28	27.5	35	SKC10	-
	SK50AD/B-SKA10-135	P2802925	1.75 - 10.0	135	28	27.5	35	SKC10	-
	SK50AD/B-SKA10-165	P2802926	1.75 - 10.0	165	28	27.5	35	SKC10	-
	SK50AD/B-SKA10-195	P2802927	1.75 - 10.0	195	28	27.5	35	SKC10	-
	SK50AD/B-SKA13-105	P2802928	2.75 - 13.0	105	33	33	43.6	SKC13	-
	SK50AD/B-SKA13-135	P2802929	2.75 - 13.0	135	33	33	43.6	SKC13	-
50	SK50AD/B-SKA13-165	P2802930	2.75 - 13.0	165	33	33	43.6	SKC13	-
	SK50AD/B-SKA13-195	P2802931	2.75 - 13.0	195	33	33	43.6	SKC13	-
	SK50AD/B-SKA16-105	P2802932	2.75 - 13.0	105	40	40	52	SKC16	-
	SK50AD/B-SKA16-135	P2802933	2.75 - 13.0	135	40	40	52	SKC16	-
	SK50AD/B-SKA16-165	P2802934	2.75 - 13.0	165	40	40	52	SKC16	-
	SK50AD/B-SKA16-195	P2802935	2.75 - 13.0	195	40	40	52	SKC16	-
	SK50AD/B-SKA20-105	P2802936	3.5 - 20.0	105	48.5	48.5	59.6	SKC20	-
	SK50AD/B-SKA20-135	P2802937	3.5 - 20.0	135	48.5	48.5	59.6	SKC20	-
	SK50AD/B-SKA20-165	P2802938	3.5 - 20.0	165	48.5	48.5	59.6	SKC20	-
	SK50AD/B-SKA20-195	P2802939	3.5 - 20.0	195	48.5	48.5	59.6	SKC20	-
50	SK50AD/B-SKA25-105	P2802940	16.0 - 25.4	105	55	55	63.4	SKC25	-
	SK50AD/B-SKA25-135	P2802941	16.0 - 25.4	135	55	55	63.4	SKC25	-
	SK50AD/B-SKA25-165	P2802942	16.0 - 25.4	165	55	55	63.4	SKC25	-
	SK50AD/B-SKA25-195	P2802943	16.0 - 25.4	195	55	55	63.4	SKC25	-

► CAT(ASME B5.50) taper products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable Collet, Nut and Spanner, please refer to page D315~D317.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM



ACCESSORY
& PARTS

SK SLIM
CHUCK

SKA

SK SLIM CHUCK

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO

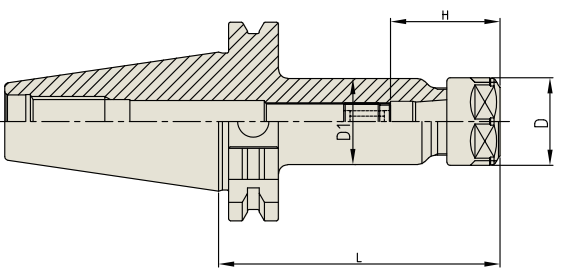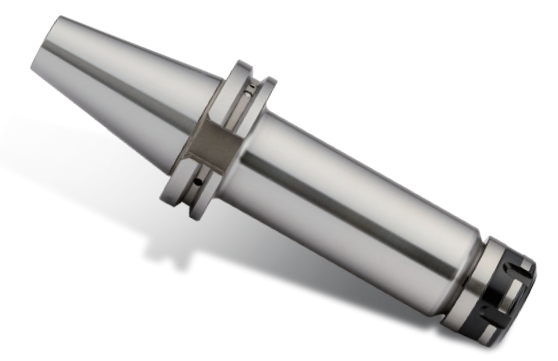

DIN 69871-SK

AT3

6.3G

15,000 RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	D1	H	COLLET	WEIGHT (Kg)
30	SK30-SKA06-60	P2802801	1.8 - 6.0	60	20	19.5	31	SKC6	-
	SK30-SKA06-90	P2802802	1.8 - 6.0	90	20	19.5	31	SKC6	-
	SK30-SKA10-60	P2802803	1.75 - 10.0	60	28	27.5	35	SKC10	-
	SK30-SKA10-90	P2802804	1.75 - 10.0	90	28	27.5	35	SKC10	-
	SK30-SKA13-60	P2802805	2.75 - 13.0	60	33	33	43.6	SKC13	-
	SK30-SKA13-90	P2802806	2.75 - 13.0	90	33	33	43.6	SKC13	-
	SK30-SKA16-60	P2802807	2.75 - 16.0	60	40	40	52	SKC16	-
	SK30-SKA16-90	P2802808	2.75 - 16.0	90	40	40	52	SKC16	-
	SK30-SKA20-60	P2802809	3.5 - 20.0	60	48.5	48.5	59.6	SKC20	-
	SK30-SKA20-90	P2802810	3.5 - 20.0	90	48.5	48.5	59.6	SKC20	-
40	SK30-SKA25-90	P2802811	16.0 - 25.4	90	55	55	63.4	SKC25	-
	SK40-SKA06-90	P2802812	1.8 - 6.0	90	20	19.5	31	SKC6	-
	SK40-SKA06-120	P2802813	1.8 - 6.0	120	20	19.5	31	SKC6	-
	SK40-SKA06-150	P2802814	1.8 - 6.0	150	20	19.5	31	SKC6	-
	SK40-SKA10-90	P2802815	1.75 - 10.0	90	28	27.5	35	SKC10	-
	SK40-SKA10-120	P2802816	1.75 - 10.0	120	28	27.5	35	SKC10	-
	SK40-SKA10-150	P2802817	1.75 - 10.0	150	28	27.5	35	SKC10	-
	SK40-SKA13-90	P2802818	2.75 - 13.0	90	33	33	43.6	SKC13	-
	SK40-SKA13-120	P2802819	2.75 - 13.0	120	33	33	43.6	SKC13	-
	SK40-SKA13-150	P2802820	2.75 - 13.0	150	33	33	43.6	SKC13	-
40	SK40-SKA16-90	P2802821	2.75 - 16.0	90	40	40	52	SKC16	-
	SK40-SKA16-120	P2802822	2.75 - 16.0	120	40	40	52	SKC16	-
	SK40-SKA16-150	P2802823	2.75 - 16.0	150	40	40	52	SKC16	-
	SK40-SKA20-90	P2802824	3.5 - 20.0	90	48.5	48.5	59.6	SKC20	-
	SK40-SKA20-120	P2802825	3.5 - 20.0	120	48.5	48.5	59.6	SKC20	-
	SK40-SKA20-150	P2802826	3.5 - 20.0	150	48.5	48.5	59.6	SKC20	-
	SK40-SKA25-90	P2802827	16.0 - 25.4	90	55	55	63.4	SKC25	-
	SK40-SKA25-120	P2802828	16.0 - 25.4	120	55	55	63.4	SKC25	-
	SK40-SKA25-150	P2802829	16.0 - 25.4	150	55	55	63.4	SKC25	-

► CAT(ASME B5.50) taper products are available.

► For applicable Collet, Nut and Spanner, please refer to page D315~D317.

► NEXT PAGE

D50

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

D51

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





SK SLIM
CHUCK

SKA

SK SLIM CHUCK

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO

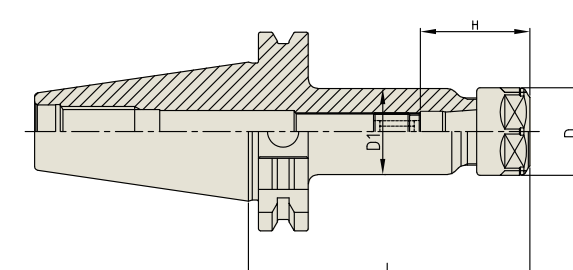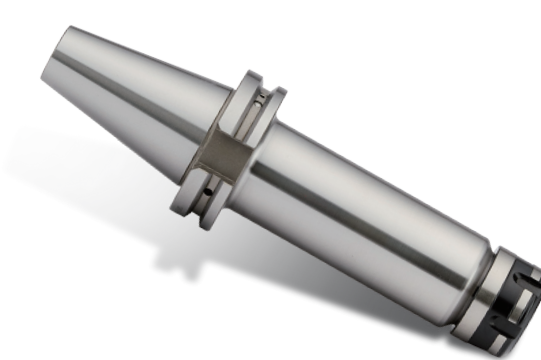

DIN
69871-
SK



6.3G





Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	D1	H	COLLET	WEIGHT (Kg)
50	SK50-SKA06-105	P2802830	1.8 - 6.0	105	20	19.5	31	SKC6	-
	SK50-SKA06-135	P2802831	1.8 - 6.0	135	20	19.5	31	SKC6	-
	SK50-SKA06-165	P2802832	1.8 - 6.0	165	20	19.5	31	SKC6	-
	SK50-SKA06-195	P2802833	1.8 - 6.0	195	20	19.5	31	SKC6	-
	SK50-SKA10-105	P2802834	1.75 - 10.0	105	28	27.5	35	SKC10	-
	SK50-SKA10-135	P2802835	1.75 - 10.0	135	28	27.5	35	SKC10	-
	SK50-SKA10-165	P2802836	1.75 - 10.0	165	28	27.5	35	SKC10	-
	SK50-SKA10-195	P2802837	1.75 - 10.0	195	28	27.5	35	SKC10	-
	SK50-SKA13-105	P2802838	2.75 - 13.0	105	33	33	43.6	SKC13	-
	SK50-SKA13-135	P2802839	2.75 - 13.0	135	33	33	43.6	SKC13	-
	SK50-SKA13-165	P2802840	2.75 - 13.0	165	33	33	43.6	SKC13	-
	SK50-SKA13-195	P2802841	2.75 - 13.0	195	33	33	43.6	SKC13	-
	SK50-SKA16-105	P2802842	2.75 - 16.0	105	40	40	52	SKC16	-
	SK50-SKA16-135	P2802843	2.75 - 16.0	135	40	40	52	SKC16	-
	SK50-SKA16-165	P2802844	2.75 - 16.0	165	40	40	52	SKC16	-
	SK50-SKA16-195	P2802845	2.75 - 16.0	195	40	40	52	SKC16	-
	SK50-SKA20-105	P2802846	3.5 - 20.0	105	48.5	48.5	59.6	SKC20	-
	SK50-SKA20-135	P2802847	3.5 - 20.0	135	48.5	48.5	59.6	SKC20	-
	SK50-SKA20-165	P2802848	3.5 - 20.0	165	48.5	48.5	59.6	SKC20	-
	SK50-SKA20-195	P2802849	3.5 - 20.0	195	48.5	48.5	59.6	SKC20	-
	SK50-SKA25-105	P2802850	16.0 - 25.4	105	55	55	63.4	SKC25	-
	SK50-SKA25-135	P2802851	16.0 - 25.4	135	55	55	63.4	SKC25	-
	SK50-SKA25-165	P2802852	16.0 - 25.4	165	55	55	63.4	SKC25	-
	SK50-SKA25-195	P2802853	16.0 - 25.4	195	55	55	63.4	SKC25	-

► CAT(ASME B5.50) taper products are available.

► For applicable Collet, Nut and Spanner, please refer to page D315~D317.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SYNCHRO
TAPPING CHUCK

SYTER

SYNCHRO TAPPING CHUCK (ER TYPE)

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO

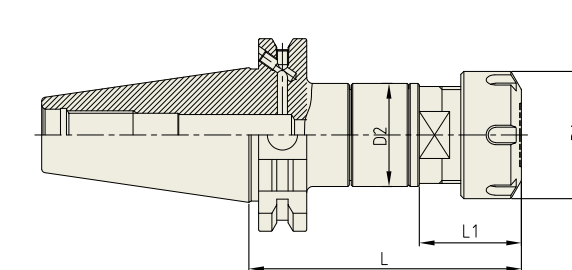

DIN
69871-
SK



AD/B

Unit : mm										
TAPER No.	MODEL No.	EDP No.	TAP SIZE	NUT/ COLLET	D1	D2	L	L1	TENSION/ COMPRESSION	WEIGHT (Kg)
40	SK40AD/B-SYTER12-79	P2773701	M3-M12	ER16	28	34	79	26	±0.2	1.00
	SK40AD/B-SYTER16-85	P2773702	M3-M16	ER20	34	34	85	27	±0.2	1.08
	SK40AD/B-SYTER20-90	P2773703	M3-M20	ER25	42	34	90	34	±0.2	1.08
	SK40AD/B-SYTER27-100	P2773704	M4-M27	ER32	50	45	100	31	±0.2	1.37
	SK40AD/B-SYTER33-120	P2773705	M4-M33	ER40	63	62	120	35	±0.2	2.16
50	SK50AD/B-SYTER12-79	P2773706	M3-M12	ER16	28	34	79	24	±0.2	2.83
	SK50AD/B-SYTER16-85	P2773707	M3-M16	ER20	34	34	85	27	±0.2	2.86
	SK50AD/B-SYTER20-90	P2773708	M3-M20	ER25	42	34	90	34	±0.2	2.87
	SK50AD/B-SYTER27-100	P2773709	M4-M27	ER32	50	45	100	31	±0.2	3.04
	SK50AD/B-SYTER33-105	P2773710	M4-M33	ER40	63	62	105	35	±0.2	3.93

► Feature :

- Compensation for synchronization errors to extend tap life and to improve thread quality.

- To compensate for pitch tolerances of taps.

- For machine with synchronized spindle.

► CAT(ASME B5.50) taper and Inch type products are available.

► ER collet of page D296~D302, and Tap ER collet of page D303~D304 are applicable.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





SYNCHRO
TAPPING CHUCK

SYTC

SYNCHRO TAPPING CHUCK (QUICK CHANGE TYPE)

SYNCHRO GEWINDESCHNEID-SCHNELLWECHSELFUTTER
SYNCHRO TARAUDER À CHANGEMENT RAPIDE
SINCRO MANDRINO PER MASCHIARE
SINCRO PORTAMACHOS DE CAMBIO RAPIDO

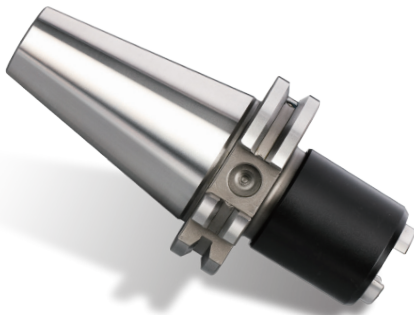

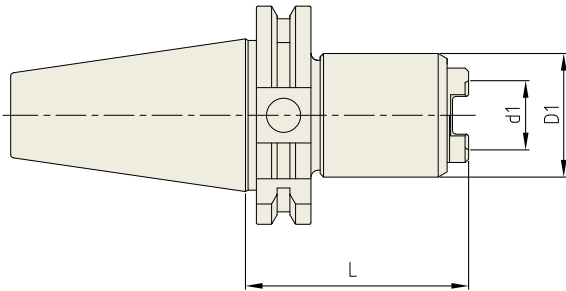

DIN
69871-
SK

AT3

A

Unit : mm								
TAPER No.	MODEL No.	EDP No.	TAP SIZE	TAP ADAPTOR	d1	D1	L	WEIGHT (Kg)
30	SK30-SYTC12-65	P2774207	M3-M12	TCS12	19	36	65	0.50
	SK30-SYTC20-89	P2774208	M6-M24	TCS24	31	50	89	1.00
40	SK40-SYTC12-65	P2774201	M3-M12	TCS12	19	36	65	1.10
	SK40-SYTC20-79	P2774202	M6-M24	TCS24	31	50	79	1.50
	SK40-SYTC33-115	P2774203	M18-M38	TCS38	48	74	115	3.30
50	SK50-SYTC12-65	P2774204	M3-M12	TCS12	19	36	65	3.00
	SK50-SYTC20-79	P2774205	M6-M24	TCS24	31	50	79	3.30
	SK50-SYTC33-115	P2774206	M18-M38	TCS38	48	74	115	5.20

► Feature :

- Compensation for synchronization errors to extend tap life and to improve thread quality.

- To compensate for pitch tolerances of taps.

- For machine with synchronized spindle.

► CAT(ASME B5.50) taper and Inch type products are available.

► For applicable Tap Adaptor, please refer to the page D318~D319.

D54

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ONE STEP
TAPPING CHUCK

OTC

ONE STEP TAPPING CHUCK

GEWINDE-SCHNELLWECHSELFUTTER
MANDRIN DE TARAUDAGE À CHANGEMENT RAPIDE
PORTAMASCHI A CAMBIO RAPIDO
MANDRINO DE CAMBIO RÁPIDO CON ROSCA



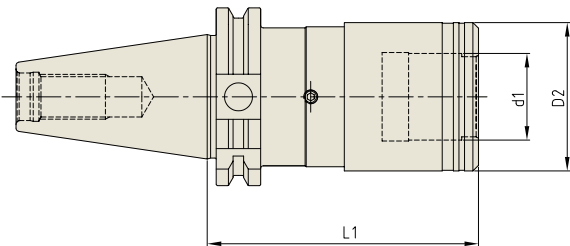

DIN
69871-
SK

AT3

A

Unit : mm								
TAPER No.	MODEL No.	EDP No.	d1	D2	L1	LENGTH COMPENSATION		WEIGHT (Kg)
						Compression	Tension	
40	SK40-OTC-M3-M12-59.5	P2802351	19	36	59	7.5	7.5	1.10
	SK40-OTC-M8-M20-97	P2802352	31	53	97	12.5	12.5	1.50
	SK40-OTC-M14-M36-149	P2802353	48	78	149	20	20	3.30
50	SK50-OTC-M3-M12-59	P2802354	19	36	59	7.5	7.5	3.00
	SK50-OTC-M8-M20-83	P2802355	31	53	83	12.5	12.5	3.30
	SK50-OTC-M14-M36-138	P2802356	48	78	138	20	20	5.20

► CAT(ASME B5.50) taper and Inch type products are available.

► For applicable Tap Adaptor, please refer to the page D318~D319.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D55

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




TAPPING ER
CHUCK

TER

TAPPING ER CHUCK

ER - GEWINDESCHNEIDFUTTER
MANDRIN DE TARAUDAGE PINCE ER
MANDRINI PORTAPINZA ER PER MASCHIATURA
PORTAPINZAS ER PARA MACHOS



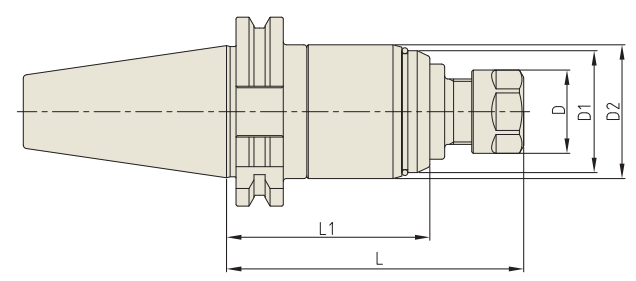

DIN
69871-
SK

AT3

A

Unit : mm									
TAPER No.	MODEL No.	EDP No.	D	D1	D2	L	L1	NUT / COLLET	WEIGHT (Kg)
40	SK40-TER16-100	P2774001	28	41	45	100	68.4	ER16	1.65
	SK40-TER16-150	P2774002	28	41	45	150	118.4	ER16	1.85
	SK40-TER32-130	P2774003	50	58	63	130	92	ER32	2.10
	SK40-TER32-150	P2774004	50	58	63	150	112	ER32	2.30
50	SK50-TER16-115	P2774005	28	41	45	115	79.4	ER16	4.30
	SK50-TER16-150	P2774006	28	41	45	150	114.4	ER16	4.50
	SK50-TER32-120	P2774007	50	58	63	120	83	ER32	4.65
	SK50-TER32-150	P2774008	50	58	63	150	113	ER32	4.85

► CAT(ASME B5.50) taper and Inch type products are available.

► ER collet of page D296~D302, and Tap ER collet of page D303~D304 are applicable.

D56

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




TAPPING
CHUCK

TC

TAPPING CHUCK

GEWINDESCHNEID - SCHNELLWECHSELFUTTER
TARAUDER À CHANGEMENT RAPIDE
MANDRINO PER MASCHIARE
PORTAMACHOS DE CAMBIO RAPIDO



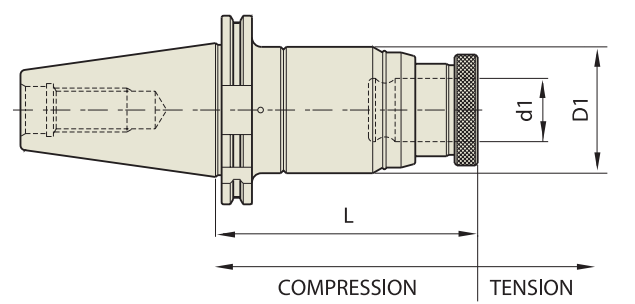

DIN
69871-
SK

AT3

A

Unit : mm										
TAPER No.	MODEL No.	EDP No.	TAP SIZE	TAP ADAPTOR	LENGTH COMPENSATION		d1	D1	L	WEIGHT (Kg)
					Compression	Tension				
40	SK40-TC12-90	P2520001	M3-M12	TCS12	5	15	19	45	90	1.30
	SK40-TC12-130	P2520006	M3-M12	TCS12	5	15	19	45	130	1.80
	SK40-TC24-120	P2520002	M6-M24	TCS24	5	20	31	63	120	2.50
	SK40-TC24-142	P2520007	M6-M24	TCS24	5	20	31	63	142	2.80
50	SK50-TC12-130	P2520003	M3-M12	TCS12	5	15	19	45	130	4.30
	SK50-TC12-175	P2520008	M3-M12	TCS12	5	15	19	45	175	5.50
	SK50-TC24-142	P2520004	M6-M24	TCS24	5	20	31	63	142	5.30
	SK50-TC24-187	P2520009	M6-M24	TCS24	5	20	31	63	187	7.80
	SK50-TC38-175	P2520005	M18-M38	TCS38	10	25	48	98	175	7.50

► CAT(ASME B5.50) taper and Inch type products are available.

► For applicable Tap Adaptor, please refer to page D318~D319.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D57

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

NC DRILL CHUCK

NPU

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

NC DRILL CHUCK

HKD

NC DRILL CHUCK (HEX. KEY TYPE)

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	OAL	GL	BD1	BD2	WEIGHT (Kg)
40	SK40-HKD8-90	P2804002	0.3 - 8.0	158.4	90	37	48	-
	SK40-HKD13-100	P2804001	0.3 - 13.0	168.4	100	50.1	50.1	-
	SK40AD/B-HKD8-110	P2804003	0.3 - 8.0	178.4	110	37	48	-
	SK40AD/B-HKD13-130	P2804004	0.3 - 13.0	198.4	130	50.1	50.1	-

- CAT(ASME B5.50) taper and Inch type products are available.
- Supplied with hex. wrench. (Size HKD 8 : 4mm, HKD 13 : 6mm)

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D61

YG

NC DRILL CHUCK (KEYLESS TYPE)

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC

Unit : mm							
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L (Min.)	L1 (Max.)	WEIGHT (Kg)
40	SK40-NPU8-80	P2802201	0.3 - 8.0	36.5	80	85.7	-
	SK40-NPU8-110	P2802202	0.3 - 8.0	36.5	110	115.7	-
	SK40-NPU8-150	P2802203	0.3 - 8.0	36.5	150	155.7	-
	SK40-NPU13-95	P2802204	1.0 - 13.0	50	95	105	-
	SK40-NPU13-130	P2802205	1.0 - 13.0	50	130	140	-
	SK40-NPU13-150	P2802206	1.0 - 13.0	50	150	160	-
50	SK50-NPU8-80	P2802207	0.3 - 8.0	36.5	80	85.7	-
	SK50-NPU8-110	P2802208	0.3 - 8.0	36.5	110	115.7	-
	SK50-NPU8-150	P2802209	0.3 - 8.0	36.5	150	155.7	-
	SK50-NPU13-95	P2802210	1.0 - 13.0	50	95	105	-
	SK50-NPU13-130	P2802211	1.0 - 13.0	50	130	140	-
	SK50-NPU13-150	P2802212	1.0 - 13.0	50	150	160	-

- CAT(ASME B5.50) taper and Inch type products are available.
- Supplied with hook wrench. (Size NPU 8 : 8S, NPU 13 : 13S)

D60

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

YG

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




BLANK
BAR

BL

BLANK BAR

BOHRSTANGENROHLING
EBAUCHE DE BARRES D ALÉSAGE
BARRA ALESATRICE GREZZA
PIEZA EN BRUTO PARA BARRAS DE MANDRINAR

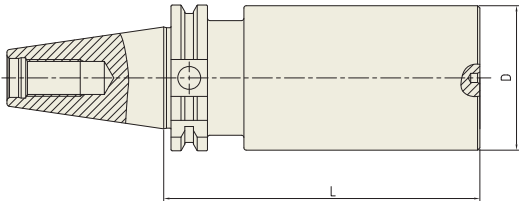

DIN
69871-
SK

AT3

A

TAPER No.	MODEL No.	EDP No.	D	L	WEIGHT(Kg)
40	SK40A-BL63-250	P2779196	63	250	6.18
50	SK50A-BL97-315	P2779197	97	315	18.67

Unit : mm

► CAT(ASME B5.50) taper and Inch type products are available.




TEST
BAR

TB

TEST BAR

KONTROLLDORN
MANDRIN DE CONTRÔLE
MANDRINO DI CONTROLLO
MANDRIL DE CONTROL



DIN
69871-
SK

AT3

≤3μm

A

TAPER No.	MODEL No.	EDP No.	D	L	WEIGHT(Kg)
40	SK40A-TB40-300	P2802301	40	300	3.45
50	SK50A-TB50-300	P2803302	50	300	6.44

Unit : mm

► CAT(ASME B5.50) taper and Inch type products are available.

YG-1 TOOLING SYSTEM

CBT
(BT DUAL CONTACT)



HYDRAULIC CHUCK

SHRINK FIT HOLDER

ER COLLET CHUCK

END MILL HOLDER (SIDE LOCK ARBOR)

SHELL MILL ARBOR

COMBI-SHELL MILL ARBOR

POWER MILLING CHUCK

SK SLIM CHUCK

TAPPING ER CHUCK

FACE MILL ARBOR

NC DRILL CHUCK

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HCR

HYDRAULIC CHUCK (RADIAL TOOL LENGTH PRE-SETTING TYPE)

HYDRAULIK SPANNFUTTER (RADIALE WERKZEUGLÄGEN VOREINSTELLUNG)
MANDRIN HYDRAULIQUE (BANC DE PRÉ-RÉGLAGE RADIAL)
MANDRINI IDRAULICI (UTENSILI RADIALI PER AZZERAMENTO)
PORTAHERRAMIENTAS HIDRAULICO (AJUSTE DE LONGITUD TIPO PRE-SETTING)



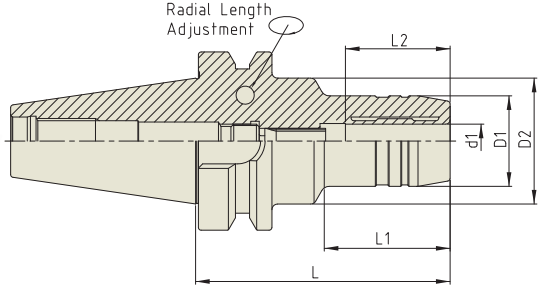

CBT



2.5G







TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
30	CBT30-HCR12-85	P2770551	12	32	44.5	85	40	37	0.90
	CBT30-HCR20-85	P2770552	20	44	44	85	-	42	1.00
40	CBT40-HCR12-90	P2770553	12	32	44.5	90	42.5	37	1.50
	CBT40-HCR20-90	P2770554	20	42	44.5	90	47.5	42	1.60
	CBT40-HCR32-105	P2770555	32	60	60	105	-	55	2.20
50	CBT50-HCR12-95	P2770556	12	32	44.5	95	34	37	3.90
	CBT50-HCR20-100	P2770557	20	42	44.5	100	44	42	4.00
	CBT50-HCR32-115	P2770558	32	60	60	115	-	55	4.10

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D64

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



HYDRAULIC
CHUCK

HCP

HYDRAULIC CHUCK (Power E Hydro)

HYDRAULIK SPANNFUTTER (POWER E HYDRO)
MANDRIN HYDRAULIQUE (POWER E HYDRO)
MANDRINI IDRAULICI (POWER E HYDRO)
PORTAHERRAMIENTAS HIDRAULICO (POWER E HYDRO)



FIG.1


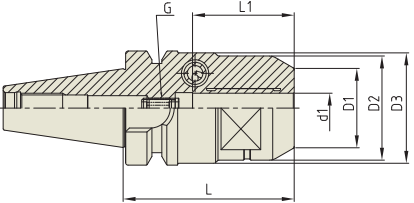


FIG.2



CBT

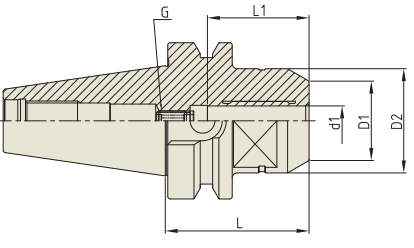

2.5G







TAPER No.	MODEL No.	EDP No.	d1	D1	D2	D3	L	L1	G	FIG.	WEIGHT (Kg)
30	CBT30-HC12P-69	P2776606P	12	32	42	44.5	69	41	M8x1.0	1	0.80
	CBT30-HC20P-90	P2776607P	20	38	42	44.5	90	48	M8x1.0	1	0.90
40	CBT40-HC12P-58	P2776608P	12	32	42	-	58	41	M8x1.0	2	1.10
	CBT40-HC20P-72.5	P2776609P	20	38	49.25	-	72.5	48	M8x1.0	2	1.40

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D65

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MT/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS



HYDRAULIC CHUCK

HMC

HYDRAULIC CHUCK (SLIM)

HYDRAULIK SPANNFUTTER FÜR DEN FORMENBAU

MANDRIN HYDRAULIQUE POUR MOULISTE

MANDRINI IDRAULICI PER STAMPAGGIO

PORTAHERRAMIENTAS HIDRAULICO PARA MOLDES



FIG.1


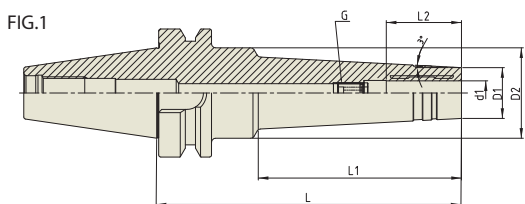


FIG.2

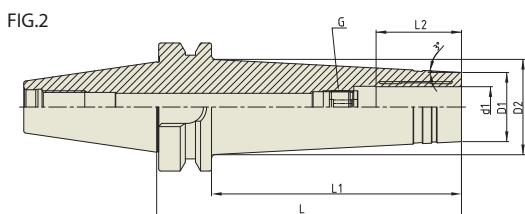

CBT

AT3

2.5G

25,000 RPM

≤3μm (at 3D)

AD

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	FIG.	WEIGHT (Kg)
40	CBT40-HMC6-120	P2770921	6	20	44.5	120	70	27	M5×0.8	1	1.40
	CBT40-HMC6-150	P2770922	6	20	44.5	150	100	27	M5×0.8	1	1.65
	CBT40-HMC8-120	P2770923	8	22	44.5	120	70	27	M6×1.0	1	1.40
	CBT40-HMC8-150	P2770924	8	22	44.5	150	100	27	M6×1.0	1	1.65
	CBT40-HMC10-120	P2770925	10	24	44.5	120	70	32	M8×1.0	1	1.40
	CBT40-HMC10-150	P2770926	10	24	44.5	150	100	32	M8×1.0	1	1.65
	CBT40-HMC12-120	P2770927	12	25	44.5	120	70	37	M10×1.0	1	1.40
	CBT40-HMC12-150	P2770928	12	25	44.5	150	100	37	M10×1.0	1	1.65
	CBT40-HMC14-120	P2770939	14	27	44.5	120	70	37	M10×1.0	1	1.50
	CBT40-HMC14-150	P2770940	14	27	44.5	150	100	37	M10×1.0	1	1.65
	CBT40-HMC16-120	P2770929	16	32	44.5	120	70	42	M12×1.0	1	1.45
	CBT40-HMC16-150	P2770930	16	32	44.5	150	100	42	M12×1.0	1	1.70
	CBT40-HMC20-120	P2770931	20	34	43.8	120	93	42	M16×1.0	2	1.50
	CBT40-HMC20-150	P2770932	20	34	46.9	150	123	42	M16×1.0	2	1.80
50	CBT50-HMC6-150	P2770933	6	20	50	150	90	27	M5×0.8	1	4.70
	CBT50-HMC8-150	P2770934	8	22	50	150	90	27	M6×1.0	1	4.70
	CBT50-HMC10-150	P2770935	10	24	50	150	90	32	M8×1.0	1	4.70
	CBT50-HMC12-150	P2770936	12	25	50	150	90	37	M10×1.0	1	4.70
	CBT50-HMC14-150	P2770941	14	27	50	150	100	37	M10×1.0	1	4.80
	CBT50-HMC16-150	P2770937	16	32	50	150	90	42	M12×1.0	1	4.90
	CBT50-HMC20-150	P2770938	20	34	50	150	90	42	M16×1.0	1	5.00

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D68

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MT/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS



SHRINK FIT HOLDER

SFH

SHRINK FIT HOLDER

SCHRUMPFUTTER

MANDRIN DE FRETAGE

MADRINI PER CALLETAMENTO A CALDO

PORTAHERRAMIENTAS DE COMPRESION POR CALOR



FIG.1


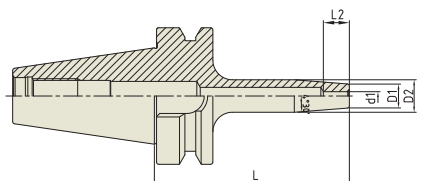


FIG.2

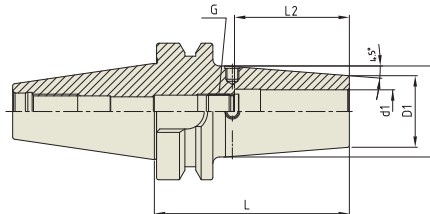

CBT

AT3

2.5G

25,000 RPM

≤3μm (1D)

AD

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)	
30	CBT30-SFH3-60	P2771505	3	11	15	60	10	-	1	0.40	
	CBT30-SFH4-60	P2771506	4	11	15	60	12	-	1	0.40	
	CBT30-SFH5-60	P2771507	5	11	15	60	15	-	1	0.40	
	CBT30-SFH6-60	P2771508	6	21	27	60	36	M5×0.8	2	0.40	
	CBT30-SFH8-60	P2771509	8	21	27	60	36	M6×1.0	2	0.40	
	CBT30-SFH10-80	P2771510	10	24	32	80	41	M8×1.0	2	0.40	
	CBT30-SFH12-80	P2771511	12	24	32	80	48	M10×1.0	2	0.42	
	CBT30-SFH14-80	P2771512	14	27	34	80	48	M10×1.0	2	0.42	
	CBT30-SFH16-80	P2771513	16	27	34	80	51	M12×1.0	2	0.42	
	CBT30-SFH18-80	P2771514	18	27	34	80	51	M12×1.0	2	0.42	
	CBT30-SFH20-90	P2771515	20	33	42	90	53	M16×1.0	2	0.44	
40	CBT40-SFH3-90	P2771516	3	11	15	90	10	-	1	1.00	
	CBT40-SFH4-90	P2771517	4	11	15	90	12	-	1	1.00	
	CBT40-SFH5-90	P2771518	5	11	15	90	23	-	1	1.00	
	CBT40-SFH6-90	P2771519	6	21	27	90	36	M5×0.8	2	1.10	
	CBT40-SFH6-130	P2771564	6	21	27	130	36	M5×0.8	2	-	
	CBT40-SFH6-160	P2771520	6	21	27	160	36	M5×0.8	2	1.15	
	CBT40-SFH8-90	P2771501	8	21	27	90	36	M6×1.0	2	1.11	
	CBT40-SFH8-130	P2771565	8	21	27	130	36	M6×1.0	2	-	
	CBT40-SFH8-160	P2771521	8	21	27	160	36	M6×1.0	2	1.15	
	CBT40-SFH10-90	P2771502	10	24	32	90	41	M8×1.0	2	1.10	
	CBT40-SFH10-130	P2771566	10	24	32	130	41	M8×1.0	2	-	
	CBT40-SFH10-160	P2771522	10	24	32	160	41	M8×1.0	2	1.15	
	CBT40-SFH12-90	P2771503	12	24	32	90	47	M10×1.0	2	1.10	
	CBT40-SFH12-130	P2771567	12	24	32	130	47	M10×1.0	2	-	
	CBT40-SFH12-160	P2771523	12	24	32	160	47	M10×1.0	2	1.15	
	CBT40-SFH14-90	P2771524	14	27	34	90	47	M10×1.0	2	1.20	
	CBT40-SFH14-130	P2771568	14	27	34	130	47	M10×1.0	2	-	
	CBT40-SFH14-160	P2771525	14	27	34	160	47	M10×1.0	2	1.50	

► Inch type products are available.

► Supplied without balancing screws.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► NEXT PAGE

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D69

**SFH**

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR



FIG.1



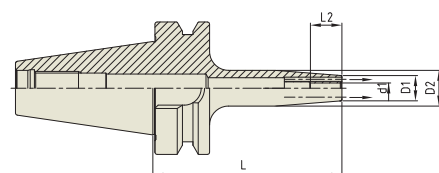


FIG.2

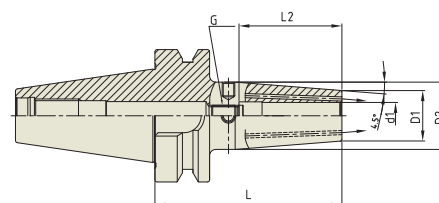

										Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
40	CBT40-SFH3C-90* ¹	P2862160C	3	12	17	90	10	-	1	-
	CBT40-SFH4C-90* ¹	P2862161C	4	12	17	90	12	-	1	-
	CBT40-SFH5C-90* ¹	P2862162C	5	12	17	90	15	-	1	-
	CBT40-SFH6C-90	P2862049C	6	21	27	90	36	M5x0.8	2	1.10
	CBT40-SFH6C-130	P2862184C	6	21	27	130	36	M5x0.8	2	-
	CBT40-SFH6C-160	P2862050C	6	21	27	160	36	M5x0.8	2	1.15
	CBT40-SFH8C-90	P2862051C	8	21	27	90	36	M6x1.0	2	1.11
	CBT40-SFH8C-130	P2862185C	8	21	27	130	36	M6x1.0	2	-
	CBT40-SFH8C-160	P2862052C	8	21	27	160	36	M6x1.0	2	1.15
	CBT40-SFH10C-90	P2862053C	10	24	32	90	41	M8x1.0	2	1.10
	CBT40-SFH10C-130	P2862186C	10	24	32	130	41	M8x1.0	2	-
	CBT40-SFH10C-160	P2862054C	10	24	32	160	41	M8x1.0	2	1.15
	CBT40-SFH12C-90	P2862055C	12	24	32	90	47	M10x1.0	2	1.10
	CBT40-SFH12C-130	P2862187C	12	24	32	130	47	M10x1.0	2	-
	CBT40-SFH12C-160	P2862056C	12	24	32	160	47	M10x1.0	2	1.15
	CBT40-SFH14C-90	P2862057C	14	27	34	90	47	M10x1.0	2	1.20
	CBT40-SFH14C-130	P2862188C	14	27	34	130	47	M10x1.0	2	-
	CBT40-SFH14C-160	P2862058C	14	27	34	160	47	M10x1.0	2	1.50
	CBT40-SFH16C-90	P2862059C	16	27	34	90	50	M12x1.0	2	1.20
	CBT40-SFH16C-130	P2862189C	16	27	34	130	50	M12x1.0	2	-
CBT40-SFH16C-160	P2862060C	16	27	34	160	50	M12x1.0	2	1.50	
CBT40-SFH18C-90	P2862061C	18	33	42	90	50	M12x1.0	2	1.30	
CBT40-SFH18C-130	P2862190C	18	33	42	130	50	M12x1.0	2	-	
CBT40-SFH18C-160	P2862062C	18	33	42	160	50	M12x1.0	2	1.60	

- ▶ Inch type products are available.
- ▶ Supplied without balancing screws.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
- ▶ With two coolant channel bores.
- ▶ Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)
- ▶ ^{*1} Resealable type is not available.



▶ NEXT PAGE

**SFH**

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR



FIG.1



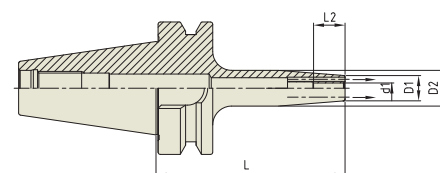


FIG.2

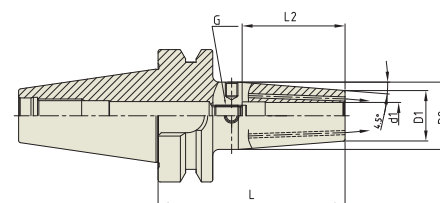

										Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
40	CBT40-SFH20C-90	P2862063C	20	33	42	90	52	M16x1.0	2	1.40
	CBT40-SFH20C-130	P2862191C	20	33	42	130	52	M16x1.0	2	-
	CBT40-SFH20C-160	P2862064C	20	33	42	160	52	M16x1.0	2	1.70
	CBT40-SFH25C-100	P2862065C	25	44	53	100	58	M16x1.0	2	1.70
	CBT40-SFH25C-130	P2862192C	25	44	53	130	58	M16x1.0	2	-
	CBT40-SFH25C-160	P2862066C	25	44	53	160	58	M16x1.0	2	2.00
50	CBT50-SFH3C-100* ¹	P2862172C	3	12	17	100	10	-	1	-
	CBT50-SFH4C-100* ¹	P2862173C	4	12	17	100	12	-	1	-
	CBT50-SFH5C-100* ¹	P2862174C	5	12	17	100	15	-	1	-
	CBT50-SFH6C-100	P2862067C	6	21	27	100	36	M5x0.8	2	1.50
	CBT50-SFH6C-130	P2862193C	6	21	27	130	36	M5x0.8	2	-
	CBT50-SFH6C-160	P2862068C	6	21	27	160	36	M5x0.8	2	2.00
	CBT50-SFH6C-200	P2862194C	6	21	27	200	36	M5x0.8	2	-
	CBT50-SFH8C-100	P2862069C	8	21	27	100	36	M6x1.0	2	1.50
	CBT50-SFH8C-130	P2862195C	8	21	27	130	36	M6x1.0	2	-
	CBT50-SFH8C-160	P2862070C	8	21	27	160	36	M6x1.0	2	2.00
	CBT50-SFH8C-200	P2862196C	8	21	27	200	36	M6x1.0	2	-
	CBT50-SFH10C-100	P2862071C	10	24	32	100	42	M8x1.0	2	1.10
	CBT50-SFH10C-130	P2862197C	10	24	32	130	42	M8x1.0	2	-
	CBT50-SFH10C-160	P2862072C	10	24	32	160	42	M8x1.0	2	1.15
	CBT50-SFH10C-200	P2862198C	10	24	32	200	42	M8x1.0	2	-
	CBT50-SFH12C-100	P2862073C	12	24	32	100	47	M10x1.0	2	1.60
	CBT50-SFH12C-130	P2862199C	12	24	32	130	47	M10x1.0	2	-
	CBT50-SFH12C-160	P2862074C	12	24	32	160	47	M10x1.0	2	2.10

- ▶ Inch type products are available.
- ▶ Supplied without balancing screws.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
- ▶ With two coolant channel bores.
- ▶ Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)
- ▶ ^{*1} Resealable type is not available.



▶ NEXT PAGE

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

SHRINK FIT
HOLDER

SFH

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR



FIG.1

FIG.2

CBT

AT3

2.5G

25,000 RPM

LD ≤ 3μm

AD+C

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
50	CBT50-SFH12C-200	P2862200C	12	24	32	200	47	M10x1.0	2	-
	CBT50-SFH14C-100	P2862075C	14	27	34	100	47	M10x1.0	2	1.60
	CBT50-SFH14C-130	P2862201C	14	27	34	130	47	M10x1.0	2	-
	CBT50-SFH14C-160	P2862076C	14	27	34	160	47	M10x1.0	2	2.10
	CBT50-SFH14C-200	P2862202C	14	27	34	200	47	M10x1.0	2	-
	CBT50-SFH16C-100	P2862077C	16	27	34	100	50	M12x1.0	2	1.60
	CBT50-SFH16C-130	P2862203C	16	27	34	130	50	M12x1.0	2	-
	CBT50-SFH16C-160	P2862078C	16	27	34	160	50	M12x1.0	2	2.10
	CBT50-SFH16C-200	P2862204C	16	27	34	200	50	M12x1.0	2	-
	CBT50-SFH18C-100	P2862079C	18	33	42	100	50	M12x1.0	2	1.60
	CBT50-SFH18C-130	P2862205C	18	33	42	130	50	M12x1.0	2	-
	CBT50-SFH18C-160	P2862080C	18	33	42	160	50	M12x1.0	2	2.00
	CBT50-SFH18C-200	P2862206C	18	33	42	200	50	M12x1.0	2	-
	CBT50-SFH20C-100	P2862081C	20	33	42	100	52	M16x1.0	2	1.80
	CBT50-SFH20C-130	P2862207C	20	33	42	130	52	M16x1.0	2	-
	CBT50-SFH20C-160	P2862082C	20	33	42	160	52	M16x1.0	2	2.20
	CBT50-SFH20C-200	P2862208C	20	33	42	200	52	M16x1.0	2	-
	CBT50-SFH25C-100	P2862083C	25	44	53	100	58	M16x1.0	2	2.00
	CBT50-SFH25C-130	P2862209C	25	44	53	130	58	M16x1.0	2	-
	CBT50-SFH25C-160	P2862084C	25	44	53	160	58	M16x1.0	2	2.40
CBT50-SFH25C-200	P2862210C	25	44	53	200	58	M16x1.0	2	-	

Unit : mm

Weight (Kg)


▶ Inch type products are available.

▶ Supplied without balancing screws.

▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

▶ With two coolant channel bores.

▶ Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)



D74

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER



CBT

AT3

2.5G

25,000 RPM

AD

TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
30	CBT30-ER11-70	P2776802	0.5 - 7.0	70	19	M6	45	ER11	0.50
	CBT30-ER11-100	P2776803	0.5 - 7.0	100	19	M6	45	ER11	0.50
	CBT30-ER16-70	P2776804	0.5 - 10.0	70	28	M10	45	ER16	1.00
	CBT30-ER16-100	P2776805	0.5 - 10.0	100	28	M10	45	ER16	1.10
	CBT30-ER20-80	P2776806	0.5 - 13.0	80	34	M12	50	ER20	1.20
	CBT30-ER20-100	P2776807	0.5 - 13.0	100	34	M12	50	ER20	1.30
	CBT30-ER25-70	P2776808	1.0 - 16.0	70	42	M12	65	ER25	1.20
	CBT30-ER25-100	P2776809	1.0 - 16.0	100	42	M12	65	ER25	1.30
	CBT30-ER32-60	P2776801	1.0 - 20.0	60	50	M12	65	ER32	1.40
	CBT30-ER32-90	P2776810	1.0 - 20.0	90	50	M12	65	ER32	1.90
40	CBT40-ER11-75	P2772004	0.5 - 7.0	75	19	M6	45	ER11	1.00
	CBT40-ER11-100	P2772005	0.5 - 7.0	100	19	M6	45	ER11	1.10
	CBT40-ER16-75	P2772006	0.5 - 10.0	75	28	M10	45	ER16	1.10
	CBT40-ER16-100	P2772001	0.5 - 10.0	100	28	M10	45	ER16	1.20
	CBT40-ER16-120	P2772007	0.5 - 10.0	120	28	M12	45	ER16	1.40
	CBT40-ER20-75	P2772008	0.5 - 13.0	75	34	M12	50	ER20	1.40
	CBT40-ER20-100	P2772009	0.5 - 13.0	100	34	M12	50	ER20	1.80
	CBT40-ER20-135	P2772010	0.5 - 13.0	135	34	M12	50	ER20	2.20
	CBT40-ER25-75	P2772011	1.0 - 16.0	75	42	M12	65	ER25	1.40
	CBT40-ER25-100	P2772002	1.0 - 16.0	100	42	M12	65	ER25	1.80
	CBT40-ER25-135	P2772012	1.0 - 16.0	135	42	M12	65	ER25	2.20
	CBT40-ER25-150	P2772013	1.0 - 16.0	150	42	M12	65	ER25	2.40
	CBT40-ER32-60	P2772014	1.0 - 20.0	60	50	M12	65	ER32	1.80
	CBT40-ER32-100	P2772003	1.0 - 20.0	100	50	M12	65	ER32	2.20
	CBT40-ER32-120	P2772015	1.0 - 20.0	120	50	M12	65	ER32	2.40
	CBT40-ER32-150	P2772016	1.0 - 20.0	150	50	M12	65	ER32	2.60
	CBT40-ER40-80	P2772017	2.0 - 30.0	80	63	M12	75	ER40	1.50

Unit : mm

Weight (Kg)

▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

▶ For applicable ER collet, please refer to page D296~D304.

▶ For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

▶ NEXT PAGE

D75

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MT/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

YG

END MILL HOLDER

EMH

END MILL HOLDER

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL

FIG.1

FIG.2

CBT

AT3

2.5G

25,000 RPM

AD

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
30	CBT30-EMH6-50	P2786001	6	25	50	37	18	-	M6	1	-
	CBT30-EMH8-50	P2786002	8	28	50	37	18	-	M8	1	-
	CBT30-EMH10-50	P2786003	10	35	50	41	20	-	M10	1	-
	CBT30-EMH12-55	P2786004	12	42	55	46	22.5	-	M12	1	-
	CBT30-EMH16-63	P2786005	16	48	63	54	24	-	M14	1	-
	CBT30-EMH20-70	P2786006	20	52	70	53	25	-	M16	1	-
40	CBT40-EMH6-50	P2786007	6	25	50	35	18	-	M6	1	-
	CBT40-EMH6-100	P2786008	6	25	100	35	18	-	M6	1	-
	CBT40-EMH8-50	P2786009	8	28	50	35	18	-	M8	1	-
	CBT40-EMH8-100	P2786010	8	28	100	35	18	-	M8	1	-
	CBT40-EMH10-63	P2786011	10	35	63	36	20	-	M10	1	-
	CBT40-EMH10-100	P2786012	10	35	100	36	20	-	M10	1	-
	CBT40-EMH12-63	P2786013	12	42	63	36	22.5	-	M12	1	-
	CBT40-EMH12-100	P2786014	12	42	100	36	22.5	-	M12	1	-
	CBT40-EMH16-63	P2786015	16	48	63	54	24	-	M14	1	-
	CBT40-EMH16-100	P2786016	16	48	100	54	24	-	M14	1	-
	CBT40-EMH20-63	P2786017	20	52	63	55	25	-	M16	1	-
	CBT40-EMH20-100	P2786018	20	52	100	55	25	-	M16	1	-
	CBT40-EMH25-90	P2786019	25	65	90	60	24	25	M18	2	-
	50	CBT50-EMH6-63	P2786020	6	25	63	35	18	-	M6	1
CBT50-EMH8-63		P2786021	8	28	63	35	18	-	M8	1	-
CBT50-EMH10-70		P2786022	10	35	70	36	20	-	M10	1	-
CBT50-EMH12-80		P2786023	12	42	80	46	22.5	-	M12	1	-
CBT50-EMH16-80		P2786024	16	48	80	49	24	-	M14	1	-
CBT50-EMH20-80		P2786025	20	52	80	52	25	-	M16	1	-
CBT50-EMH25-100	P2786026	25	65	100	60	24	25	M18	2	-	

► Inch type products are available.

► Standard End Mill Holder is for a cutting tool with weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D78

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MT/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

YG

SIDE LOCK ARBOR

SLA

SIDE LOCK ARBOR

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL

FIG.1

FIG.2

CBT

AT3

AD

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	G	FIG.	WEIGHT (Kg)
30	CBT30-SLA6-60	P2772918	6	25	60	35	18	-	M5	M5	1	0.70
	CBT30-SLA8-60	P2772919	8	28	60	35	18	-	M6	M6	1	0.80
	CBT30-SLA10-60	P2772920	10	35	60	50	14	13	M8	M8	2	0.90
	CBT30-SLA12-60	P2772921	12	40	60	50	14	13	M10	M10	2	1.10
	CBT30-SLA14-60	P2772922	14	40	60	50	14	13	M10	M10	2	1.20
	CBT30-SLA16-75	P2772923	16	40	75	70	25	20	M12	M12	2	1.30
	CBT30-SLA20-75	P2772924	20	50	75	70	25	20	M12	M12	2	1.40
	CBT30-SLA25-75	P2772925	25	50	75	70	25	20	M14	M12	2	1.50
	CBT30-SLA32-105	P2772926	32	60	105	80	25	25	M16	M12	2	1.60
	CBT40-SLA6-60	P2772927	6	25	60	35	18	-	M5	M5	1	1.10
40	CBT40-SLA8-60	P2772928	8	28	60	35	18	-	M6	M6	1	1.10
	CBT40-SLA10-60	P2772929	10	35	60	50	14	13	M8	M8	2	1.20
	CBT40-SLA12-60	P2772930	12	40	60	50	14	13	M10	M10	2	1.40
	CBT40-SLA16-90	P2772931	16	40	90	70	25	20	M12	M10	2	1.50
	CBT40-SLA20-90	P2772901	20	50	90	70	25	20	M12	M12	2	1.80
	CBT40-SLA25-90	P2772902	25	50	90	70	25	20	M14	M12	2	1.70
	CBT40-SLA32-90	P2772903	32	60	90	80	25	25	M16	M12	2	1.90
	CBT40-SLA40-90	P2772904	40	63	90	80	25	25	M16	M12	2	1.80
	CBT40-SLA42-90	P2772905	42	63	90	80	25	25	M16	M12	2	1.80
	50	CBT50-SLA6-90	P2772906	6	25	90	40	18	-	M5	M5	1
CBT50-SLA8-90		P2772907	8	28	90	40	18	-	M6	M6	1	3.90
CBT50-SLA10-90		P2772908	10	35	90	50	15	15	M8	M8	2	4.10
CBT50-SLA12-90		P2772909	12	40	90	55	15	15	M10	M10	2	4.30
CBT50-SLA14-90		P2772910	14	40	90	55	15	15	M10	M10	2	4.30
CBT50-SLA16-105		P2772911	16	40	105	70	25	20	M12	M12	2	4.40
CBT50-SLA20-105		P2772912	20	50	105	70	25	20	M12	M12	2	4.80
CBT50-SLA25-105		P2772913	25	50	105	70	25	20	M14	M12	2	4.70
CBT50-SLA32-105		P2772914	32	60	105	80	25	25	M16	M12	2	4.00
CBT50-SLA40-105		P2772915	40	70	105	80	25	25	M16	M12	2	4.50
CBT50-SLA42-105	P2772916	42	70	105	80	25	25	M16	M12	2	4.70	
CBT50-SLA50.8-121	P2772917	50.8	95	121	87	33.9	35.8	M20	-	2	5.00	

► Inch type products are available.

► Standard design of Side Lock Arbor is for cutting tools with straight shank having flat face.

► Side Lock Arbor is Non-Balancing.

D79

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



SHELL MILL
ARBOR

SMA


SHELL MILL ARBOR

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG

MANDRIN PORTE-FRAISES

MANDRINO CON TRASCINAMENTO FISSO

PORTA FRESAS

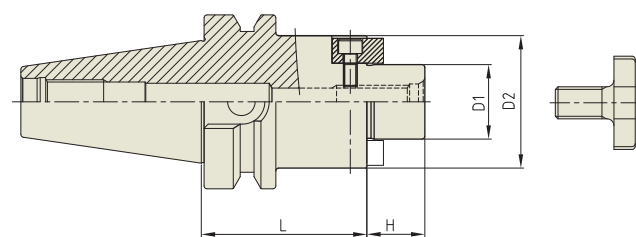

CBT

AT3

2.5G

25,000
RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
30	CBT30-SMA16-50	P2778701	16	32	50	17	M8x16L	0.58
	CBT30-SMA22-50	P2778702	22	40	50	19	M10x18L	0.70
	CBT30-SMA27-50	P2778703	27	48	50	21	M12x22L	0.85
40	CBT40-SMA16-60	P2778704	16	32	60	17	M8x16L	1.17
	CBT40-SMA16-120	P2778715	16	32	120	17	M8x16L	1.50
	CBT40-SMA22-60	P2778705	22	40	60	19	M10x18L	1.31
	CBT40-SMA22-120	P2778716	22	40	120	19	M10x18L	1.85
	CBT40-SMA27-60	P2778706	27	48	60	21	M12x22L	1.48
	CBT40-SMA27-120	P2778717	27	48	120	21	M12x22L	2.27
	CBT40-SMA32-60	P2778707	32	58	60	24	M16x26L	1.72
	CBT40-SMA32-120	P2778718	32	58	120	24	M16x26L	2.90
50	CBT40-SMA40-60	P2778708	40	70	60	27	M20x30L	2.00
	CBT50-SMA16-75	P2778709	16	32	75	17	M8x16L	3.75
	CBT50-SMA16-120	P2778719	16	32	120	17	M8x16L	4.03
	CBT50-SMA22-75	P2778710	22	40	75	19	M10x18L	3.90
	CBT50-SMA22-120	P2778720	22	40	120	19	M10x18L	4.25
	CBT50-SMA27-75	P2778711	27	48	75	21	M12x22L	4.09
	CBT50-SMA27-120	P2778721	27	48	120	21	M12x22L	4.56
	CBT50-SMA32-75	P2778712	32	58	75	24	M16x26L	4.35
	CBT50-SMA32-120	P2778722	32	58	120	24	M16x26L	5.22
	CBT50-SMA40-75	P2778713	40	70	75	27	M20x30L	4.77
	CBT50-SMA40-120	P2778723	40	70	120	27	M20x30L	6.04
	CBT50-SMA50-75	P2778714	50	90	75	30	M24x36L	5.63

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For parts, please refer to page D311.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



SHELL MILL
ARBOR

SMA


SHELL MILL ARBOR (COOLANT CHANNEL & SMALL FACE)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG

MANDRIN PORTE-FRAISES

MANDRINO CON TRASCINAMENTO FISSO

PORTA FRESAS

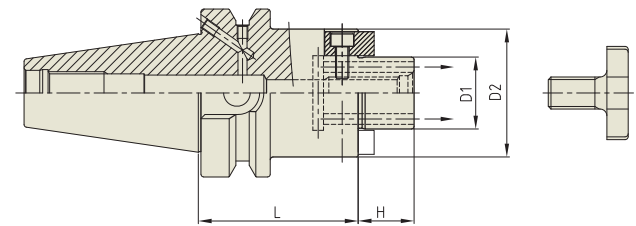

CBT

AT3

2.5G

25,000
RPM

AD/B+C

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
40	CBT40AD/B-SMA16C-60	P2801047C	16	32	60	17	M8x16L	1.20
	CBT40AD/B-SMA16C-120	P2801058C	16	32	120	17	M8x16L	1.20
	CBT40AD/B-SMA22C-60	P2801048C	22	40	60	19	M10x18L	1.27
	CBT40AD/B-SMA22C-120	P2801059C	22	40	120	19	M10x18L	1.84
	CBT40AD/B-SMA27C-60	P2801049C	27	48	60	21	M12x22L	1.44
	CBT40AD/B-SMA27C-120	P2801060C	27	48	120	21	M12x22L	2.26
50	CBT50AD/B-SMA16C-60	P2803407C	16	32	60	17	M8x16L	3.00
	CBT50AD/B-SMA16C-120	P2801062C	16	32	120	17	M8x16L	3.30
	CBT50AD/B-SMA22C-75	P2801053C	22	40	75	19	M10x18L	3.83
	CBT50AD/B-SMA22C-120	P2801063C	22	40	120	19	M10x18L	4.24
	CBT50AD/B-SMA27C-75	P2801054C	27	48	75	21	M12x22L	4.03
	CBT50AD/B-SMA27C-120	P2801064C	27	48	120	21	M12x22L	4.64
	CBT50AD/B-SMA32C-75	P2801055C	32	58	75	24	M16x26L	4.31
	CBT50AD/B-SMA32C-120	P2801065C	32	58	120	24	M16x26L	5.19
	CBT50AD/B-SMA40C-75	P2801056C	40	70	75	27	M20x30L	4.75
	CBT50AD/B-SMA40C-120	P2801066C	40	70	120	27	M20x30L	6.02

► Inch type products are available.

► With "Coolant Through" by coolant channels.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For parts, please refer to page D311.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




SHELL MILL ARBOR

SMA

SHELL MILL ARBOR (COOLANT CHANNEL & LARGE FACE)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS



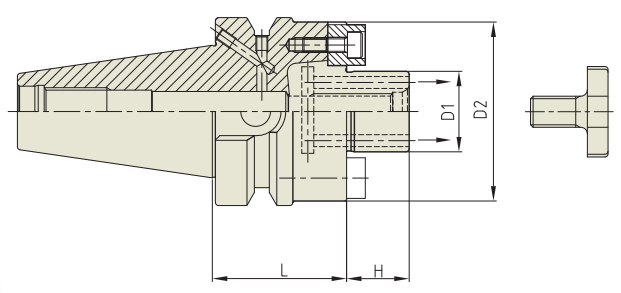

CBT

AT3

2.5G

25,000 RPM

AD+C or AD/B+C

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
30	CBT30-SMA16CE-40	P2803501CE	16	38	40	17	M8x16L	0.55
	CBT30-SMA22CE-40	P2803502CE	22	48	40	19	M10x18L	0.69
	CBT30-SMA27CE-40	P2803503CE	27	60	40	21	M12x22L	0.85
	CBT30-SMA32CE-45	P2803504CE	32	78	45	24	M16x26L	1.32
40	CBT40AD/B-SMA16CE-50	P2803505CE	16	38	50	17	M10x18L	1.14
	CBT40AD/B-SMA22CE-45	P2803506CE	22	48	45	19	M10x18L	1.22
	CBT40AD/B-SMA27CE-45	P2803507CE	27	60	45	21	M12x22L	1.39
	CBT40AD/B-SMA32CE-50	P2803508CE	32	78	50	24	M16x26L	1.80
	CBT40AD/B-SMA40CE-50	P2803509CE	40	89	50	27	M20x30L	2.05
50	CBT50AD/B-SMA22CE-55	P2803510CE	22	48	55	19	M10x18L	3.72
	CBT50AD/B-SMA27CE-55	P2803511CE	27	60	55	21	M12x22L	3.89
	CBT50AD/B-SMA32CE-55	P2803512CE	32	78	55	24	M16x26L	4.21
	CBT50AD/B-SMA40CE-55	P2803513CE	40	89	55	27	M20x30L	4.52

► Inch type products are available.

► With "Coolant Through" by coolant channels.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For parts, please refer to page D311.

D82

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




COMBI-SHELL MILL ARBOR

CMA

COMBI-SHELL MILL ARBOR

KOMBI-AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES COMBINÉS
MANDRINO PORTA FRESE
PORTA FRESAS COMBINADO



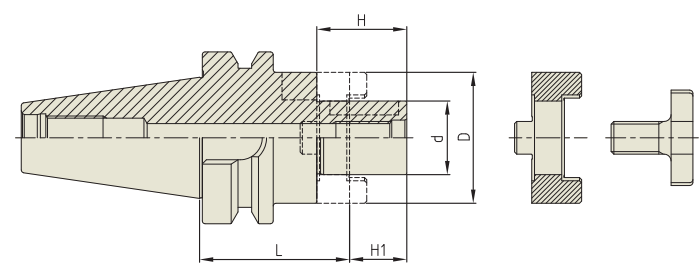

CBT

AT3

2.5G

25,000 RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	d	L	D	H1	H	WEIGHT (Kg)
30	CBT30-CMA16-50	P2775601	16	50	32	17	27	0.61
	CBT30-CMA22-50	P2775602	22	50	40	19	31	0.70
	CBT30-CMA27-55	P2775624	27	55	48	21	33	0.92
40	CBT40-CMA16-55	P2775604	16	55	32	17	27	1.14
	CBT40-CMA16-100	P2775615	16	100	32	17	27	1.41
	CBT40-CMA22-55	P2775605	22	55	40	19	31	1.26
	CBT40-CMA22-100	P2775616	22	100	40	19	31	1.68
	CBT40-CMA27-55	P2775606	27	55	48	21	33	1.42
	CBT40-CMA27-100	P2775617	27	100	48	21	33	2.02
	CBT40-CMA32-60	P2775607	32	60	58	24	38	1.72
	CBT40-CMA32-100	P2775618	32	100	58	24	38	2.51
	CBT40-CMA40-70	P2775625	40	70	70	27	41	2.46
50	CBT50-CMA16-70	P2775609	16	70	32	17	27	3.74
	CBT50-CMA16-100	P2775619	16	100	32	17	27	3.92
	CBT50-CMA22-70	P2775610	22	70	40	19	31	3.86
	CBT50-CMA22-100	P2775620	22	100	40	19	31	4.15
	CBT50-CMA27-70	P2775611	27	70	48	21	33	4.04
	CBT50-CMA27-100	P2775621	27	100	48	21	33	4.45
	CBT50-CMA32-70	P2775612	32	70	58	24	38	4.28
	CBT50-CMA32-100	P2775622	32	100	58	24	38	4.86
	CBT50-CMA40-70	P2775613	40	70	70	27	41	4.62
	CBT50-CMA40-100	P2775623	40	100	70	27	41	5.47
	CBT50-CMA50-70	P2775614	50	70	90	30	46	5.48

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For parts, please refer to page D312.

D83

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS


Y/G

TAPPING ER CHUCK

TER

TAPPING ER CHUCK

ER - GEWINDESCHNEIDFUTTER
MANDRIN DE TARAUDAGE PINCE ER
MANDRINI PORTAPINZA ER PER MASCHIATURA
PORTAPINZAS ER PARA MACHOS

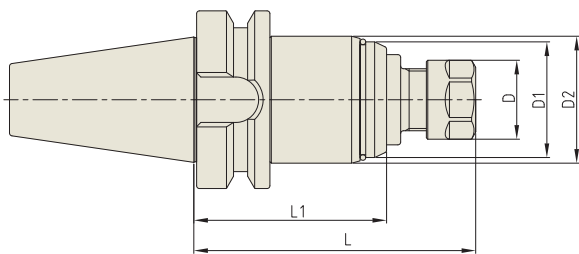

CBT

AT3

A

TAPER No.	MODEL No.	EDP No.	D	D1	D2	L	L1	NUT / COLLET	WEIGHT (Kg)
40	CBT40-TER16-100	P2774151	28	41	45	100	68.4	ER16	1.45
	CBT40-TER16-150	P2774152	28	41	45	150	118.4	ER16	2.00
	CBT40-TER32-110	P2774153	50	58	63	110	72	ER32	2.20
	CBT40-TER32-150	P2774154	50	58	63	150	112	ER32	2.70
50	CBT50-TER16-115	P2774155	28	41	45	115	79.4	ER16	3.95
	CBT50-TER16-150	P2774156	28	41	45	150	114.4	ER16	4.35
	CBT50-TER32-120	P2774157	50	58	63	120	83	ER32	4.70
	CBT50-TER32-150	P2774158	50	58	63	150	113	ER32	5.20

► Inch type products are available.

► ER collet of page D296~D302 and Tap ER collet of page D303~D304 are applicable.

D88

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS


Y/G

FACE MILL ARBOR

FMA

FACE MILL ARBOR

AUFNAHMEORN FÜR MESSERKÖPFE
ARBRE PORTE FRAISE À ALÉSAGE
MANDRINO PORTA FRESE FRONTALE
EJE PARA PLATOS DE PLACAS

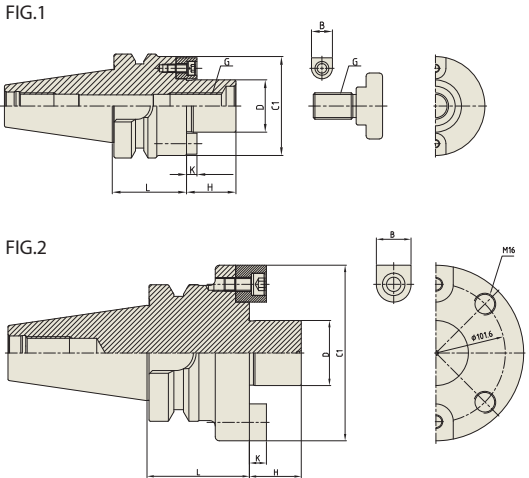

CBT

AT3

2.5G

25,000 RPM

AD

TAPER No.	MODEL No.	EDP No.	D	L	C1	H	B	K	G	FIG.	WEIGHT (Kg)
30	CBT30-FMA25.4-45	P2779201	25.4	45	50	22	9.52	4.8	M12	1	1.10
	CBT30-FMA31.75-45	P2779202	31.75	45	60	30	12.7	6.35	M16	1	1.20
40	CBT40-FMA25.4-45	P2779203	25.4	45	50	22	9.52	4.8	M12	1	1.50
	CBT40-FMA25.4-90	P2779204	25.4	90	50	22	9.52	4.8	M12	1	3.10
	CBT40-FMA31.75-45	P2779205	31.75	45	60	30	12.7	6.35	M16	1	1.90
	CBT40-FMA31.75-75	P2779206	31.75	75	60	30	12.7	6.35	M16	1	2.70
	CBT40-FMA38.1-60	P2779207	38.1	60	80	34	15.87	8.87	M20	1	2.90
	CBT40-FMA38.1-105	P2779213	31.75	105	60	30	12.7	6.35	M16	1	5.80
50	CBT50-FMA25.4-45	P2779208	25.4	45	50	22	9.52	4.8	M12	1	3.70
	CBT50-FMA25.4-90	P2779209	25.4	90	50	22	9.52	4.8	M12	1	4.60
	CBT50-FMA25.4-150	P2779210	25.4	150	50	22	9.52	4.8	M12	1	5.50
	CBT50-FMA31.75-45	P2779211	31.75	45	60	30	12.7	6.35	M16	1	4.50
	CBT50-FMA31.75-75	P2779212	31.75	75	60	30	12.7	6.35	M16	1	5.30
	CBT50-FMA31.75-150	P2779214	31.75	150	60	30	12.7	6.35	M16	1	6.30
	CBT50-FMA38.1-45	P2779215	38.1	45	80	34	15.87	8.87	M20	1	4.30
	CBT50-FMA38.1-75	P2779216	38.1	75	80	34	15.87	8.87	M20	1	5.60
	CBT50-FMA38.1-105	P2779217	38.1	105	80	34	15.87	8.87	M20	1	6.00
	CBT50-FMA38.1-150	P2779218	38.1	150	80	34	15.87	8.87	M20	1	6.50
	CBT50-FMA50.8-45	P2779219	50.8	45	98	36	19.05	11	M24	1	4.90
	CBT50-FMA50.8-75	P2779220	50.8	75	98	36	19.05	11	M24	1	6.80
CBT50-FMA47.625-75	P2779221	47.625	75	128.57	38	25.4	12.5	-	2	7.70	

► Fig. 2 : Without "Coolant Through".

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For parts, please refer to page D313.

D89

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions


Y/G YG-1 CO., LTD.



FMC

FACE MILL ARBOR

AUFNAHMEDORN FÜR MESSERKÖPFE
ARBRE PORTE FRAISE À ALÉSAGE
MANDRINO PORTA FRESE FRONTALE
EJE PARA PLATOS DE PLACAS

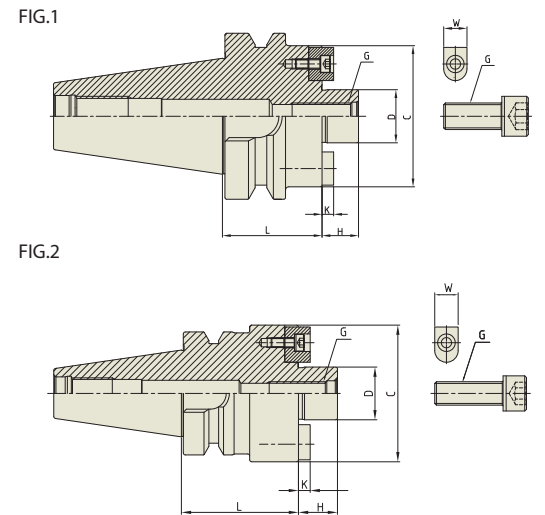

◆ METRIC TYPE

Unit : mm

TAPER No.	MODEL No.	EDP No.	D	L	C	H	W	K	G	FIG.	WEIGHT (Kg)
30	CBT30-FMC22-45	P2776131	22	45	45	18	10	5	M10	1	0.80
40	CBT40-FMC22-45	P2776132	22	45	45	18	10	5	M10	1	1.30
	CBT40-FMC27-60	P2776133	27	60	70	20	12	6	M12	2	1.50
	CBT40-FMC32-60	P2776134	32	60	83	22	14	7	M16	2	2.30
50	CBT50-FMC22-60	P2776135	22	60	45	18	10	5	M10	1	4.20
	CBT50-FMC22-105	P2776136	22	105	45	18	10	5	M10	1	4.70
	CBT50-FMC22-150	P2776137	22	150	45	18	10	5	M10	1	5.30
	CBT50-FMC27-45	P2776138	27	45	70	20	12	6	M12	1	4.10
	CBT50-FMC27-90	P2776139	27	90	70	20	12	6	M12	1	5.50
	CBT50-FMC27-150	P2776140	27	150	70	20	12	6	M12	1	7.30
	CBT50-FMC32-60	P2776141	32	60	85	22	14	7	M16	1	4.20
	CBT50-FMC32-105	P2776142	32	105	85	22	14	7	M16	1	5.50
	CBT50-FMC32-150	P2776143	32	150	85	22	14	7	M16	1	7.00

◆ INCH TYPE


Unit : mm

TAPER No.	MODEL No.	EDP No.	D	L	C	H	W	K	G	FIG.	WEIGHT (Kg)
30	CBT30-FMC25.4-45	P2776144	25.4	45	70	20	9.5	6	M12	2	1.10
40	CBT40-FMC25.4-60	P2776145	25.4	60	70	20	9.5	6	M12	2	1.50
	CBT40-FMC25.4-90	P2776146	25.4	90	70	20	9.5	6	M12	2	2.20
	CBT40-FMC38.1-60	P2776147	38.1	60	85	22	15.9	7	M16	2	2.30
	CBT40-FMC38.1-75	P2776148	38.1	75	85	22	15.9	7	M16	2	2.60
50	CBT50-FMC25.4-45	P2776149	25.4	45	70	20	9.5	6	M12	1	4.10
	CBT50-FMC25.4-90	P2776150	25.4	90	70	20	9.5	6	M12	1	5.50
	CBT50-FMC25.4-150	P2776151	25.4	150	70	20	9.5	6	M12	1	7.30
	CBT50-FMC38.1-45	P2776152	38.1	45	85	22	15.9	7	M16	1	4.20
	CBT50-FMC38.1-75	P2776153	38.1	75	85	22	15.9	7	M16	1	5.50
	CBT50-FMC38.1-105	P2776154	38.1	105	85	22	15.9	7	M16	1	7.00

- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
- ▶ For parts, please refer to page D313.

NC DRILL CHUCK (KEYLESS TYPE)

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC

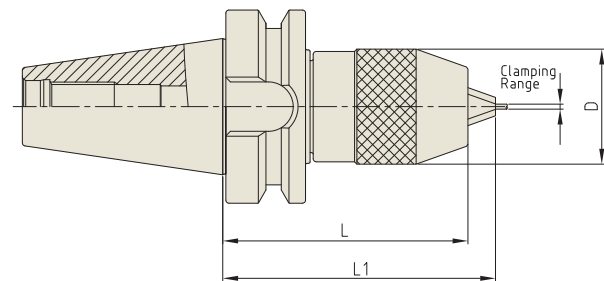

Unit : mm							
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L (Min.)	L1 (Max.)	WEIGHT (Kg)
30	CBT30-NPU8-75	P2776066	0.3 - 8.0	36.5	75	80.7	0.80
	CBT30-NPU13-105	P2776067	1.0 - 13.0	50.4	105	115	1.80
40	CBT40-NPU8-80	P2776068	0.3 - 8.0	36.5	80	85.7	1.50
	CBT40-NPU8-110	P2776054	0.3 - 8.0	36.5	110	115.7	1.80
	CBT40-NPU8-150	P2776055	0.3 - 8.0	36.5	150	155.7	2.60
	CBT40-NPU13-95	P2776069	1.0 - 13.0	50.4	95	105	2.10
	CBT40-NPU13-130	P2776057	1.0 - 13.0	50.4	130	140	2.70
	CBT40-NPU13-150	P2776058	1.0 - 13.0	50.4	150	160	3.40
	CBT50-NPU8-90	P2776059	0.3 - 8.0	36.5	90	95.7	4.20
50	CBT50-NPU8-110	P2776060	0.3 - 8.0	36.5	110	115.7	4.50
	CBT50-NPU8-170	P2776061	0.3 - 8.0	36.5	170	175.7	5.20
	CBT50-NPU13-105	P2776070	1.0 - 13.0	50.4	105	115	4.80
	CBT50-NPU13-130	P2776063	1.0 - 13.0	50.4	130	140	5.20
	CBT50-NPU13-150	P2776064	1.0 - 13.0	50.4	150	160	5.50
	CBT50-NPU13-190	P2776065	1.0 - 13.0	50.4	190	200	5.90

► Supplied with hook wrench. (Size NPU 8 : 8S, NPU 13 : 13S)

YG-1 TOOLING SYSTEM

BT (JIS B6339/MAS 403)



- HYDRAULIC CHUCK
- SHRINK FIT HOLDER
- ER COLLET CHUCK
- END MILL HOLDER (SIDE LOCK ARBOR)
- SHELL MILL ARBOR
- COMBI-SHELL MILL ARBOR
- POWER MILLING CHUCK
- MORSE TAPER ARBOR
- SK SLIM CHUCK
- SYNCHRO TAPPING CHUCK
- ONE STEP TAPPING CHUCK
- TAPPING ER CHUCK
- TAPPING CHUCK
- FACE MILL ARBOR
- COPY MILL ARBOR
- INDEXABLE DRILL HOLDER
- NC DRILL CHUCK
- SIDE CUTTER ARBOR
- JACOBS TAPER ARBOR
- BLANK BAR
- TEST BAR

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HCR

HYDRAULIC CHUCK (RADIAL TOOL LENGTH PRE-SETTING TYPE)

HYDRAULIK SPANNFUTTER (RADIALE WERKZEUGLÄGEN VOREINSTELLUNG)
MANDRIN HYDRAULIQUE (BANC DE PRÉ-RÉGLAGE RADIAL)
MANDRINI IDRAULICI (UTENSILI RADIALI PER AZZERAMENTO)
PORTAHERRAMIENTAS HIDRAULICO (AJUSTE DE LONGITUD TIPO PRE-SETTING)

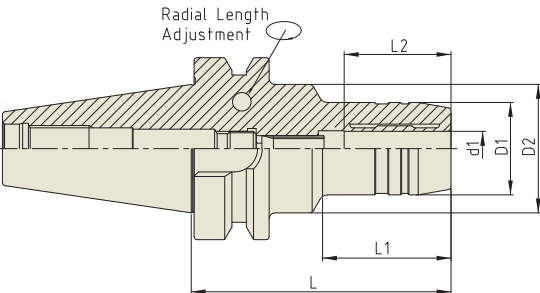

JIS
B6339-
BT



2.5G

25,000
RPM


≤3μm


AD, AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
30	BT30-HCR12-85	P2777102A	12	32	44.5	85	40	37	0.90
	BT30-HCR20-85	P2777103A	20	44	44	85	-	42	1.00
40	BT40AD/B-HCR12-90	P2777104	12	32	44.5	90	42.5	37	1.50
	BT40AD/B-HCR20-90	P2554008	20	42	44.5	90	47.5	42	1.60
	BT40AD/B-HCR32-105	P2777105	32	60	60	105	-	55	2.20
50	BT50AD/B-HCR12-95	P2777106A	12	32	44.5	95	34	37	3.90
	BT50AD/B-HCR20-100	P2777101	20	42	44.5	100	44	42	4.00
	BT50AD/B-HCR32-115	P2777107	32	60	60	115	-	55	4.10

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.




HYDRAULIC
CHUCK

HCP

HYDRAULIC CHUCK (Power E Hydro)

HYDRAULIK SPANNFUTTER (POWER E HYDRO)
MANDRIN HYDRAULIQUE (POWER E HYDRO)
MANDRINI IDRAULICI (POWER E HYDRO)
PORTAHERRAMIENTAS HIDRAULICO (POWER E HYDRO)

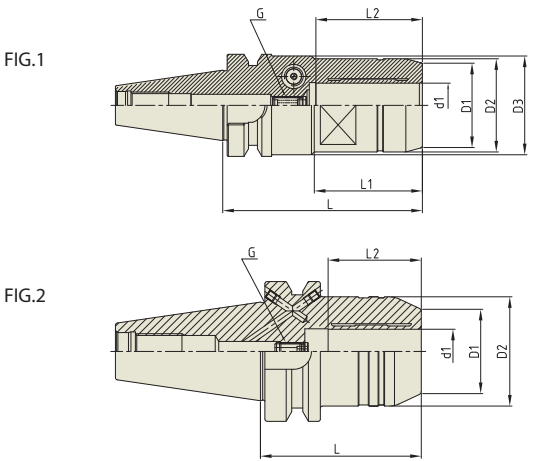

JIS
B6339-
BT



2.5G

25,000
RPM


≤3μm


AD, AD/B

Unit : mm												
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	D3	L	L1	L2	G	FIG.	WEIGHT (Kg)
30	BT30-HC12P-69	P2776604P	12	32	42	44.5	69	30.75	41	M8x1.0	1	0.80
	BT30-HC20P-90	P2776602P	20	38	42	44.5	90	48.75	48	M8x1.0	1	0.90
40	BT40AD/B-HC12P-58	P2776601P	12	32	42	-	58	-	41	M8x1.0	2	1.10
	BT40AD/B-HC20P-72.5	P2554001P	20	39.25	49.25	-	72.5	-	48	M8x1.0	2	1.40
50	BT50AD/B-HC20P-83.5	P2755010P	20	39.25	49.25	-	83.5	-	48	M8x1.0	2	3.90
	BT50AD/B-HC32P-90	P2558001P	32	58.5	72	-	90	-	57	M8x1.0	2	4.60

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D94

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HCP

HYDRAULIC CHUCK (Power E Hydro)

HYDRAULIK SPANNFUTTER (POWER E HYDRO)
MANDRIN HYDRAULIQUE (POWER E HYDRO)
MANDRINI IDRAULICI (POWER E HYDRO)
PORTAHERRAMIENTAS HIDRAULICO (POWER E HYDRO)

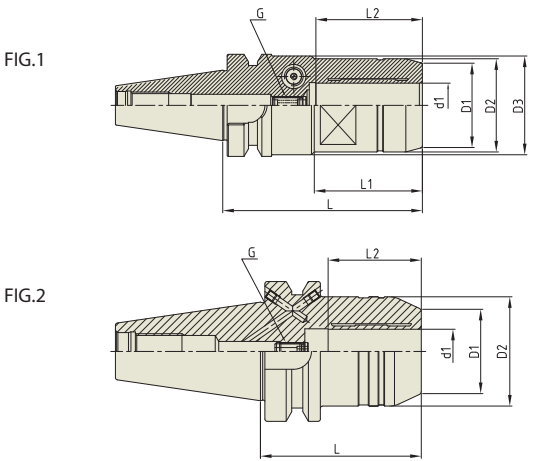

JIS
B6339-
BT



2.5G

25,000
RPM


≤3μm


AD, AD/B

Unit : mm												
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	D3	L	L1	L2	G	FIG.	WEIGHT (Kg)
30	BT30-HC12P-69	P2776604P	12	32	42	44.5	69	30.75	41	M8x1.0	1	0.80
	BT30-HC20P-90	P2776602P	20	38	42	44.5	90	48.75	48	M8x1.0	1	0.90
40	BT40AD/B-HC12P-58	P2776601P	12	32	42	-	58	-	41	M8x1.0	2	1.10
	BT40AD/B-HC20P-72.5	P2554001P	20	39.25	49.25	-	72.5	-	48	M8x1.0	2	1.40
50	BT50AD/B-HC20P-83.5	P2755010P	20	39.25	49.25	-	83.5	-	48	M8x1.0	2	3.90
	BT50AD/B-HC32P-90	P2558001P	32	58.5	72	-	90	-	57	M8x1.0	2	4.60

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D95

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HC

HYDRAULIC CHUCK (ULTRA SHORT)

HYDRAULIK SPANNFUTTER (KURZ)
MANDRIN HYDRAULIQUE (COURT)
MANDRINI IDRAULICI (CORTO)
PORTAHERRAMIENTAS HIDRAULICO (CORTO)



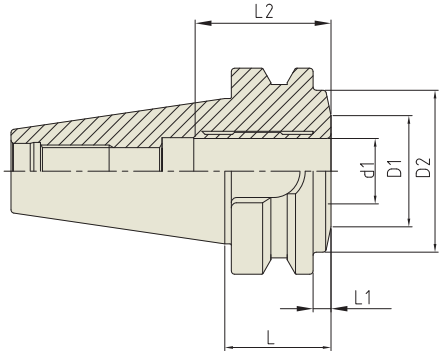

JIS
B6339-
BT



2.5G







Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
40	BT40-HC20-32.5	P2770642	20	34	49.5	32.5	5.5	42	0.99
50	BT50-HC32-50	P2770650	32	49	70.5	50	12	55	3.73

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D98

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HMC

HYDRAULIC CHUCK (SLIM)

HYDRAULIK SPANNFUTTER FÜR DEN FORMENBAU
MANDRIN HYDRAULIQUE POUR MOULISTE
MANDRINI IDRAULICI PER STAMPAGGIO
PORTAHERRAMIENTAS HIDRAULICO PARA MOLDES



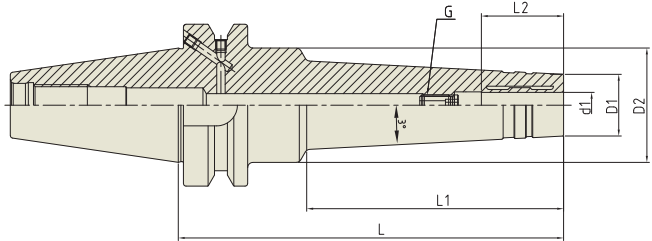

JIS
B6339-
BT



2.5G







Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
40	BT40AD/B-HMC6-120	P2770903	6	20	44.5	120	70	27	M5×0.8	1.40
	BT40AD/B-HMC6-150	P2770904	6	20	44.5	150	100	27	M5×0.8	1.65
	BT40AD/B-HMC8-120	P2770905	8	22	44.5	120	70	27	M6×1.0	1.40
	BT40AD/B-HMC8-150	P2770906	8	22	44.5	150	100	27	M6×1.0	1.65
	BT40AD/B-HMC10-120	P2770907	10	24	44.5	120	70	32	M8×1.0	1.40
	BT40AD/B-HMC10-150	P2770908	10	24	44.5	150	100	32	M8×1.0	1.65
	BT40AD/B-HMC12-120	P2770901	12	25	44.5	120	70	37	M10×1.0	1.40
	BT40AD/B-HMC12-150	P2770909	12	25	44.5	150	100	37	M10×1.0	1.65
	BT40AD/B-HMC14-120	P2784200	14	27	44.5	120	70	37	M10×1.0	1.40
	BT40AD/B-HMC14-150	P2784201	14	27	44.5	150	100	37	M10×1.0	1.65
	BT40AD/B-HMC16-120	P2770910	16	32	44.5	120	70	42	M12×1.0	1.45
	BT40AD/B-HMC16-150	P2770911	16	32	44.5	150	100	42	M12×1.0	1.70
50	BT40AD/B-HMC20-120	P2770902	20	34	43.8	120	93	42	M16×1.0	1.50
	BT40AD/B-HMC20-150	P2770912	20	34	46.9	150	123	42	M16×1.0	1.80
	BT50AD/B-HMC6-150	P2770913	6	20	50	150	90	27	M5×0.8	4.70
	BT50AD/B-HMC8-150	P2770914	8	22	50	150	90	27	M6×1.0	4.70
	BT50AD/B-HMC10-150	P2770915	10	24	50	150	90	32	M8×1.0	4.70
	BT50AD/B-HMC12-150	P2770916	12	25	50	150	90	37	M10×1.0	4.70
	BT50AD/B-HMC14-150	P2784202	14	27	50	150	90	37	M10×1.0	4.70
	BT50AD/B-HMC16-150	P2770917	16	32	50	150	90	42	M12×1.0	4.90
	BT50AD/B-HMC20-150	P2770918	20	34	50	150	90	42	M16×1.0	5.00

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D99

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHRINK FIT
HOLDER

SFHS

SHRINK FIT HOLDER (EXTRA SLIM)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

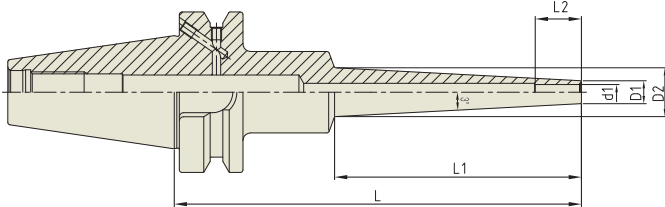

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

LDI
≤ 3μm

AD-AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
30	BT30-SFHS3-60	P2779851S	3	6	20	60	22	9	-
	BT30-SFHS3-80	P2779852S	3	6	25	80	42	9	-
	BT30-SFHS3-120	P2779853S	3	6	25	120	67	9	-
	BT30-SFHS4-60	P2779854S	4	7	20	60	22	12	-
	BT30-SFHS4-80	P2779855S	4	7	25	80	42	12	-
	BT30-SFHS4-120	P2779856S	4	7	25	120	67	12	-
	BT30-SFHS6-60	P2779857S	6	9	20	60	22	18	-
	BT30-SFHS6-80	P2779858S	6	9	25	80	42	18	-
	BT30-SFHS6-120	P2779859S	6	9	25	120	67	18	-
40	BT40AD/B-SFHS3-95	P2779860S	3	6	25	95	42	9	-
	BT40AD/B-SFHS3-120	P2779861S	3	6	25	120	67	9	-
	BT40AD/B-SFHS3-160	P2779862S	3	6	25	160	97	9	-
	BT40AD/B-SFHS4-95	P2779863S	4	7	25	95	42	12	-
	BT40AD/B-SFHS4-120	P2779864S	4	7	25	120	67	12	-
	BT40AD/B-SFHS4-160	P2779865S	4	7	32	160	97	12	-
	BT40AD/B-SFHS6-95	P2779866S	6	9	25	95	42	18	-
	BT40AD/B-SFHS6-120	P2779867S	6	9	25	120	67	18	-
	BT40AD/B-SFHS6-160	P2779868S	6	9	32	160	97	18	-
	BT40AD/B-SFHS8-95	P2779869S	8	11	25	95	42	24	-
	BT40AD/B-SFHS8-120	P2779870S	8	11	32	120	67	24	-
	BT40AD/B-SFHS8-160	P2779871S	8	11	32	160	97	24	-
	BT40AD/B-SFHS10-95	P2779872S	10	13	25	95	42	30	-
	BT40AD/B-SFHS10-120	P2779873S	10	13	32	120	67	30	-
	BT40AD/B-SFHS10-160	P2779874S	10	13	32	160	97	30	-
	BT40AD/B-SFHS12-95	P2779875S	12	15	32	95	42	30	-
	BT40AD/B-SFHS12-120	P2779876S	12	15	32	120	67	30	-
	BT40AD/B-SFHS12-160	P2779877S	12	15	32	160	97	30	-

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► NEXT PAGE

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHRINK FIT
HOLDER

SFHS

SHRINK FIT HOLDER (EXTRA SLIM)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

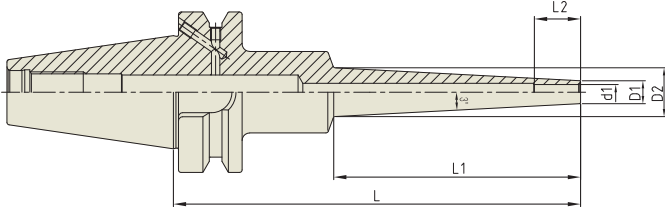

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

LDI
≤ 3μm

AD-AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)
50	BT50AD/B-SFHS3-110	P2779878S	3	6	26	110	42	9	-
	BT50AD/B-SFHS3-160	P2779879S	3	6	26	160	97	9	-
	BT50AD/B-SFHS4-110	P2779880S	4	7	26	110	42	12	-
	BT50AD/B-SFHS4-160	P2779881S	4	7	26	160	97	12	-
	BT50AD/B-SFHS6-110	P2779882S	6	9	26	110	42	18	-
	BT50AD/B-SFHS6-160	P2779883S	6	9	26	160	97	18	-
	BT50AD/B-SFHS8-110	P2779884S	8	11	36	110	42	24	-
	BT50AD/B-SFHS8-160	P2779885S	8	11	36	160	97	24	-
	BT50AD/B-SFHS10-110	P2779886S	10	13	36	110	42	30	-
	BT50AD/B-SFHS10-160	P2779887S	10	13	36	160	97	30	-
	BT50AD/B-SFHS12-110	P2779888S	12	15	36	110	42	30	-
	BT50AD/B-SFHS12-160	P2779889S	12	15	36	160	97	30	-

► Inch type products are available.


► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► NEXT PAGE



SHRINK FIT HOLDER

SCHRUMPFUTTER
MANDRIN DE FRETTAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

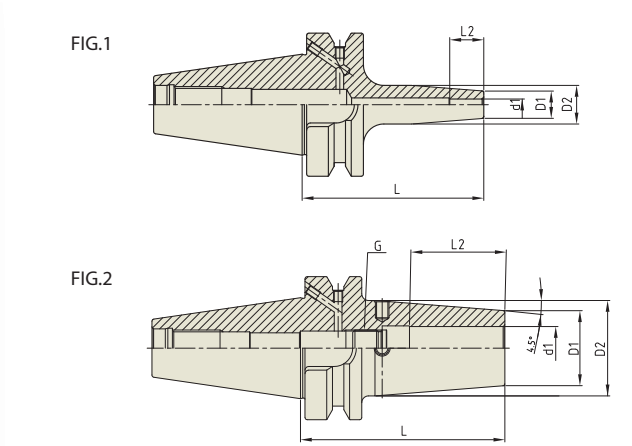

										Unit : mm
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
40	BT40AD/B-SFH16-90	P2771609	16	27	34	90	50	M12×1.0	2	1.20
	BT40AD/B-SFH16-130	P2771662	16	27	34	130	50	M12×1.0	2	-
	BT40AD/B-SFH16-160	P2771610	16	27	34	160	50	M12×1.0	2	1.50
	BT40AD/B-SFH18-90	P2771613	18	33	42	90	50	M12×1.0	2	1.30
	BT40AD/B-SFH18-130	P2771663	18	33	42	130	50	M12×1.0	2	-
	BT40AD/B-SFH18-160	P2771614	18	33	42	160	50	M12×1.0	2	1.60
	BT40AD/B-SFH20-90	P2771615	20	33	42	90	52	M16×1.0	2	1.40
	BT40AD/B-SFH20-130	P2771664	20	33	42	130	52	M16×1.0	2	-
	BT40AD/B-SFH20-160	P2771616	20	33	42	160	52	M16×1.0	2	1.70
	BT40AD/B-SFH25-100	P2771617	25	44	53	100	58	M16×1.0	2	1.70
BT40AD/B-SFH25-130	P2771665	25	44	53	130	58	M16×1.0	2	-	
BT40AD/B-SFH25-160	P2771618	25	44	53	160	58	M16×1.0	2	2.00	
50	BT50AD/B-SFH3-100	P2771619	3	11	15	100	10	-	1	1.50
	BT50AD/B-SFH4-100	P2771620	4	11	15	100	12	-	1	1.50
	BT50AD/B-SFH5-100	P2771621	5	11	15	100	15	-	1	1.50
	BT50AD/B-SFH6-100	P2771622	6	21	27	100	36	M5×0.8	2	1.50
	BT50AD/B-SFH6-130	P2771666	6	21	27	130	36	M5×0.8	2	-
	BT50AD/B-SFH6-160	P2771623	6	21	27	160	36	M5×0.8	2	2.00
	BT50AD/B-SFH6-200	P2771667	6	21	27	200	36	M5×0.8	2	-
	BT50AD/B-SFH8-100	P2771624	8	21	27	100	36	M6×1.0	2	1.50
	BT50AD/B-SFH8-130	P2771668	8	21	27	130	36	M6×1.0	2	-
	BT50AD/B-SFH8-160	P2771625	8	21	27	160	36	M6×1.0	2	2.00
	BT50AD/B-SFH8-200	P2771669	8	21	27	200	36	M6×1.0	2	-
	BT50AD/B-SFH10-100	P2771626	10	24	32	100	42	M8×1.0	2	1.50
	BT50AD/B-SFH10-130	P2771670	10	24	32	130	42	M8×1.0	2	-
	BT50AD/B-SFH10-160	P2771627	10	24	32	160	42	M8×1.0	2	2.00
	BT50AD/B-SFH10-200	P2771671	10	24	32	200	42	M8×1.0	2	-
	BT50AD/B-SFH12-100	P2771628	12	24	32	100	47	M10×1.0	2	1.50
	BT50AD/B-SFH12-130	P2771672	12	24	32	130	47	M10×1.0	2	-
	BT50AD/B-SFH12-160	P2771629	12	24	32	160	47	M10×1.0	2	2.00
BT50AD/B-SFH12-200	P2771673	12	24	32	200	47	M10×1.0	2	-	

- ▶ Inch type products are available.
- ▶ Supplied without balancing screws.
- ▶ Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

▶ NEXT PAGE

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

SHRINK FIT
HOLDER

SFH

SHRINK FIT HOLDER

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR



JIS B6339-BT

AT3

2.5G

25,000 RPM

LD ≤ 3μm

AD/B

FIG.1

FIG.2

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
50	BT50AD/B-SFH14-100	P2771630	14	27	34	100	47	M10×1.0	2	1.60
	BT50AD/B-SFH14-130	P2771674	14	27	34	130	47	M10×1.0	2	-
	BT50AD/B-SFH14-160	P2771631	14	27	34	160	47	M10×1.0	2	2.10
	BT50AD/B-SFH14-200	P2771675	14	27	34	200	47	M10×1.0	2	-
	BT50AD/B-SFH16-100	P2771632	16	27	34	100	50	M12×1.0	2	1.60
	BT50AD/B-SFH16-130	P2771676	16	27	34	130	50	M12×1.0	2	-
	BT50AD/B-SFH16-160	P2771633	16	27	34	160	50	M12×1.0	2	2.10
	BT50AD/B-SFH16-200	P2771677	16	27	34	200	50	M12×1.0	2	-
	BT50AD/B-SFH18-100	P2771634	18	33	42	100	50	M12×1.0	2	1.60
	BT50AD/B-SFH18-130	P2771678	18	33	42	130	50	M12×1.0	2	-
	BT50AD/B-SFH18-160	P2771635	18	33	42	160	50	M12×1.0	2	2.00
	BT50AD/B-SFH18-200	P2771679	18	33	42	200	50	M12×1.0	2	-
	BT50AD/B-SFH20-100	P2771636	20	33	42	100	52	M16×1.0	2	1.80
	BT50AD/B-SFH20-130	P2771680	20	33	42	130	52	M16×1.0	2	-
	BT50AD/B-SFH20-160	P2771637	20	33	42	160	52	M16×1.0	2	2.20
	BT50AD/B-SFH20-200	P2771681	20	33	42	200	52	M16×1.0	2	-
	BT50AD/B-SFH25-100	P2771638	25	44	53	100	58	M16×1.0	2	2.00
	BT50AD/B-SFH25-130	P2771682	25	44	53	130	58	M16×1.0	2	-
BT50AD/B-SFH25-160	P2771639	25	44	53	160	58	M16×1.0	2	2.40	
BT50AD/B-SFH25-200	P2771683	25	44	53	200	58	M16×1.0	2	-	

► Inch type products are available.

► Supplied without balancing screws.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

SHRINK FIT
HOLDER

SFH

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR



JIS B6339-BT

AT3

2.5G

25,000 RPM

LD ≤ 3μm

AD/B+C

FIG.1

FIG.2

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	FIG.	WEIGHT (Kg)
40	BT40AD/B-SFH3C-90*1	P2863000C	3	12	17	90	10	-	1	-
	BT40AD/B-SFH4C-90*1	P2863001C	4	12	17	90	12	-	1	-
	BT40AD/B-SFH5C-90*1	P2863002C	5	12	17	90	15	-	1	-
	BT40AD/B-SFH6C-90	P2862085C	6	21	27	90	36	M5x0.8	2	1.10
	BT40AD/B-SFH6C-130	P2863024C	6	21	27	130	36	M5x0.8	2	-
	BT40AD/B-SFH6C-160	P2862086C	6	21	27	160	36	M5x0.8	2	1.15
	BT40AD/B-SFH8C-90	P2862087C	8	21	27	90	36	M6x1.0	2	1.11
	BT40AD/B-SFH8C-130	P2863025C	8	21	27	130	36	M6x1.0	2	-
	BT40AD/B-SFH8C-160	P2862088C	8	21	27	160	36	M6x1.0	2	1.15
	BT40AD/B-SFH10C-90	P2862089C	10	24	32	90	41	M8x1.0	2	1.10
	BT40AD/B-SFH10C-130	P2863026C	10	24	32	130	41	M8x1.0	2	-
	BT40AD/B-SFH10C-160	P2862090C	10	24	32	160	41	M8x1.0	2	1.15
	BT40AD/B-SFH12C-90	P2862091C	12	24	32	90	47	M10x1.0	2	1.10
	BT40AD/B-SFH12C-130	P2863027C	12	24	32	130	47	M10x1.0	2	-
	BT40AD/B-SFH12C-160	P2862092C	12	24	32	160	47	M10x1.0	2	1.15
	BT40AD/B-SFH14C-90	P2862093C	14	27	34	90	47	M10x1.0	2	1.20
	BT40AD/B-SFH14C-130	P2863028C	14	27	34	130	47	M10x1.0	2	-
	BT40AD/B-SFH14C-160	P2862094C	14	27	34	160	47	M10x1.0	2	1.50
	BT40AD/B-SFH16C-90	P2862095C	16	27	34	90	50	M12x1.0	2	1.20
	BT40AD/B-SFH16C-130	P2863029C	16	27	34	130	50	M12x1.0	2	-
	BT40AD/B-SFH16C-160	P2862096C	16	27	34	160	50	M12x1.0	2	1.50
	BT40AD/B-SFH18C-90	P2862097C	18	33	42	90	50	M12x1.0	2	1.30
	BT40AD/B-SFH18C-130	P2863030C	18	33	42	130	50	M12x1.0	2	-
	BT40AD/B-SFH18C-160	P2862098C	18	33	42	160	50	M12x1.0	2	1.60
	BT40AD/B-SFH20C-90	P2862099C	20	33	42	90	52	M16x1.0	2	1.40
	BT40AD/B-SFH20C-130	P2863031C	20	33	42	130	52	M16x1.0	2	-
	BT40AD/B-SFH20C-160	P2862100C	20	33	42	160	52	M16x1.0	2	1.70
	BT40AD/B-SFH25C-100	P2862101C	25	44	53	100	58	M16x1.0	2	1.70
	BT40AD/B-SFH25C-130	P2863032C	25	44	53	130	58	M16x1.0	2	-
	BT40AD/B-SFH25C-160	P2862102C	25	44	53	160	58	M16x1.0	2	2.00

► Inch type products are available.

► Supplied without balancing screws.


► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► With two coolant channel bores.

► Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)

► *1 Resealable type is not available.

► NEXT PAGE



D104

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D105

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER



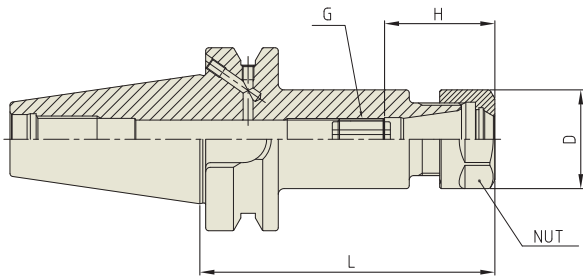

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

AD=AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
30	BT30-ER11-70	P2776501A	0.5 - 7.0	70	19	M6	45	ER11	0.50
	BT30-ER11-100	P2776502A	0.5 - 7.0	100	19	M6	45	ER11	0.50
	BT30-ER16-70	P2776503A	0.5 - 10.0	70	28	M10	45	ER16	1.00
	BT30-ER16-100	P2776506A	0.5 - 10.0	100	28	M10	45	ER16	1.10
	BT30-ER20-80	P2776507A	0.5 - 13.0	80	34	M12	50	ER20	1.20
	BT30-ER20-100	P2776508A	0.5 - 13.0	100	34	M12	50	ER20	1.30
	BT30-ER25-70	P2776509A	1.0 - 16.0	70	42	M12	65	ER25	1.20
	BT30-ER25-100	P2776510A	1.0 - 16.0	100	42	M12	65	ER25	1.30
	BT30-ER32-60	P2776511A	1.0 - 20.0	60	50	M12	65	ER32	1.40
	BT30-ER32-90	P2776512A	1.0 - 20.0	90	50	M12	65	ER32	1.90
40	BT40AD/B-ER11-75	P2776513	0.5 - 7.0	75	19	M6	45	ER11	1.00
	BT40AD/B-ER11-100	P2776514	0.5 - 7.0	100	19	M6	45	ER11	1.10
	BT40AD/B-ER16-75	P2776504	0.5 - 10.0	75	28	M10	45	ER16	1.10
	BT40AD/B-ER16-100	P2553021	0.5 - 10.0	100	28	M10	45	ER16	1.20
	BT40AD/B-ER16-120	P2776515	0.5 - 10.0	120	28	M10	45	ER16	1.40
	BT40AD/B-ER20-75	P2776516	0.5 - 13.0	75	34	M12	50	ER20	1.40
	BT40AD/B-ER20-100	P2553017	0.5 - 13.0	100	34	M12	50	ER20	1.80
	BT40AD/B-ER20-135	P2776517	0.5 - 13.0	135	34	M12	50	ER20	2.20
	BT40AD/B-ER25-75	P2600012	1.0 - 16.0	75	42	M12	65	ER25	1.40
	BT40AD/B-ER25-100	P2553018	1.0 - 16.0	100	42	M12	65	ER25	1.80
	BT40AD/B-ER25-135	P2776518	1.0 - 16.0	135	42	M12	65	ER25	2.20
	BT40AD/B-ER25-150	P2776519	1.0 - 16.0	150	42	M12	65	ER25	2.40
	BT40AD/B-ER32-60	P2553501	1.0 - 20.0	60	50	M12	65	ER32	1.80
	BT40AD/B-ER32-100	P2776505	1.0 - 20.0	100	50	M12	65	ER32	2.20

► Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► For applicable ER collet, please refer to page D296~D304.
► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

► NEXT PAGE

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER



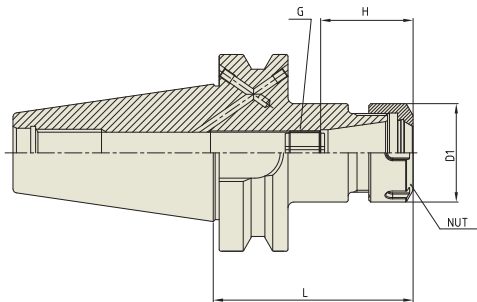

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
30	BT50AD/B-ER16-100	P2776522	0.5 - 10.0	100	28	M10	45	ER16	4.20
	BT50AD/B-ER16-120	P2776523	0.5 - 10.0	120	28	M10	45	ER16	4.40
	BT50AD/B-ER16-165	P2776524	0.5 - 10.0	165	28	M10	45	ER16	4.60
	BT50AD/B-ER20-100	P2776525	0.5 - 13.0	100	34	M12	50	ER20	4.60
	BT50AD/B-ER20-135	P2776526	0.5 - 13.0	135	34	M12	50	ER20	4.80
	BT50AD/B-ER20-165	P2776527	0.5 - 13.0	165	34	M12	50	ER20	5.00
	BT50AD/B-ER25-100	P2776528	1.0 - 16.0	100	42	M12	65	ER25	4.70
	BT50AD/B-ER25-135	P2776529	1.0 - 16.0	135	42	M12	65	ER25	4.80
	BT50AD/B-ER25-165	P2776530	1.0 - 16.0	150	42	M12	65	ER25	5.00
	BT50AD/B-ER32-100	P2600026	1.0 - 20.0	100	50	M12	65	ER32	5.20
50	BT50AD/B-ER32-135	P2776531	1.0 - 20.0	135	50	M12	65	ER32	5.70
	BT50AD/B-ER32-165	P2776532	1.0 - 20.0	165	50	M12	65	ER32	5.80
	BT50AD/B-ER40-100	P2600027	2.0 - 30.0	100	63	M12	75	ER40	5.60
	BT50AD/B-ER40-150	P2776533	2.0 - 30.0	150	63	M12	75	ER40	6.10
	BT50AD/B-ER50-100	P2776534	4.0 - 34.0	100	78	M16	85	ER50	5.80
	BT50AD/B-ER50-150	P2776535	4.0 - 34.0	150	78	M16	85	ER50	6.30

► Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► For applicable ER collet, please refer to page D296~D304.
► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

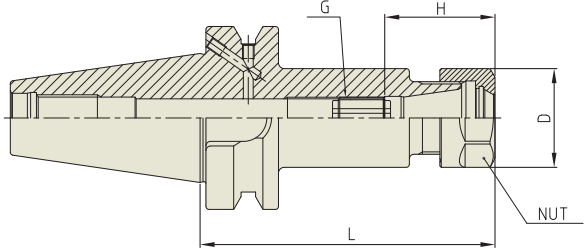

JIS
B6339-
BT

AT3

6.3G

15,000
RPM

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
40	BT40AD/B-ER11-75	P2776551	0.5 - 7.0	75	19	M6	45	ER11	1.00
	BT40AD/B-ER11-100	P2776552	0.5 - 7.0	100	19	M6	45	ER11	1.10
	BT40AD/B-ER16-75	P2776553	0.5 - 10.0	75	28	M10	45	ER16	1.10
	BT40AD/B-ER16-100	P2776554	0.5 - 10.0	100	28	M10	45	ER16	1.20
	BT40AD/B-ER16-120	P2776555	0.5 - 10.0	120	28	M10	45	ER16	1.40
	BT40AD/B-ER20-75	P2776556	0.5 - 13.0	75	34	M12	50	ER20	1.40
	BT40AD/B-ER20-100	P2776557	0.5 - 13.0	100	34	M12	50	ER20	1.80
	BT40AD/B-ER20-135	P2776558	0.5 - 13.0	135	34	M12	50	ER20	2.20
	BT40AD/B-ER25-75	P2776559	1.0 - 16.0	75	42	M12	65	ER25	1.40
	BT40AD/B-ER25-100	P2776560	1.0 - 16.0	100	42	M12	65	ER25	1.80
	BT40AD/B-ER25-135	P2776561	1.0 - 16.0	135	42	M12	65	ER25	2.20
	BT40AD/B-ER25-150	P2776562	1.0 - 16.0	150	42	M12	65	ER25	2.40
	BT40AD/B-ER32-60	P2776563	1.0 - 20.0	60	50	M12	65	ER32	1.80
	BT40AD/B-ER32-100	P2776564	1.0 - 20.0	100	50	M12	65	ER32	2.20
50	BT50AD/B-ER16-100	P2776565	0.5 - 10.0	100	28	M10	45	ER16	4.20
	BT50AD/B-ER16-120	P2776566	0.5 - 10.0	120	28	M10	45	ER16	4.40
	BT50AD/B-ER16-165	P2776567	0.5 - 10.0	165	28	M10	45	ER16	4.60
	BT50AD/B-ER20-100	P2776568	0.5 - 13.0	100	34	M12	50	ER20	4.60
	BT50AD/B-ER20-135	P2776569	0.5 - 13.0	135	34	M12	50	ER20	4.80
	BT50AD/B-ER20-165	P2776570	0.5 - 13.0	165	34	M12	50	ER20	5.00
	BT50AD/B-ER25-100	P2776571	1.0 - 16.0	100	42	M12	65	ER25	4.70
	BT50AD/B-ER25-135	P2776572	1.0 - 16.0	135	42	M12	65	ER25	4.80
	BT50AD/B-ER25-165	P2776573	1.0 - 16.0	165	42	M12	65	ER25	5.00
	BT50AD/B-ER32-100	P2776574	1.0 - 20.0	100	50	M12	65	ER32	5.20
	BT50AD/B-ER32-135	P2776575	1.0 - 20.0	135	50	M12	65	ER32	5.70
	BT50AD/B-ER32-165	P2776576	1.0 - 20.0	165	50	M12	65	ER32	5.80
	BT50AD/B-ER40-100	P2776577	2.0 - 30.0	100	63	M12	75	ER40	5.60
	BT50AD/B-ER40-150	P2776578	2.0 - 30.0	150	63	M12	75	ER40	6.10
	BT50AD/B-ER50-100	P2776579	4.0 - 34.0	100	78	M16	85	ER50	5.80
	BT50AD/B-ER50-150	P2776580	4.0 - 34.0	150	78	M16	85	ER50	6.30

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

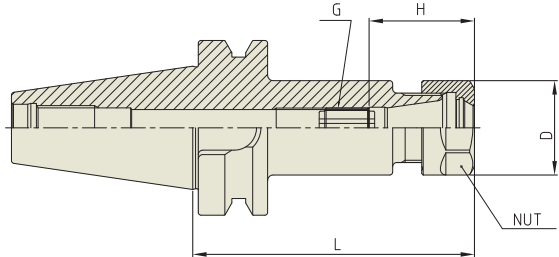

JIS
B6339-
BT

AT3

6.3G

15,000
RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
30	BT30-ER11-70	P2772107	0.5 - 7.0	70	19	M6	45	ER11	0.50
	BT30-ER11-100	P2772108	0.5 - 7.0	100	19	M6	45	ER11	0.50
	BT30-ER16-70	P2772109	0.5 - 10.0	70	28	M10	45	ER16	1.00
	BT30-ER16-100	P2772110	0.5 - 10.0	100	28	M10	45	ER16	1.10
	BT30-ER20-80	P2772111	0.5 - 13.0	80	34	M12	50	ER20	1.20
	BT30-ER20-100	P2772112	0.5 - 13.0	100	34	M12	50	ER20	1.30
	BT30-ER25-70	P2772106	1.0 - 16.0	70	42	M12	65	ER25	1.20
	BT30-ER25-100	P2772113	1.0 - 16.0	100	42	M12	65	ER25	1.30
	BT30-ER32-60	P2772144	1.0 - 20.0	60	50	M12	65	ER32	1.40
	BT30-ER32-90	P2772115	1.0 - 20.0	90	50	M12	65	ER32	1.90
40	BT40-ER11-75	P2772116	0.5 - 7.0	75	19	M6	45	ER11	1.00
	BT40-ER11-100	P2772117	0.5 - 7.0	100	19	M6	45	ER11	1.10
	BT40-ER16-75	P2772101	0.5 - 10.0	75	28	M10	45	ER16	1.10
	BT40-ER16-100	P2772118	0.5 - 10.0	100	28	M10	45	ER16	1.20
	BT40-ER16-120	P2772119	0.5 - 10.0	120	28	M10	45	ER16	1.40
	BT40-ER20-75	P2772102	0.5 - 13.0	75	34	M12	50	ER20	1.40
	BT40-ER20-100	P2772120	0.5 - 13.0	100	34	M12	50	ER20	1.80
	BT40-ER20-135	P2772121	0.5 - 13.0	135	34	M12	50	ER20	2.20
	BT40-ER25-75	P2772103	1.0 - 16.0	75	42	M12	65	ER25	1.40
	BT40-ER25-100	P2772122	1.0 - 16.0	100	42	M12	65	ER25	1.80
	BT40-ER25-135	P2772123	1.0 - 16.0	135	42	M12	65	ER25	2.20
	BT40-ER25-150	P2772124	1.0 - 16.0	150	42	M12	65	ER25	2.40
	BT40-ER32-60	P2772104	1.0 - 20.0	60	50	M12	65	ER32	1.80
	BT40-ER32-100	P2772125	1.0 - 20.0	100	50	M12	65	ER32	2.20
	BT40-ER32-120	P2772105	1.0 - 20.0	120	50	M12	65	ER32	2.40
	BT40-ER32-150	P2772126	1.0 - 20.0	150	50	M12	65	ER32	2.60
	BT40-ER40-80	P2772127	2.0 - 30.0	80	63	M12	75	ER40	1.50

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

► NEXT PAGE

D112

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D113

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST


TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

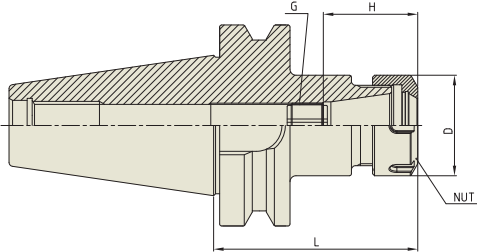

JIS
B6339-
BT

AT3

6.3G

15,000
RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50	BT50-ER16-100	P2772128	0.5 - 10.0	100	28	M10	45	ER16	4.20
	BT50-ER16-120	P2772129	0.5 - 10.0	120	28	M10	45	ER16	4.40
	BT50-ER16-165	P2772130	0.5 - 10.0	165	28	M10	45	ER16	4.60
	BT50-ER20-100	P2772131	0.5 - 13.0	100	34	M12	50	ER20	4.60
	BT50-ER20-135	P2772132	0.5 - 13.0	135	34	M12	50	ER20	4.80
	BT50-ER20-165	P2772133	0.5 - 13.0	165	34	M12	50	ER20	5.00
	BT50-ER25-100	P2772134	1.0 - 16.0	100	42	M12	65	ER25	4.70
	BT50-ER25-135	P2772135	1.0 - 16.0	135	42	M12	65	ER25	4.80
	BT50-ER25-165	P2772136	1.0 - 16.0	165	42	M12	65	ER25	5.00
	BT50-ER32-100	P2772137	1.0 - 20.0	100	50	M12	65	ER32	5.20
	BT50-ER32-135	P2772138	1.0 - 20.0	135	50	M12	65	ER32	5.70
	BT50-ER32-165	P2772139	1.0 - 20.0	165	50	M12	65	ER32	5.80
	BT50-ER40-100	P2772140	2.0 - 30.0	100	63	M12	75	ER40	5.60
	BT50-ER40-150	P2772141	2.0 - 30.0	150	63	M12	75	ER40	6.10
	BT50-ER50-100	P2772142	4.0 - 34.0	100	78	M16	85	ER50	5.80
	BT50-ER50-150	P2772143	4.0 - 34.0	150	78	M16	85	ER50	6.30

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING
SYSTEM



ER COLLET
CHUCK

ERM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST



TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK (SLIM)

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

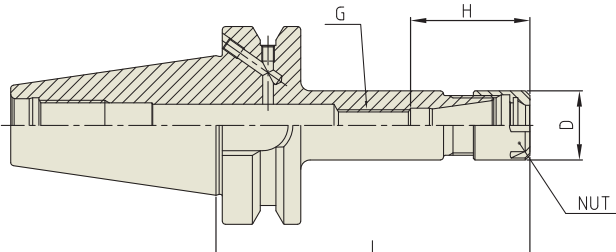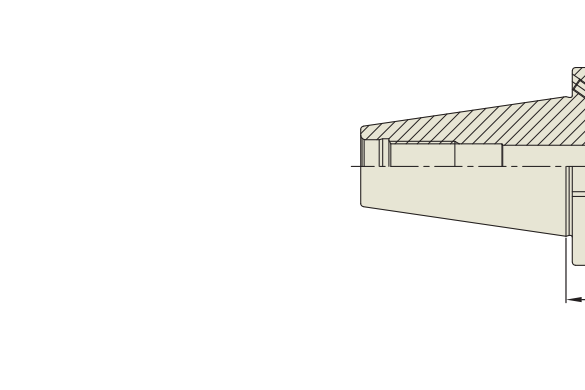

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

AD/B

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
40	BT40AD/B-ER11M-60	P2802735	0.5 - 7.0	60	16	M6	29.5	ER11M / ER11	1.00
	BT40AD/B-ER11M-90	P2802736	0.5 - 7.0	90	16	M6	29.5	ER11M / ER11	1.10
	BT40AD/B-ER11M-135	P2802737	0.5 - 7.0	135	16	M6	29.5	ER11M / ER11	1.20
	BT40AD/B-ER16M-60	P2802738	0.5 - 10.0	60	22	M10	38	ER16M / ER16	1.10
	BT40AD/B-ER16M-90	P2802739	0.5 - 10.0	90	22	M10	38	ER16M / ER16	1.20
	BT40AD/B-ER16M-135	P2802740	0.5 - 10.0	135	22	M10	38	ER16M / ER16	1.40
	BT40AD/B-ER20M-60	P2802741	0.5 - 13.0	60	28	M12	44.5	ER20M / ER20	1.10
	BT40AD/B-ER20M-90	P2802742	0.5 - 13.0	90	28	M12	44.5	ER20M / ER20	1.50
	BT40AD/B-ER20M-150	P2802743	0.5 - 13.0	150	28	M12	44.5	ER20M / ER20	1.80
	BT40AD/B-ER25M-60	P2802744	1.0 - 16.0	60	35	M12	52	ER25M / ER25	1.20
	BT40AD/B-ER25M-90	P2802745	1.0 - 16.0	90	35	M12	52	ER25M / ER25	1.40
	BT40AD/B-ER25M-150	P2802746	1.0 - 16.0	150	35	M12	52	ER25M / ER25	1.80
50	BT50AD/B-ER11M-90	P2802747	0.5 - 7.0	90	16	M6	29.5	ER11M / ER11	3.80
	BT50AD/B-ER11M-120	P2802748	0.5 - 7.0	120	16	M6	29.5	ER11M / ER11	3.90
	BT50AD/B-ER11M-165	P2802749	0.5 - 7.0	165	16	M6	29.5	ER11M / ER11	4.00
	BT50AD/B-ER16M-90	P2802750	0.5 - 10.0	90	22	M10	38	ER16M / ER16	3.80
	BT50AD/B-ER16M-120	P2802751	0.5 - 10.0	120	22	M10	38	ER16M / ER16	4.00
	BT50AD/B-ER16M-165	P2802752	0.5 - 10.0	165	22	M10	38	ER16M / ER16	4.20
	BT50AD/B-ER20M-75	P2802753	0.5 - 13.0	75	28	M12	44.5	ER20M / ER20	3.80
	BT50AD/B-ER20M-105	P2802754	0.5 - 13.0	105	28	M12	44.5	ER20M / ER20	3.90
	BT50AD/B-ER20M-165	P2802755	0.5 - 13.0	165	28	M12	44.5	ER20M / ER20	4.50
	BT50AD/B-ER25M-75	P2802756	1.0 - 16.0	75	35	M12	52	ER25M / ER25	3.90
	BT50AD/B-ER25M-105	P2802757	1.0 - 16.0	105	35	M12	52	ER25M / ER25	4.10

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable ER collet please refer to page D296~D304.

► For applicable ER nut, Sealing disk, please refer to page D307 & D309.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




ER COLLET CHUCK

ER

ER COLLET CHUCK (SLIM)

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

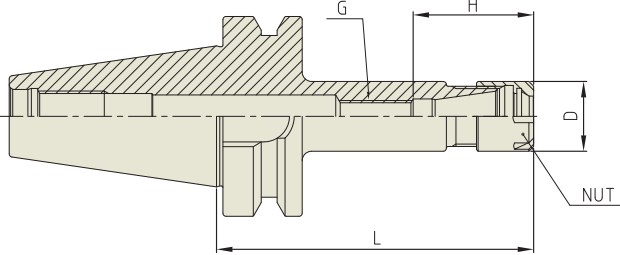

JIS B6339-BT

AT3

6.3G

15,000 RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
30	BT30-ER11M-50	P2802601	0.5 - 7.0	50	16	M6	29.5	ER11M / ER11	0.50
	BT30-ER11M-75	P2802602	0.5 - 7.0	75	16	M6	29.5	ER11M / ER11	0.50
	BT30-ER11M-100	P2802603	0.5 - 7.0	100	16	M6	29.5	ER11M / ER11	0.60
	BT30-ER16M-50	P2802604	0.5 - 10.0	50	22	M10	38	ER16M / ER16	0.50
	BT30-ER16M-75	P2802605	0.5 - 10.0	75	22	M10	38	ER16M / ER16	0.50
	BT30-ER16M-100	P2802606	0.5 - 10.0	100	22	M10	38	ER16M / ER16	0.60
	BT30-ER20M-50	P2802607	0.5 - 13.0	50	28	M12	44.5	ER20M / ER20	0.50
	BT30-ER20M-75	P2802608	0.5 - 13.0	75	28	M12	44.5	ER20M / ER20	0.60
	BT30-ER20M-100	P2802609	0.5 - 13.0	100	28	M12	44.5	ER20M / ER20	0.70
	BT30-ER25M-50	P2802610	1.0 - 16.0	50	35	M12	52	ER25M / ER25	0.60
	BT30-ER25M-75	P2802611	1.0 - 16.0	75	35	M12	52	ER25M / ER25	0.70
	BT30-ER25M-100	P2802612	1.0 - 16.0	100	35	M12	52	ER25M / ER25	0.80
40	BT40-ER11M-60	P2802613	0.5 - 7.0	60	16	M6	29.5	ER11M / ER11	1.00
	BT40-ER11M-90	P2802614	0.5 - 7.0	90	16	M6	29.5	ER11M / ER11	1.10
	BT40-ER11M-135	P2802615	0.5 - 7.0	135	16	M6	29.5	ER11M / ER11	1.20
	BT40-ER16M-60	P2802616	0.5 - 10.0	60	22	M10	38	ER16M / ER16	1.10
	BT40-ER16M-90	P2802617	0.5 - 10.0	90	22	M10	38	ER16M / ER16	1.20
	BT40-ER16M-135	P2802618	0.5 - 10.0	135	22	M10	38	ER16M / ER16	1.40
	BT40-ER20M-60	P2802619	0.5 - 13.0	60	28	M12	44.5	ER20M / ER20	1.10
	BT40-ER20M-90	P2802620	0.5 - 13.0	90	28	M12	44.5	ER20M / ER20	1.50
	BT40-ER20M-150	P2802621	0.5 - 13.0	150	28	M12	44.5	ER20M / ER20	1.80
	BT40-ER25M-60	P2802622	1.0 - 16.0	60	35	M12	52	ER25M / ER25	1.20
	BT40-ER25M-90	P2802623	1.0 - 16.0	90	35	M12	52	ER25M / ER25	1.40
	BT40-ER25M-150	P2802624	1.0 - 16.0	150	35	M12	52	ER25M / ER25	1.80
50	BT50-ER11M-90	P2802625	0.5 - 7.0	90	16	M6	29.5	ER11M / ER11	3.80
	BT50-ER11M-120	P2802626	0.5 - 7.0	120	16	M6	29.5	ER11M / ER11	3.90
	BT50-ER11M-165	P2802627	0.5 - 7.0	165	16	M6	29.5	ER11M / ER11	4.00
	BT50-ER16M-90	P2802628	0.5 - 10.0	90	22	M10	38	ER16M / ER16	3.80
	BT50-ER16M-120	P2802629	0.5 - 10.0	120	22	M10	38	ER16M / ER16	4.00
	BT50-ER16M-165	P2802630	0.5 - 10.0	165	22	M10	38	ER16M / ER16	4.20
	BT50-ER20M-75	P2802631	0.5 - 13.0	75	28	M12	44.5	ER20M / ER20	3.80
	BT50-ER20M-105	P2802632	0.5 - 13.0	105	28	M12	44.5	ER20M / ER20	3.90
	BT50-ER20M-165	P2802633	0.5 - 13.0	165	28	M12	44.5	ER20M / ER20	4.50
	BT50-ER25M-75	P2802634	1.0 - 16.0	75	35	M12	52	ER25M / ER25	3.90
	BT50-ER25M-105	P2802635	1.0 - 16.0	105	35	M12	52	ER25M / ER25	4.10

► Inch type products are available.
► For applicable ER collet, please refer to page D296~D304.
► For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS



END MILL HOLDER

EMH

END MILL HOLDER (SHORT TYPE)

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1





FIG.2



JIS B6339-BT

AT3

6.3G

15,000 RPM

AD

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	BT40-EMH25-60	P2773085	25	62	60	59	24	25	M18/M14	1	1.50
	BT40-EMH32-65	P2773086	32	62	65	63	24	28	M20/M14	1	1.45
50	BT50-EMH25-44	P2773087	25	57	44	59	24	-	M18	2	3.45
	BT50-EMH32-60	P2773088	32	72	60	63	24	28	M20/M14	1	3.80

► Inch type products are available.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

Y/G

END MILL
HOLDER

EMH

END MILL HOLDER

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

AD=AD/B

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
30	BT30-EMH6-50	P2772951A	6	25	50	37	18	-	M6	1	0.47
	BT30-EMH8-50	P2772952A	8	28	50	37	18	-	M8	1	0.49
	BT30-EMH10-50	P2772953A	10	35	50	41	20	-	M10	1	0.55
	BT30-EMH12-55	P2772954A	12	42	55	46	22.5	-	M12	1	0.67
	BT30-EMH14-55	P2772955A	14	44	55	46	22.5	-	M12	1	0.68
	BT30-EMH16-63	P2772956A	16	48	63	54	24	-	M14	1	0.83
	BT30-EMH18-63	P2772958A	18	50	63	49	24	-	M14	1	0.85
	BT30-EMH20-70	P2772957A	20	52	70	48	25	-	M16	1	0.98
40	BT40AD/B-EMH6-50	P2773031	6	25	50	35	18	-	M6	1	1.00
	BT40AD/B-EMH8-50	P2773032	8	28	50	37	18	-	M8	1	1.00
	BT40AD/B-EMH10-63	P2773033	10	35	63	39	20	-	M10	1	1.10
	BT40AD/B-EMH12-63	P2773034	12	42	63	44	22.5	-	M12	1	1.30
	BT40AD/B-EMH14-63	P2773035	14	44	63	49	22.5	-	M12	1	1.40
	BT40AD/B-EMH16-63	P2773036	16	48	63	52	24	-	M14	1	1.70
	BT40AD/B-EMH18-63	P2773037	18	50	63	52	24	-	M14	1	1.70
	BT40AD/B-EMH20-63	P2773038	20	52	63	52	25	-	M16	1	1.80
50	BT40AD/B-EMH25-90	P2773039	25	65	90	60	24	25	M18	2	1.80
	BT40AD/B-EMH32-100	P2773040	32	72	100	64	24	28	M20	2	2.00
	BT50AD/B-EMH6-63	P2773041	6	25	63	35	18	-	M6	1	3.30
	BT50AD/B-EMH8-63	P2773042	8	28	63	35	18	-	M8	1	3.60
	BT50AD/B-EMH10-65	P2773043	10	35	65	39	20	-	M10	1	3.80
	BT50AD/B-EMH12-80	P2773044	12	42	80	46	22.5	-	M12	1	3.80
	BT40AD/B-EMH14-80	P2773045	14	44	80	46	22.5	-	M12	1	4.00
	BT50AD/B-EMH16-80	P2773046	16	48	80	49	24	-	M14	1	4.00
	BT50AD/B-EMH18-80	P2773047	18	50	80	49	24	-	M14	1	4.20
	BT50AD/B-EMH20-80	P2773048	20	52	80	52	25	-	M16	1	4.20
	BT50AD/B-EMH25-100	P2773049	25	65	100	60	24	25	M18	2	4.60
	BT50AD/B-EMH32-105	P2773050	32	72	105	64	24	28	M20	2	4.70
	BT50AD/B-EMH40-120	P2773051	40	80	120	73	30	32	M20	2	4.90

► Inch type products are available.

► Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D118

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

Y/G

END MILL
HOLDER

EMH

END MILL HOLDER (COOLANT CHANNEL)

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

JIS
B6339-
BT

AT3

2.5G

25,000
RPM

AD/B+C

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	BT40AD/B-EMH6C-50	P2772991	6	25	50	35	18	-	M6	1	1.00
	BT40AD/B-EMH8C-50	P2772992	8	28	50	35	18	-	M8	1	1.00
	BT40AD/B-EMH10C-63	P2772993	10	35	63	39	20	-	M10	1	1.10
	BT40AD/B-EMH12C-63	P2772994	12	42	63	44	22.5	-	M12	1	1.30
	BT40AD/B-EMH14C-63	P2772995	14	44	63	49	22.5	-	M12	1	1.40
	BT40AD/B-EMH16C-63	P2772996	16	48	63	52	24	-	M14	1	1.70
	BT40AD/B-EMH18C-63	P2772997	18	50	63	50	24	-	M14	1	1.70
	BT40AD/B-EMH20C-63	P2772998	20	52	63	52	25	-	M16	1	1.80
	BT40AD/B-EMH25C-90	P2772999	25	65	90	60	24	25	M18	2	1.80
	BT40AD/B-EMH32C-100	P2773000	32	72	100	64	24	28	M20	2	2.00
50	BT50AD/B-EMH6C-63	P2773012	6	25	63	35	18	-	M6	1	3.30
	BT50AD/B-EMH8C-63	P2773013	8	28	63	35	18	-	M8	1	3.60
	BT50AD/B-EMH10C-65	P2773014	10	35	65	39	20	-	M10	1	3.80
	BT50AD/B-EMH12C-80	P2773015	12	42	80	46	22.5	-	M12	1	3.80
	BT40AD/B-EMH14C-80	P2773016	14	44	80	46	22.5	-	M12	1	4.00
	BT50AD/B-EMH16C-80	P2773017	16	48	80	49	24	-	M14	1	4.00
	BT50AD/B-EMH18C-80	P2773018	18	50	80	49	24	-	M14	1	4.20
	BT50AD/B-EMH20C-80	P2773019	20	52	80	52	25	-	M16	1	4.20
	BT50AD/B-EMH25C-100	P2773020	25	65	100	60	24	25	M18	2	4.60
	BT50AD/B-EMH32C-105	P2773021	32	72	105	64	24	28	M20	2	4.70
	BT50AD/B-EMH40C-120	P2773022	40	80	120	74	30	32	M20	2	4.90

► Inch type products are available.

► Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D119

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

Y/G

END MILL HOLDER

EMH

END MILL HOLDER (COOLANT CHANNEL)

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

JIS B6339-BT

AT3

6.3G

15,000 RPM

AD/B+C

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40	BT40AD/B-EMH6C-50	P2778001	6	25	50	35	18	-	M6	1	1.00
	BT40AD/B-EMH8C-50	P2778002	8	28	50	35	18	-	M8	1	1.00
	BT40AD/B-EMH10C-63	P2778003	10	35	63	39	20	-	M10	1	1.10
	BT40AD/B-EMH12C-63	P2778004	12	42	63	44	22.5	-	M12	1	1.30
	BT40AD/B-EMH14C-63	P2778005	14	44	63	49	22.5	-	M12	1	1.40
	BT40AD/B-EMH16C-63	P2778006	16	48	63	52	24	-	M14	1	1.70
	BT40AD/B-EMH18C-63	P2778007	18	50	63	50	24	-	M14	1	1.70
	BT40AD/B-EMH20C-63	P2778008	20	52	63	52	25	-	M16	1	1.80
	BT40AD/B-EMH25C-90	P2778009	25	65	90	60	24	25	M18	2	1.80
	BT40AD/B-EMH32C-100	P2778010	32	72	100	64	24	28	M20	2	2.00
50	BT50AD/B-EMH6C-63	P2778011	6	25	63	35	18	-	M6	1	3.30
	BT50AD/B-EMH8C-63	P2778012	8	28	63	35	18	-	M8	1	3.60
	BT50AD/B-EMH10C-65	P2778013	10	35	65	39	20	-	M10	1	3.80
	BT50AD/B-EMH12C-80	P2778014	12	42	80	46	22.5	-	M12	1	3.80
	BT40AD/B-EMH14C-80	P2778015	14	44	80	46	22.5	-	M12	1	4.00
	BT50AD/B-EMH16C-80	P2778016	16	48	80	49	24	-	M14	1	4.00
	BT50AD/B-EMH18C-80	P2778017	18	50	80	49	24	-	M14	1	4.20
	BT50AD/B-EMH20C-80	P2778018	20	52	80	52	25	-	M16	1	4.20
	BT50AD/B-EMH25C-100	P2778019	25	65	100	60	24	25	M18	2	4.60
	BT50AD/B-EMH32C-105	P2778020	32	72	105	64	24	28	M20	2	4.70
	BT50AD/B-EMH40C-120	P2778021	40	80	120	74	30	32	M20	2	4.90

▶ Inch type products are available.

▶ Standard End Mill Holder is for a cutting tool with Weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

▶ Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

D122

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

Y/G

SIDE LOCK ARBOR

SLA

SIDE LOCK ARBOR

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



FIG.1

FIG.2

JIS B6339-BT

AT3

AD

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	G	FIG.	WEIGHT (Kg)	
30	BT30-SLA6-60	P2780201	6	25	60	35	18	-	M5	M5	1	0.70	
	BT30-SLA8-60	P2780202	8	28	60	35	18	-	M6	M6	1	0.80	
	BT30-SLA10-60	P2780203	10	35	60	50	14	13	M8	M8	2	0.90	
	BT30-SLA12-60	P2780204	12	40	60	50	14	13	M10	M10	2	1.10	
	BT30-SLA14-60	P2780205	14	40	60	50	14	13	M10	M10	2	1.20	
	BT30-SLA16-75	P2780206	16	40	75	70	25	20	M12	M12	2	1.30	
	BT30-SLA20-75	P2780207	20	50	75	70	25	20	M12	M12	2	1.40	
	BT30-SLA25-75	P2780208	25	50	75	70	25	20	M14	M12	2	1.50	
	BT30-SLA32-105	P2780209	32	60	105	80	25	25	M16	M12	2	1.60	
	40	BT40-SLA6-60	P2780210	6	25	60	35	18	-	M5	M5	1	1.10
BT40-SLA8-60		P2780211	8	28	60	35	18	-	M6	M6	1	1.10	
BT40-SLA10-60		P2780212	10	35	60	50	14	13	M8	M8	2	1.20	
BT40-SLA12-60		P2780213	12	40	60	50	14	13	M10	M10	2	1.40	
BT40-SLA16-90		P2780214	16	40	90	70	25	20	M12	M12	2	1.50	
BT40-SLA20-90		P2780215	20	50	90	70	25	20	M12	M12	2	1.80	
BT40-SLA25-90		P2780216	25	50	90	70	25	20	M14	M12	2	1.70	
BT40-SLA32-90		P2780217	32	60	90	80	25	25	M16	M12	2	1.90	
BT40-SLA40-90		P2780218	40	63	90	80	25	25	M16	M12	2	1.80	
BT40-SLA42-90		P2780219	42	63	90	80	25	25	M16	M12	2	1.80	
50		BT50-SLA6-90	P2780220	6	25	90	40	18	-	M5	M5	1	3.70
		BT50-SLA8-90	P2780221	8	28	90	40	18	-	M6	M6	1	3.90
	BT50-SLA10-90	P2780222	10	35	90	50	15	15	M8	M8	2	4.10	
	BT50-SLA12-90	P2780223	12	40	90	55	15	15	M10	M10	2	4.30	
	BT50-SLA14-90	P2780224	14	40	90	55	15	15	M10	M10	2	4.30	
	BT50-SLA16-105	P2780225	16	40	105	70	25	20	M12	M12	2	4.40	
	BT50-SLA20-105	P2780226	20	50	105	70	25	20	M12	M12	2	4.80	
	BT50-SLA25-105	P2780227	25	50	105	70	25	20	M14	M12	2	4.70	
	BT50-SLA32-105	P2780228	32	60	105	80	25	25	M16	M12	2	4.00	
	BT50-SLA40-105	P2780229	40	70	105	80	25	25	M16	M12	2	4.50	
	BT50-SLA42-105	P2780230	42	70	105	80	25	25	M16	M12	2	4.70	
	BT50-SLA50.8-121	P2780231	50.8	95	121	87	33.9	35.8	M20	-	2	5.00	

▶ Inch type products are available.

▶ Standard design of Side Lock Arbor is for cutting tools with straight shank having flat face.

▶ Side Lock Arbor is Non-Balancing.

D123

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SIDE LOCK ARBOR

SLB

SIDE LOCK ARBOR

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



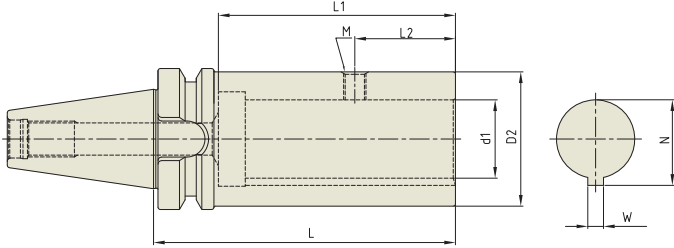

JIS
B6339-
BT

AT3

A

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	M	N	W	WEIGHT (Kg)
40	BT40-SLB26-105	P2778051	26	50	105	85	40	M10	28.2	5	1.30
	BT40-SLB35-135	P2778052	35	60	135	105	55	M10	37.6	6	2.20
	BT40-SLB35T-135	P2778053	35	60	135	105	55	M10	38.2	7	2.20
50	BT50-SLB26-105	P2778054	26	50	105	85	40	M10	28.2	5	1.30
	BT50-SLB35-135	P2778055	35	60	135	106	55	M10	37.6	6	2.20
	BT50-SLB35T-135	P2778056	35	60	135	106	55	M10	38.2	7	2.20
	BT50-SLB48-165	P2778057	48	80	165	129	65	M10	51	8	3.80

► Inch type products are available.

► Standard design of Side Lock Arbor is for cutting tools with straight shank having flat face.

► Side Lock Arbor is Non-Balancing.

D124

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SHELL MILL ARBOR

SMA

SHELL MILL ARBOR

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL



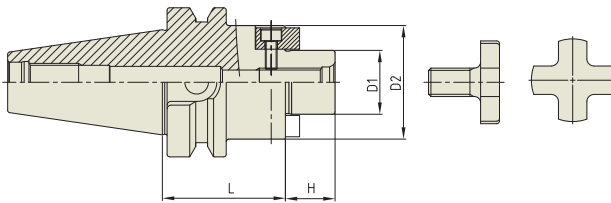

JIS
B6339-
BT

AT3

6.3G

15,000
RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
30	BT30-SMA16-50	P2778801	16	32	50	17	M8x16L	0.58
	BT30-SMA22-50	P2778802	22	40	50	19	M10x18L	0.70
	BT30-SMA27-50	P2778803	27	48	50	21	M12x22L	0.85
40	BT40-SMA16-60	P2778804	16	32	60	17	M8x16L	1.17
	BT40-SMA16-120	P2778815	16	32	120	17	M8x16L	1.50
	BT40-SMA22-60	P2778805	22	40	60	19	M10x18L	1.31
	BT40-SMA22-120	P2778816	22	40	120	19	M10x18L	1.85
	BT40-SMA27-60	P2778806	27	48	60	21	M12x22L	1.48
	BT40-SMA27-120	P2778817	27	48	120	21	M12x22L	2.27
	BT40-SMA32-60	P2778807	32	58	60	24	M16x26L	1.72
	BT40-SMA32-120	P2778818	32	58	120	24	M16x26L	2.90
	BT40-SMA40-60	P2778808	40	70	60	27	M20x30L	2.00
50	BT50-SMA16-75	P2778809	16	32	75	17	M8x16L	3.75
	BT50-SMA16-120	P2778819	16	32	120	17	M8x16L	4.03
	BT50-SMA22-75	P2778810	22	40	75	19	M10x18L	3.90
	BT50-SMA22-120	P2778820	22	40	120	19	M10x18L	4.25
	BT50-SMA27-75	P2778811	27	48	75	21	M12x22L	4.09
	BT50-SMA27-120	P2778821	27	48	120	21	M12x22L	4.56
	BT50-SMA32-75	P2778812	32	58	75	24	M16x26L	4.35
	BT50-SMA32-120	P2778822	32	58	120	24	M16x26L	5.22
	BT50-SMA40-75	P2778813	40	70	75	27	M20x30L	4.77
	BT50-SMA40-120	P2778823	40	70	120	27	M20x30L	6.04
	BT50-SMA50-75	P2778814	50	90	75	30	M24x36L	5.60

► Inch type products are available.

► For parts, please refer to page D311.

D125

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




MORSE TAPER
ARBOR

MTA

MORSE TAPER ARBOR

EINSATZHÜLSEN FÜR MORSEKEGEL
DOUILLES DE RÉDUCTION CÔNE MORSE
MANDRINO RIDUZIONE CONO MORSE
REDUCTORES A MORSE



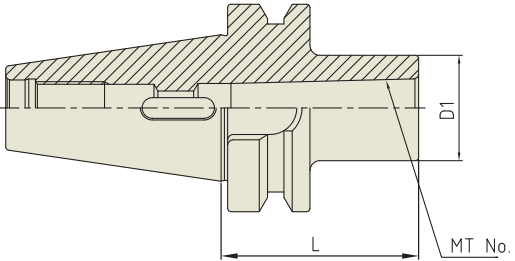

JIS
B6339-
BT

AT3

6.3G

15,000
RPM

A

Unit : mm						
TAPER No.	MODEL No.	EDP No.	MT No.	D1	L	WEIGHT (Kg)
30	BT30-MTA1-45	P2542001	1	25	45	0.40
	BT30-MTA2-60	P2542002	2	32	60	0.50
	BT30-MTA2-120	P2542003	2	32	120	0.60
	BT30-MTA3-75	P2542004	3	40	75	0.70
40	BT40-MTA1-45	P2542005	1	25	45	1.00
	BT40-MTA1-120	P2542006	1	25	120	1.30
	BT40-MTA2-60	P2542013	2	32	60	1.00
	BT40-MTA2-120	P2542009	2	32	120	1.40
	BT40-MTA3-75	P2542014	3	40	75	1.20
	BT40-MTA3-135	P2542010	3	40	135	1.80
	BT40-MTA4-95	P2542007	4	50	95	1.10
	BT40-MTA4-165	P2542011	4	50	165	2.40
50	BT50-MTA1-45	P2542008	1	25	45	4.00
	BT50-MTA1-120	P2542017	1	25	120	4.30
	BT50-MTA1-180	P2542018	1	25	180	4.30
	BT50-MTA2-45	P2542015	2	32	45	4.00
	BT50-MTA2-135	P2542019	2	32	135	4.40
	BT50-MTA2-180	P2542020	2	32	180	4.60
	BT50-MTA3-45	P2542021	3	40	45	3.90
	BT50-MTA3-150	P2542022	3	40	150	4.70
	BT50-MTA3-180	P2542016	3	40	180	4.90
	BT50-MTA4-75	P2542023	4	50	75	4.00
	BT50-MTA4-105	P2542024	4	50	105	4.50
	BT50-MTA4-180	P2542025	4	50	180	5.40
	BT50-MTA5-105	P2542012	5	65	105	4.50
	BT50-MTA5-210	P2542026	5	65	210	7.20
	BT50-MTA5-270	P2542027	5	65	270	7.50

► Inch type products are available.

D132

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




MORSE TAPER
ARBOR

MTB

MORSE TAPER ARBOR

EINSATZHÜLSEN FÜR MORSEKEGEL
DOUILLES DE RÉDUCTION CÔNE MORSE
MANDRINO RIDUZIONE CONO MORSE
REDUCTORES A MORSE



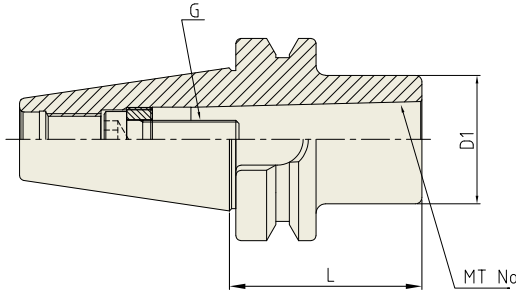

JIS
B6339-
BT

AT3

6.3G

15,000
RPM

A

Unit : mm							
TAPER No.	MODEL No.	EDP No.	MT No.	D1	L	G	WEIGHT (Kg)
30	BT30-MTB1-45	P2542028	1	25	45	M6×1.0	0.80
	BT30-MTB2-45	P2542029	2	32	45	M10×1.5	0.80
40	BT40-MTB1-45	P2600019	1	25	45	M6×1.0	1.00
	BT40-MTB2-45	P2600020	2	32	45	M10×1.5	1.10
	BT40-MTB3-60	P2543016	3	40	60	M12×1.75	1.10
50	BT40-MTB4-85	P2600021	4	50	85	M16×2.0	1.30
	BT50-MTB1-45	P2543008	1	25	45	M6×1.0	3.90
	BT50-MTB2-45	P2542030	2	32	45	M10×1.5	3.90
	BT50-MTB3-60	P2542031	3	40	60	M12×1.75	3.90
	BT50-MTB4-75	P2542032	4	50	75	M16×2.0	3.90

► Inch type products are available.

D133

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SYNCHRO
TAPPING CHUCK

SYTER

SYNCHRO TAPPING CHUCK (ER TYPE)

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO

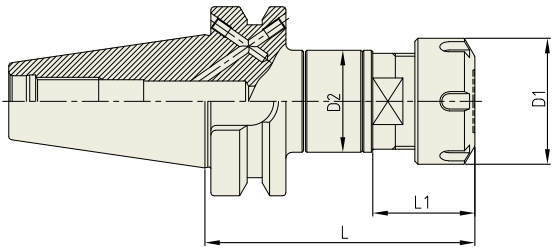

JIS
B6339-
BT

AT3

AD/B

Unit : mm										
TAPER No.	MODEL No.	EDP No.	TAP SIZE	NUT / COLLET	D1	D2	L	L1	TENSION/ COMPRESSION	WEIGHT (Kg)
30	BT30-SYTER12-85	P2776315	M3-M12	ER16	28	34	85	26	±0.2	-
	BT30-SYTER20-95	P2776316	M3-M20	ER25	42	34	95	34	±0.2	-
	BT30-SYTER27-90	P2776317	M4-M27	ER32	50	45	90	31	±0.2	-
40	BT40AD/B-SYTER12-79	P2776301	M3-M12	ER16	28	34	79	26	±0.2	1.14
	BT40AD/B-SYTER16-85	P2776302	M3-M16	ER20	34	34	85	27	±0.2	1.17
	BT40AD/B-SYTER20-90	P2776303	M3-M20	ER25	42	34	90	34	±0.2	1.17
	BT40AD/B-SYTER27-100	P2776304	M4-M27	ER32	50	45	100	31	±0.2	1.45
	BT40AD/B-SYTER33-125	P2776305	M4-M33	ER40	63	62	125	35	±0.2	2.40
50	BT50AD/B-SYTER12-100	P2776306	M3-M12	ER16	28	34	100	26	±0.2	3.79
	BT50AD/B-SYTER16-100	P2776307	M3-M16	ER20	34	34	100	27	±0.2	3.79
	BT50AD/B-SYTER20-100	P2776308	M3-M20	ER25	42	34	100	34	±0.2	3.75
	BT50AD/B-SYTER27-110	P2776309	M4-M27	ER32	50	45	110	31	±0.2	3.99
	BT50AD/B-SYTER33-125	P2776310	M4-M33	ER40	63	62	125	35	±0.2	4.75

► Feature :

- Compensation for synchronization errors to extend tap life and to improve thread quality.

- To compensate for pitch tolerances of taps.

- For machine with synchronized spindle

► Inch type products are available.

► ER collet of page D296~D302, and Tap ER collet of page D303~D304 are applicable.

D138

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ONE STEP
TAPPING CHUCK

OTC

ONE STEP TAPPING CHUCK

GEWINDE-SCHNELLWECHSELFUTTER
MANDRIN DE TARAUDAGE À CHANGEMENT RAPIDE
PORTAMASCHI A CAMBIO RAPIDO
MANDRINO DE CAMBIO RÁPIDO CON ROSCA

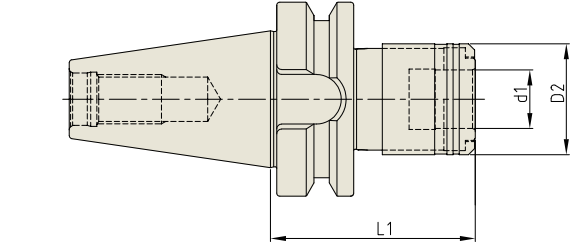

JIS
B6339-
BT

AT3

A

Unit : mm								
TAPER No.	MODEL No.	EDP No.	d1	D2	L1	LENGTH COMPENSATION		WEIGHT (Kg)
						Compression	Tension	
40	BT40-OTC-M3-M12-66.5	P2802451	19	36	66.5	7.5	7.5	1.10
	BT40-OTC-M8-M20-93.5	P2802452	31	53	93.5	12.5	12.5	1.50
	BT40-OTC-M14-M36-162.5	P2802453	48	78	162.5	20	20	3.30
50	BT50-OTC-M3-M12-85	P2802454	19	36	85	7.5	7.5	3.00
	BT50-OTC-M8-M20-101.5	P2802455	31	53	101.5	12.5	12.5	3.30
	BT50-OTC-M14-M36-141	P2802456	48	78	141	20	20	5.20

► For applicable Tap Adaptor, please refer to the page D318~D319.

D139

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





INDEXABLE
DRILL HOLDER

SL

INDEXABLE DRILL HOLDER

WERKZEUGHALTER FÜR VOLLBOHRER
MANDRIN POUR FORETS À PLAQUETTES
MANDRINO PER PUNTE A INSERTI
SOPORTE PARA HERRAMIENTAS PARA BROCAS DE ACERO MACIZO

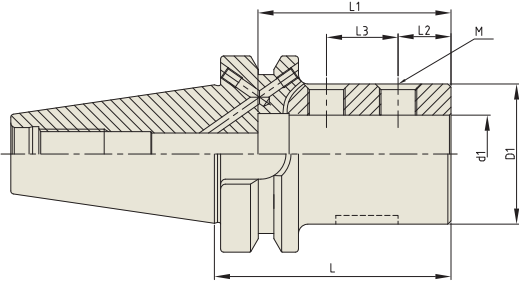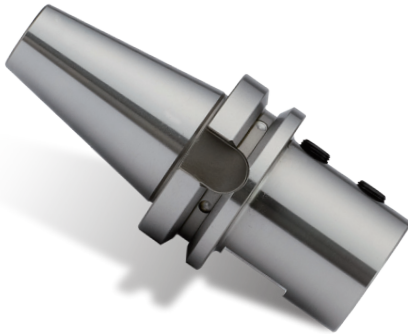

JIS
B6339-
BT



6.3G





Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	L	L1	L2	L3	M	WEIGHT (Kg)
40	BT40AD/B-SL20-72	P2802101	20	40	72	54	15	20	M10	1.09
	BT40AD/B-SL25-76	P2802102	25	45	76	62	17	23	M12	1.11
	BT40AD/B-SL32-80	P2802103	32	52	80	67	17	27	M12	1.17
	BT40AD/B-SL40-100	P2802104	40	60	100	73	22	28	M16	1.67
50	BT50AD/B-SL20-90	P2802105	20	40	90	54	15	20	M10	3.74
	BT50AD/B-SL25-90	P2802106	25	45	90	59	17	23	M12	3.81
	BT50AD/B-SL32-90	P2802107	32	52	90	70	17	27	M12	3.90
	BT50AD/B-SL40-100	P2802108	40	60	100	80	22	28	M16	4.12

► For the indexable drills with parallel shank.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




NC DRILL
CHUCK

NPU

NC DRILL CHUCK (KEYLESS TYPE)

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC

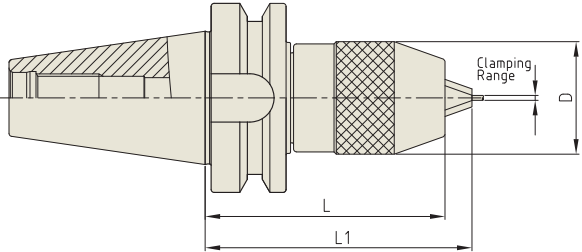



JIS
B6339-
BT






Unit : mm							
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L (Min.)	L1 (Max.)	WEIGHT (Kg)
30	BT30-NPU8-75	P2776016	0.3 - 8.0	36.5	75	80.7	0.80
	BT30-NPU13-105	P2776017	0.3 - 13.0	50.4	105	115	1.80
40	BT40-NPU8-80	P2776018	0.3 - 8.0	36.5	80	85.7	1.50
	BT40-NPU8-110	P2776006	0.3 - 8.0	36.5	110	115.7	1.80
	BT40-NPU8-150	P2776007	0.3 - 8.0	36.5	150	155.7	2.60
	BT40-NPU13-95	P2776019	0.3 - 13.0	50.4	95	100.7	2.10
	BT40-NPU13-130	P2776008	0.3 - 13.0	50.4	130	140	2.70
	BT40-NPU13-150	P2776003	0.3 - 13.0	50.4	150	160	3.40
50	BT50-NPU8-90	P2776009	0.3 - 8.0	36.5	90	95.7	4.20
	BT50-NPU8-110	P2776010	0.3 - 8.0	36.5	110	115.7	4.50
	BT50-NPU8-170	P2776011	0.3 - 8.0	36.5	170	180.7	5.20
	BT50-NPU13-105	P2776020	0.3 - 13.0	50.4	105	115	4.80
	BT50-NPU13-130	P2776013	0.3 - 13.0	50.4	130	140	5.20
	BT50-NPU13-150	P2776014	0.3 - 13.0	50.4	150	160	5.50
	BT50-NPU13-190	P2776015	0.3 - 13.0	50.4	190	200	5.90

► Supplied with hook wrench. (Size NPU 8 : 8S, NPU 13 : 13S)

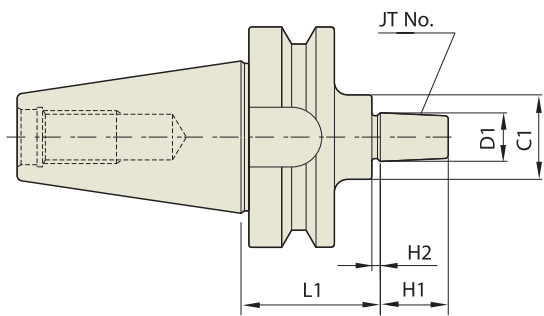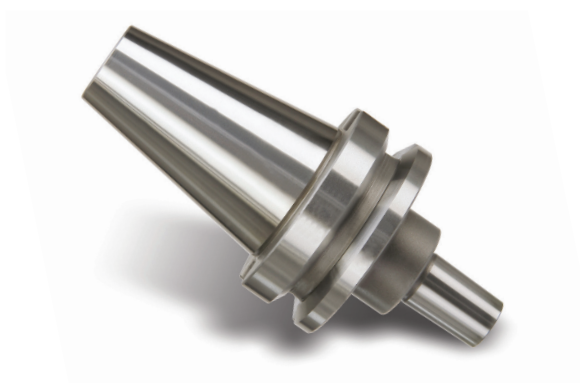

									Unit : mm	
TAPER No.	MODEL No.	EDP No.	JT No.	D1	L1	H1	H2	C1	WEIGHT (Kg)	
30	BT30-JTA1-45	P2779101	1	9.754	45	14	3	30	0.90	
	BT30-JTA2-45	P2779102	2	14.199	45	20	4	30	1.00	
	BT30-JTA6-45	P2779103	6	17.17	45	24	4	30	1.00	
40	BT40-JTA1-45	P2779104	1	9.754	45	14	3	30	1.10	
	BT40-JTA1-90	P2779105	1	9.754	90	14	3	30	1.10	
	BT40-JTA2S-45	P2779106	2(SHORT)	13.94	45	18	3	30	1.40	
	BT40-JTA2S-90	P2779107	2(SHORT)	13.94	90	18	3	30	1.40	
	BT40-JTA2-45	P2779108	2	14.199	45	20	4	30	1.10	
	BT40-JTA2-90	P2779109	2	14.199	90	20	4	30	1.40	
	BT40-JTA33-45	P2779110	33	15.85	45	24	4	30	1.10	
	BT40-JTA33-90	P2779111	33	15.85	90	24	4	30	1.40	
	BT40-JTA6-45	P2779112	6	17.17	45	24	4	30	1.10	
	BT40-JTA6-90	P2779113	6	17.17	90	24	4	30	1.40	
	BT40-JTA3-45	P2779114	3	20.599	45	28	5	35	1.20	
	BT40-JTA3-90	P2779115	3	20.599	90	28	5	35	1.50	
	50	BT50-JTA1-45	P2779116	1	9.754	45	14	3	30	4.00
		BT50-JTA1-105	P2779117	1	9.754	105	14	3	30	4.40
BT50-JTA2S-45		P2779118	2(SHORT)	13.94	45	18	3	30	4.00	
BT50-JTA2S-105		P2779119	2(SHORT)	13.94	105	18	3	30	4.40	
BT50-JTA2-45		P2779120	2	14.199	45	20	4	30	4.00	
BT50-JTA2-105		P2779121	2	14.199	105	20	4	30	4.40	
BT50-JTA33-45		P2779122	33	15.85	45	24	4	30	4.00	
BT50-JTA33-105		P2779123	33	15.85	105	24	4	30	4.40	
BT50-JTA6-45		P2779124	6	17.17	45	24	4	30	4.00	
BT50-JTA6-105		P2779125	6	17.17	105	24	4	30	4.40	
BT50-JTA3-45		P2779126	3	20.599	45	28	5	35	4.00	
BT50-JTA3-105		P2779127	3	20.599	105	28	5	35	4.60	

► CAT(ASME B5.50) taper and Inch type products are available.

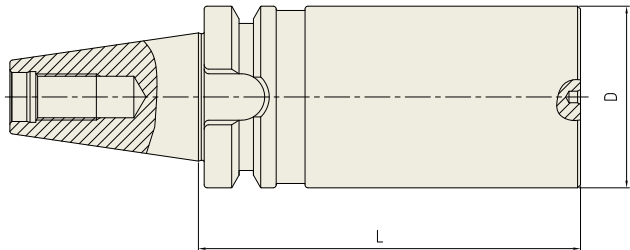

					Unit : mm
TAPER No.	MODEL No.	EDP No.	D	L	WEIGHT(Kg)
40	BT40-BL63-250	P2779191	63	250	6.37
50	BT50-BL97-315	P2779351	97	315	19.60

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




TEST
BAR

TB

TEST BAR

KONTROLLDORN
MANDRIN DE CONTRÔLE
MANDRINO DI CONTROLLO
MANDRIL DE CONTROL



JIS
B6339-
BT







Unit : mm					
TAPER No.	MODEL No.	EDP No.	D	L	WEIGHT(Kg)
40	BT40-TB40-300	P2802305	40	300	4.59
50	BT50-TB50-300	P2802307	50	300	6.88

YG-1 TOOLING SYSTEM

HSK
(DIN 69893/ISO 12164)



HYDRAULIC CHUCK

SHRINK FIT HOLDER

ER COLLET CHUCK

END MILL HOLDER

SHELL MILL ARBOR

COMBI-SHELL MILL ARBOR

POWER MILLING CHUCK

MORSE TAPER ARBOR

SK SLIM CHUCK

SYNCHRO TAPPING CHUCK

ONE STEP TAPPING CHUCK

TAPPING ER CHUCK

TAPPING CHUCK

FACE MILL ARBOR

COPY MILL ARBOR

INDEXABLE DRILL HOLDER

NC DRILL CHUCK

BLANK BAR

TEST BAR

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



HYDRAULIC
CHUCK

HCR

HYDRAULIC CHUCK (RADIAL TOOL LENGTH PRE-SETTING TYPE)

HYDRAULIK SPANNFUTTER (RADIALE WERKZEUGLÄGEN VOREINSTELLUNG)


MANDRIN HYDRAULIQUE (BANC DE PRÉ-RÉGLAGE RADIAL)

MANDRINI IDRAULICI (UTENSILI RADIALI PER AZZERAMENTO)

PORTAHERRAMIENTAS HIDRAULICO (AJUSTE DE LONGITUD TIPO PRE-SETTING)

HSK-A



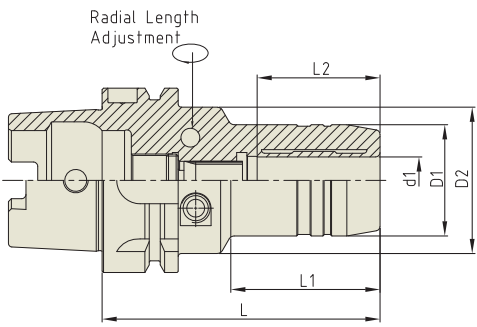

DIN
69893-
HSK



2.5G







Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	WEIGHT (Kg)	
40A	HSK40A-HCR6-80	P2770210	6	26	34	80	36	27	0.55	
	HSK40A-HCR8-80	P2770211	8	28	34	80	36	27	0.55	
	HSK40A-HCR10-85	P2770212	10	30	34	85	43	32	0.65	
	HSK40A-HCR12-90	P2770213	12	32	34	90	48	37	0.70	
50A	HSK50A-HCR6-80	P2770214	6	26	40	80	35	27	0.70	
	HSK50A-HCR8-80	P2770215	8	28	40	80	36	27	0.70	
	HSK50A-HCR10-85	P2770216	10	30	40	85	38	32	0.73	
	HSK50A-HCR12-90	P2770217	12	32	40	90	40	37	0.80	
	HSK50A-HCR14-90	P2770218	14	34	40	90	40	42	0.80	
	HSK50A-HCR16-95	P2770219	16	38	53	95	36.5	42	1.00	
	HSK50A-HCR18-95	P2770220	18	40	57	95	36.5	42	1.00	
	HSK50A-HCR20-100	P2770221	20	42	60	100	39	42	1.10	
63A	HSK63A-HCR6-80	P2770205	6	26	50	80	33	27	0.96	
	HSK63A-HCR8-80	P2770206	8	28	50	80	33	27	0.98	
	HSK63A-HCR10-85	P2770207	10	30	50	85	38	32	1.04	
	HSK63A-HCR12-90	P2567011	12	32	50	90	40	37	1.06	
	HSK63A-HCR14-90	P2770202	14	34	50	90	46	37	1.08	
	HSK63A-HCR16-95	P2770209	16	38	50	95	51	42	1.18	
	HSK63A-HCR18-95	P2770203	18	40	50	95	52	42	1.20	
	HSK63A-HCR20-100	P2567012	20	42	50	100	51	42	1.22	
	HSK63A-HCR25-120	P2770204	25	57	63	120	54.5	48	2.20	
	HSK63A-HCR32-125	P2770201	32	64	75	125	57.5	55	2.60	
100A	HSK100A-HCR6-85	P2770222	6	26	63	85	33	27	3.60	
	HSK100A-HCR8-85	P2770223	8	28	63	85	33	27	3.60	
	HSK100A-HCR10-90	P2770224	10	30	63	90	36	32	3.80	
	HSK100A-HCR12-95	P2770225	12	32	63	95	40	37	3.80	
	HSK100A-HCR14-95	P2770226	14	34	63	95	41	37	3.80	
	HSK100A-HCR16-100	P2770227	16	38	63	100	46	42	3.90	
	HSK100A-HCR18-100	P2770228	18	40	63	100	46	42	3.90	
	HSK100A-HCR20-105	P2770229	20	42	75	105	51	42	4.20	
	HSK100A-HCR25-115	P2770230	25	57	75	115	55.5	48	4.40	
	HSK100A-HCR32-120	P2770231	32	64	75	120	63.5	55	4.60	

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



HYDRAULIC
CHUCK

HCP

HYDRAULIC CHUCK (Power E Hydro)


HYDRAULIK SPANNFUTTER (POWER E HYDRO)


MANDRIN HYDRAULIQUE (POWER E HYDRO)

MANDRINI IDRAULICI (POWER E HYDRO)

PORTAHERRAMIENTAS HIDRAULICO (POWER E HYDRO)

HSK-A

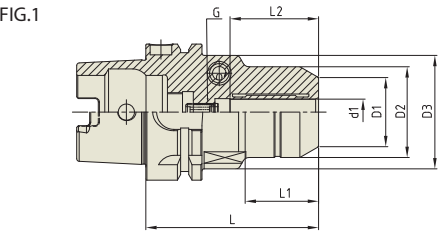

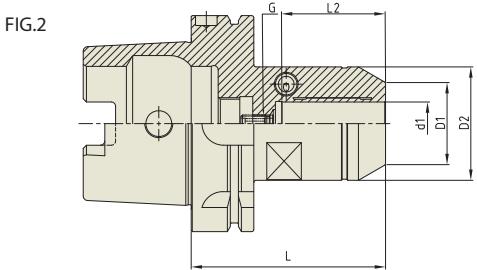

DIN
69893-
HSK



2.5G







Unit : mm												
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	D3	L	L1	L2	G	FIG.	WEIGHT (Kg)
63A	HSK63A-HC12P-80	P2770302P	12	32	42	52.5	80	34	41	M8x1.0	1	1.20
	HSK63A-HC20P-80	P2770301P	20	38	52.5	-	80	-	48	M8x1.0	2	1.30
100A	HSK100A-HC20P-90	P2770303P	20	38	52.5	-	90	-	48	M8x1.0	2	2.80
	HSK100A-HC32P-100	P2770304P	32	58.5	72	-	100	-	57	M8x1.0	2	3.70

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

D154

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D155

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





HYDRAULIC
CHUCK

HC

HYDRAULIC CHUCK (STANDARD)

HYDRAULIK SPANNFUTTER (STANDARD)
MANDRIN HYDRAULIQUE (STANDARD)
MANDRINI IDRAULICI (STANDARD)
PORTAHERRAMIENTAS HIDRAULICO (ESTÁNDAR)

HSK-A

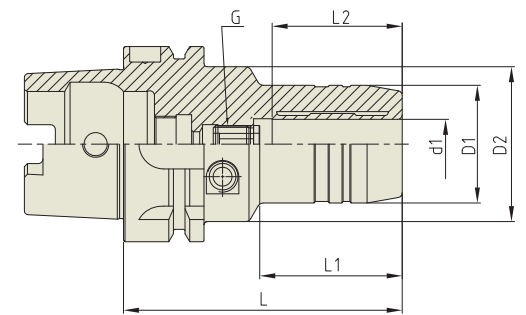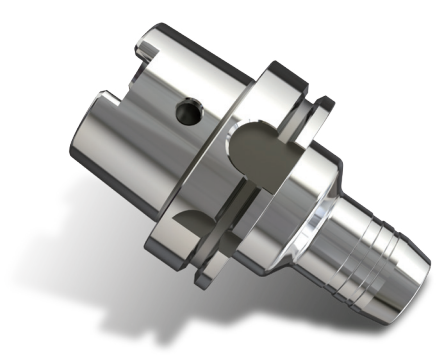

DIN
69893-
HSK

2.5G

25,000
RPM


(at 3D)
≤ 3μm


AD

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
32A	HSK32A-HC6-80	P2770413	6	26	40	80	29	27	M5×0.8	0.30
	HSK32A-HC8-80	P2770414	8	28	40	80	29	27	M6×1.0	0.30
	HSK32A-HC10-85	P2770415	10	30	40	85	35	32	M6×1.0	0.30
	HSK32A-HC12-90	P2770416	12	32	40	90	40	37	M6×1.0	0.30
40A	HSK40A-HC6-70	P2770401	6	26	34	70	36	27	M5×0.8	0.50
	HSK40A-HC8-70	P2770402	8	28	34	70	36	27	M6×1.0	0.50
	HSK40A-HC10-75	P2770403	10	30	34	75	42	32	M6×1.0	0.60
	HSK40A-HC12-80	P2770417	12	32	34	80	48	37	M6×1.0	0.65
50A	HSK50A-HC6-70	P2770404	6	26	40	70	28	27	M5×0.8	0.65
	HSK50A-HC8-70	P2770405	8	28	40	70	28	27	M6×1.0	0.65
	HSK50A-HC10-75	P2770406	10	30	40	75	34	32	M8×1.0	0.70
	HSK50A-HC12-85	P2770407	12	32	40	85	44	37	M10×1.0	0.75
	HSK50A-HC14-85	P2770408	14	34	40	85	43	37	M10×1.0	0.75
	HSK50A-HC16-90	P2770409	16	38	53	90	30	42	M12×1.0	0.90
	HSK50A-HC18-90	P2770418	18	40	57	90	30	42	M12×1.0	0.90
	HSK50A-HC20-90	P2770419	20	42	60	90	29	42	M16×1.0	1.00
63A	HSK63A-HC6-70	P2567001	6	26	50	70	24	27	M5×0.8	0.53
	HSK63A-HC8-70	P2567002	8	28	50	70	25	27	M6×1.0	0.55
	HSK63A-HC10-80	P2567003	10	30	50	80	35	32	M8×1.0	1.00
	HSK63A-HC12-85	P2567004	12	32	50	85	40	37	M10×1.0	1.03
	HSK63A-HC14-85	P2567005	14	34	50	85	40	37	M10×1.0	1.05
	HSK63A-HC16-90	P2567006	16	38	50	90	46	42	M12×1.0	1.15
	HSK63A-HC18-90	P2567007	18	40	50	90	47	42	M12×1.0	1.15
	HSK63A-HC20-90	P2567008	20	42	50	90	48	42	M16×1.0	1.20
	HSK63A-HC25-120	P2567009	25	57	63	120	59	48	M16×1.0	2.20
	HSK63A-HC32-125	P2567010	32	64	75	125	63	55	M16×1.0	2.40

► Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► Supplied with clamping T-wrench.
► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

► NEXT PAGE

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS





HYDRAULIC
CHUCK

HC

HYDRAULIC CHUCK (STANDARD)

HYDRAULIK SPANNFUTTER (STANDARD)
MANDRIN HYDRAULIQUE (STANDARD)
MANDRINI IDRAULICI (STANDARD)
PORTAHERRAMIENTAS HIDRAULICO (ESTÁNDAR)

HSK-A

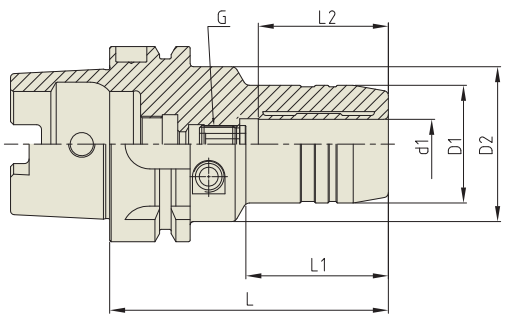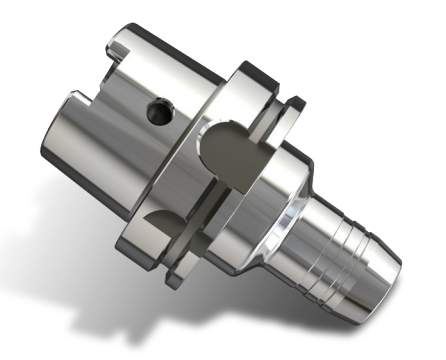

DIN
69893-
HSK

2.5G

25,000
RPM


(at 3D)
≤ 3μm


AD

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
80A	HSK80A-HC12-85	P2770462	12	32	50	85	40	37	M10×1.0	1.60
	HSK80A-HC20-95	P2770463	20	42	50	95	52	42	M16×1.0	1.80
	HSK80A-HC32-125	P2770464	32	64	75	125	63	55	M16×1.0	3.30
100A	HSK100A-HC6-75	P2770420	6	26	50	75	26	27	M5×0.8	3.20
	HSK100A-HC8-75	P2770421	8	28	50	75	26	27	M6×1.0	3.20
	HSK100A-HC10-90	P2770422	10	30	50	90	42	32	M8×1.0	3.40
	HSK100A-HC12-95	P2770410	12	32	50	95	47	37	M10×1.0	3.40
	HSK100A-HC14-95	P2770423	14	34	50	95	47	37	M10×1.0	3.40
	HSK100A-HC16-100	P2770411	16	38	50	100	53	42	M12×1.0	3.50
	HSK100A-HC18-100	P2770424	18	40	50	100	53	42	M12×1.0	3.60
	HSK100A-HC20-105	P2757010	20	42	50	105	59	42	M16×1.0	4.00
	HSK100A-HC25-110	P2770412	25	57	63	110	62	48	M16×1.0	4.20
	HSK100A-HC32-110	P2757020	32	64	75	110	62	55	M16×1.0	4.30

► Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► Supplied with clamping T-wrench.
► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



HYDRAULIC
CHUCK


HMC

HYDRAULIC CHUCK (SLIM)

HYDRAULIK SPANNFUTTER FÜR DEN FORMENBAU
MANDRIN HYDRAULIQUE POUR MOULISTE
MANDRINI IDRAULICI PER STAMPAGGIO
PORTAHERRAMIENTAS HIDRAULICO PARA MOLDES

HSK-A



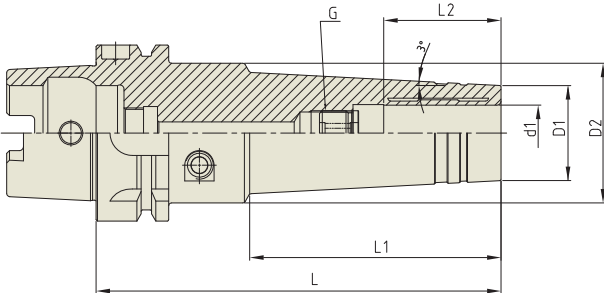

DIN
69893-
HSK

2.5G

25,000
RPM

(at 3D)
≤ 3μm

AD

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
63A	HSK63A-HMC6-145	P2770801	6	20	50	145	90	27	M5×0.8	1.40
	HSK63A-HMC8-145	P2770802	8	22	50	145	90	27	M6×1.0	1.40
	HSK63A-HMC10-145	P2770803	10	24	50	145	90	32	M8×1.0	1.40
	HSK63A-HMC12-145	P2770804	12	25	50	145	90	37	M10×1.0	1.40
	HSK63A-HMC14-145	P2770814	14	27	50	145	90	37	M10×1.0	1.40
	HSK63A-HMC16-145	P2770805	16	32	50	145	90	42	M12×1.0	1.45
	HSK63A-HMC20-145	P2770806	20	34	50	145	90	42	M16×1.0	1.50
100A	HSK100A-HMC6-150	P2770812	6	20	50	150	90	27	M5×0.8	4.50
	HSK100A-HMC8-150	P2770807	8	22	50	150	90	27	M6×1.0	4.50
	HSK100A-HMC10-150	P2770808	10	24	50	150	90	32	M8×1.0	4.50
	HSK100A-HMC12-150	P2770809	12	25	50	150	90	37	M10×1.0	4.50
	HSK100A-HMC14-150	P2770815	14	27	50	150	90	37	M10×1.0	4.50
	HSK100A-HMC16-150	P2770810	16	32	50	150	90	42	M12×1.0	4.70
	HSK100A-HMC20-150	P2770811	20	34	50	150	90	42	M16×1.0	5.00

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK


HC-LS

HYDRAULIC CHUCK (LONG & SLIM)

HYDRAULIK SPANNFUTTER (LANG & SCHLANK)
MANDRIN HYDRAULIQUE (LONGUE ET MINCE)
MANDRINI IDRAULICI (LUNGO E SOTTILE)
PORTAHERRAMIENTAS HIDRAULICO (LARGO Y DELGADO)

HSK-A

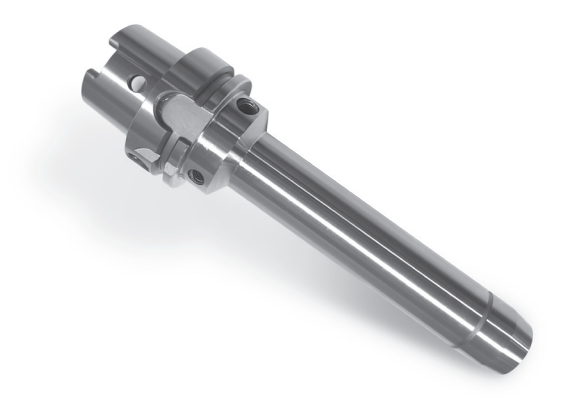

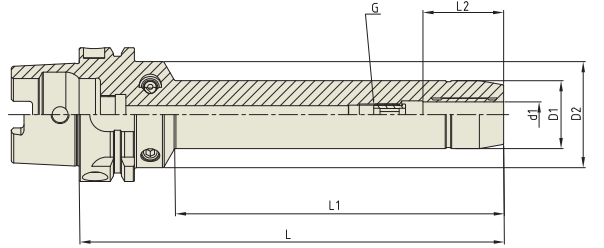

DIN
69893-
HSK

2.5G

25,000
RPM

(at 3D)
≤ 3μm

AD

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
63A	HSK63A-HC6LS-150	P2770469	6	26	50	150	103	25	M5×0.8	1.40
	HSK63A-HC6LS-200	P2770470	6	26	50	200	153	25	M5×0.8	1.60
	HSK63A-HC8LS-150	P2770471	8	28	50	150	104	25	M6×1.0	1.40
	HSK63A-HC8LS-200	P2770472	8	28	50	200	154	25	M6×1.0	1.60
	HSK63A-HC10LS-150	P2770473	10	30	50	150	104	29	M8×1.0	1.50
	HSK63A-HC10LS-200	P2770474	10	30	50	200	154	29	M8×1.0	1.70
	HSK63A-HC12LS-150	P2770475	12	32	50	150	105	34	M10×1.0	1.50
	HSK63A-HC12LS-200	P2770476	12	32	50	200	155	34	M10×1.0	1.80
	HSK63A-HC14LS-150	P2770477	14	34	50	150	105	34.5	M10×1.0	1.60
	HSK63A-HC16LS-150	P2770478	16	38	50	150	106	39	M12×1.0	1.80
	HSK63A-HC16LS-200	P2770479	16	38	50	200	156	39	M12×1.0	2.20
	HSK63A-HC18LS-150	P2770480	18	40	50	150	107	40.5	M12×1.0	1.80
	HSK63A-HC20LS-150	P2770481	20	42	50	150	108	40.5	M16×1.0	1.90
	HSK63A-HC20LS-200	P2770482	20	42	50	200	158	40.5	M16×1.0	2.40

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► Supplied with clamping T-wrench.

► For applicable Hydraulic Chuck collet, please refer to page D291~D294.

D160

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D161

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




SHRINK FIT HOLDER


SFH

SHRINK FIT HOLDER (COOLANT CHANNEL)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

HSK-A

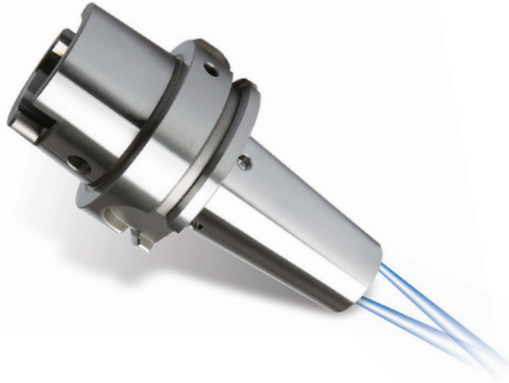

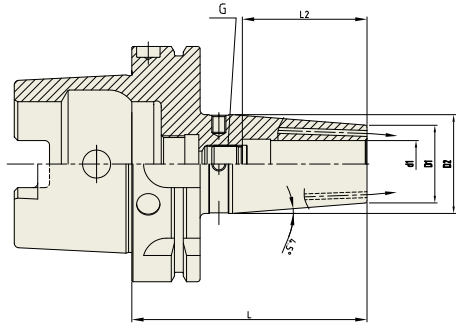

DIN 69893-HSK

2.5G

25,000 RPM

LDI ≤ 3μm

AD+C

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	G	WEIGHT (Kg)
100A	HSK100A-SFH18C-100	P2862043C	18	33	42	100	50	M12x1.0	1.50
	HSK100A-SFH18C-130	P2863420C	18	33	42	130	50	M12x1.0	-
	HSK100A-SFH18C-160	P2862044C	18	33	42	160	50	M12x1.0	2.00
	HSK100A-SFH18C-200	P2863421C	18	33	42	200	50	M12x1.0	-
	HSK100A-SFH20C-100	P2862045C	20	33	42	100	52	M16x1.0	1.50
	HSK100A-SFH20C-130	P2863422C	20	33	42	130	52	M16x1.0	-
	HSK100A-SFH20C-160	P2862046C	20	33	42	160	52	M16x1.0	2.00
	HSK100A-SFH20C-200	P2863423C	20	33	42	200	52	M16x1.0	-
	HSK100A-SFH25C-115	P2862047C	25	44	53	115	58	M16x1.0	1.80
	HSK100A-SFH25C-130	P2863424C	25	44	53	130	58	M16x1.0	-
	HSK100A-SFH25C-160	P2862048C	25	44	53	160	58	M16x1.0	2.30
	HSK100A-SFH25C-200	P2863425C	25	44	53	200	58	M16x1.0	-


► Inch type products are available.

► Supplied without balancing screws.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► With two coolant channel bores.

► Resealable coolant channel type is available upon request.
(Thread for plugging screw & 2 screws)



D170

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




SHRINK FIT HOLDER


SFH

SHRINK FIT HOLDER (REINFORCED)

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

HSK-A

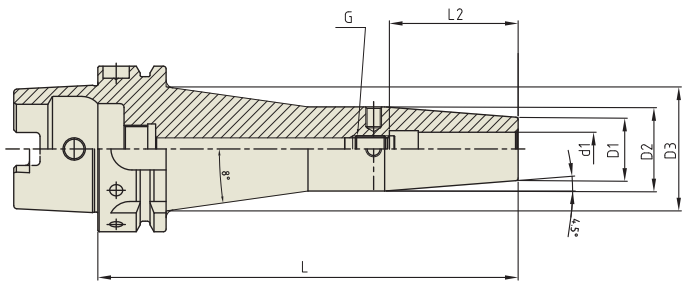

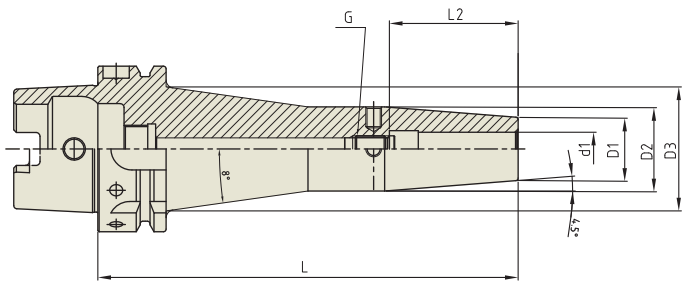

DIN 69893-HSK

AT3

2.5G

25,000 RPM

LDI ≤ 3μm

AD

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	D3	L	L2	G	WEIGHT (Kg)
63A	HSK63A-SFH6 TW-160	P2801501TW	6	21	27	42.2	160	36	M5x0.8	1.36
	HSK63A-SFH8 TW-160	P2801502TW	8	21	27	42.2	160	36	M6x1.0	1.35
	HSK63A-SFH10 TW-160	P2801503TW	10	24	32	47.2	160	42	M8x1.0	1.56
	HSK63A-SFH12 TW-160	P2801504TW	12	24	32	47.2	160	47	M10x1.0	1.55
	HSK63A-SFH14 TW-160	P2801505TW	14	27	34	49.2	160	47	M10x1.0	1.52
	HSK63A-SFH16 TW-160	P2801506TW	16	27	34	49.2	160	50	M12x1.0	1.64
100A	HSK100A-SFH6 TW-160	P2801507TW	6	21	27	41.3	160	36	M5x0.8	2.73
	HSK100A-SFH8 TW-160	P2801508TW	8	21	27	41.3	160	36	M6x1.0	2.72
	HSK100A-SFH10 TW-160	P2801509TW	10	24	32	46.3	160	42	M8x1.0	2.92
	HSK100A-SFH12 TW-160	P2801510TW	12	24	32	46.3	160	47	M10x1.0	2.9
	HSK100A-SFH14 TW-160	P2801511TW	14	27	34	48.3	160	47	M10x1.0	3.05
	HSK100A-SFH16 TW-160	P2801512TW	16	27	34	48.3	160	50	M12x1.0	3.03
	HSK100A-SFH18 TW-160	P2801513TW	18	33	42	56.3	160	50	M12x1.0	3.39
	HSK100A-SFH20 TW-160	P2801514TW	20	33	42	56.3	160	52	M16x1.0	3.36

► Inch type products are available.

► Supplied without balancing screws.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D171

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



ER COLLET
CHUCK


ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-A



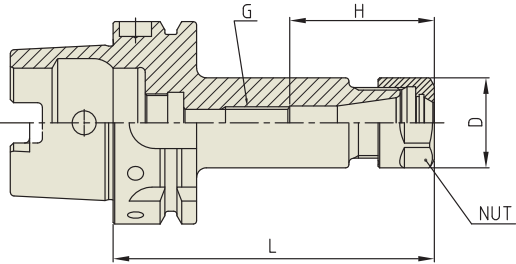

DIN
69893-
HSK

2.5G

25,000
RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50A	HSK50A-ER16-100	P2774938	0.5 - 10.0	100	28	M10	45	ER16	0.70
	HSK50A-ER20-100	P2774939	0.5 - 13.0	100	35	M12	50	ER20	0.90
	HSK50A-ER25-100	P2774940	1.0 - 16.0	100	42	M12	50	ER25	1.20
	HSK50A-ER32-100	P2774941	1.0 - 20.0	100	50	M12	47	ER32	1.50
63A	HSK63A-ER16-100	P2774901	0.5 - 10.0	100	28	M10	45	ER16	1.20
	HSK63A-ER16-130	P2774966	0.5 - 10.0	130	28	M10	45	ER16	-
	HSK63A-ER16-160	P2774953	0.5 - 10.0	160	28	M10	45	ER16	-
	HSK63A-ER20-100	P2774942	0.5 - 13.0	100	35	M12	50	ER20	1.50
	HSK63A-ER20-130	P2774967	0.5 - 13.0	130	35	M12	50	ER20	-
	HSK63A-ER20-160	P2774968	0.5 - 13.0	160	35	M12	50	ER20	-
	HSK63A-ER25-100	P2774902	1.0 - 16.0	100	42	M12	57	ER25	1.80
	HSK63A-ER25-130	P2774969	1.0 - 16.0	130	42	M12	57	ER25	-
	HSK63A-ER25-160	P2774970	1.0 - 16.0	160	42	M12	57	ER25	-
	HSK63A-ER32-100	P2774903	1.0 - 20.0	100	50	M12	60	ER32	2.00
	HSK63A-ER32-130	P2774971	1.0 - 20.0	130	50	M12	60	ER32	-
	HSK63A-ER32-160	P2774954	1.0 - 20.0	160	50	M12	60	ER32	-
	HSK63A-ER40-120	P2774904	2.0 - 30.0	120	63	M12	69	ER40	2.30
	HSK63A-ER40-160	P2774972	2.0 - 30.0	160	63	M12	69	ER40	-

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

► NEXT PAGE

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



ER COLLET
CHUCK


ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-A



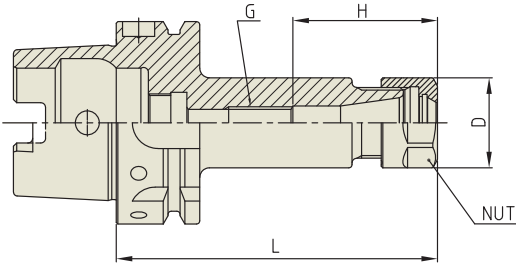

DIN
69893-
HSK

2.5G

25,000
RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
80A	HSK80A-ER16-100	P2774943	0.5 - 10.0	100	28	M10	45	ER16	1.77
	HSK80A-ER25-100	P2774944	1.0 - 16.0	100	42	M12	47	ER20	1.79
	HSK80A-ER32-100	P2774945	1.0 - 20.0	100	50	M12	53	ER25	1.95
100A	HSK100A-ER16-100	P2774905	0.5 - 10.0	100	28	M10	45	ER16	2.60
	HSK100A-ER16-130	P2774973	0.5 - 10.0	130	28	M10	45	ER16	-
	HSK100A-ER16-160	P2774998	0.5 - 10.0	160	28	M10	45	ER16	-
	HSK100A-ER20-100	P2774946	0.5 - 13.0	100	35	M12	50	ER20	2.70
	HSK100A-ER20-130	P2774974	0.5 - 13.0	130	35	M12	50	ER20	-
	HSK100A-ER20-160	P2774999	0.5 - 13.0	160	35	M12	50	ER20	-
	HSK100A-ER25-100	P2774906	1.0 - 16.0	100	42	M12	57	ER25	2.90
	HSK100A-ER25-130	P2774975	1.0 - 16.0	130	42	M12	57	ER25	-
	HSK100A-ER25-160	P2775000	1.0 - 16.0	160	42	M12	57	ER25	-
	HSK100A-ER32-100	P2774907	1.0 - 20.0	100	50	M12	65	ER32	3.10
	HSK100A-ER32-130	P2774976	1.0 - 20.0	130	50	M12	65	ER32	-
	HSK100A-ER32-160	P2774977	1.0 - 20.0	160	50	M12	65	ER32	-
	HSK100A-ER40-120	P2774947	1.0 - 20.0	120	63	M12	69	ER40	3.30
	HSK100A-ER40-160	P2774978	1.0 - 20.0	160	63	M12	69	ER40	-

► Inch type products are available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS



ER COLLET CHUCK


ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-A



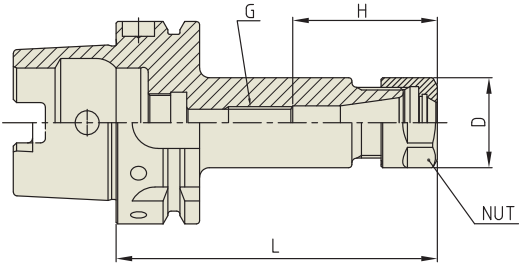

DIN 69893-HSK

6.3G

15,000 RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50A	HSK50A-ER16-100	P2771927	0.5 - 10.0	100	28	M10	45	ER16	0.70
	HSK50A-ER20-100	P2771928	0.5 - 13.0	100	35	M12	50	ER20	0.90
	HSK50A-ER25-100	P2771929	1.0 - 16.0	100	42	M12	50	ER25	1.20
	HSK50A-ER32-100	P2771930	1.0 - 20.0	100	50	M12	65	ER32	1.50
63A	HSK63A-ER16-100	P2564001	0.5 - 10.0	100	28	M10	45	ER16	1.20
	HSK63A-ER16-130	P2782007	0.5 - 10.0	130	28	M10	45	ER16	-
	HSK63A-ER16-160	P2771997	0.5 - 10.0	160	28	M10	45	ER16	-
	HSK63A-ER20-100	P2564005	0.5 - 13.0	100	35	M12	50	ER20	1.50
	HSK63A-ER20-130	P2782008	0.5 - 13.0	130	35	M12	50	ER20	-
	HSK63A-ER20-160	P2782009	0.5 - 13.0	160	35	M12	50	ER20	-
	HSK63A-ER25-100	P2564002	1.0 - 16.0	100	42	M12	57	ER25	1.80
	HSK63A-ER25-130	P2782010	1.0 - 16.0	130	42	M12	57	ER25	-
	HSK63A-ER25-160	P2782011	1.0 - 16.0	160	42	M12	57	ER25	-
	HSK63A-ER32-100	P2564003	1.0 - 20.0	100	50	M12	60	ER32	2.00
	HSK63A-ER32-130	P2782012	1.0 - 20.0	130	50	M12	60	ER32	-
	HSK63A-ER32-160	P2771998	1.0 - 20.0	160	50	M12	60	ER32	-
	HSK63A-ER40-120	P2564004	2.0 - 30.0	120	63	M12	75	ER40	2.30
	HSK63A-ER40-160	P2782013	2.0 - 30.0	160	63	M12	75	ER40	-
	HSK80A-ER16-100	P2771932	0.5 - 10.0	100	28	M10	45	ER16	1.77
80A	HSK80A-ER25-100	P2771933	1.0 - 16.0	100	42	M12	47	ER20	1.79
	HSK80A-ER32-100	P2771934	1.0 - 20.0	100	50	M12	53	ER25	1.95
	HSK100A-ER16-100	P2564011	0.5 - 10.0	100	28	M10	45	ER16	2.60
100A	HSK100A-ER16-130	P2782014	0.5 - 10.0	130	28	M10	45	ER16	-
	HSK100A-ER16-160	P2782001	0.5 - 10.0	160	28	M10	45	ER16	-
	HSK100A-ER20-100	P2564015	0.5 - 13.0	100	35	M12	50	ER20	2.70
	HSK100A-ER25-100	P2564012	1.0 - 16.0	100	42	M12	57	ER25	2.90
	HSK100A-ER25-130	P2782015	1.0 - 16.0	130	42	M12	57	ER25	-
	HSK100A-ER25-160	P2782003	1.0 - 16.0	160	42	M12	57	ER25	-
	HSK100A-ER32-100	P2564013	1.0 - 20.0	100	50	M12	65	ER32	3.10
	HSK100A-ER32-130	P2782016	1.0 - 20.0	130	50	M12	65	ER32	-
	HSK100A-ER32-160	P2782017	1.0 - 20.0	160	50	M12	65	ER32	-
	HSK100A-ER40-120	P2564014	2.0 - 30.0	120	63	M12	69	ER40	3.30
	HSK100A-ER40-160	P2782018	2.0 - 30.0	160	63	M12	69	ER40	-

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D180

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




ER COLLET CHUCK


ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-E

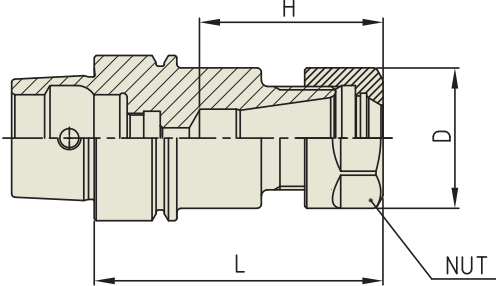

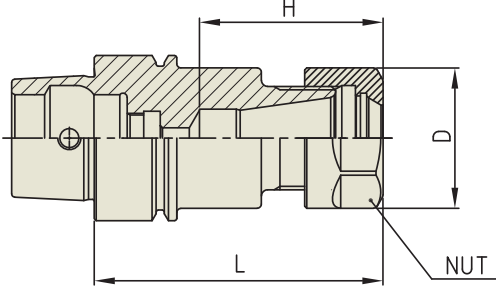

DIN 69893-HSK

2.5G

25,000 RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
25E	HSK25E-ER11-40	P2774921	0.5 - 7.0	40	19	26.6	ER11	0.15
	HSK25E-ER16-50	P2774922	0.5 - 10.0	50	28	34.6	ER16	0.18
32E	HSK32E-ER11-50	P2774923	0.5 - 7.0	50	19	23.6	ER11	0.18
	HSK32E-ER16-60	P2774924	0.5 - 10.0	60	28	41.0	ER16	0.21
40E	HSK40E-ER11-60	P2774925	0.5 - 7.0	60	19	40.0	ER11	0.40
	HSK40E-ER16-60	P2774926	0.5 - 10.0	60	28	41.0	ER16	0.50
	HSK40E-ER20-70	P2774927	0.5 - 13.0	70	34	50.0	ER20	0.80

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

DIN 69893-HSK

6.3G

15,000 RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
25E	HSK25E-ER11-40	P2771935	0.5 - 7.0	40	19	26.6	ER11	0.16
	HSK25E-ER16-50	P2771936	0.5 - 10.0	50	28	34.6	ER16	0.16
32E	HSK32E-ER11-50	P2771918	0.5 - 7.0	50	19	23.6	ER11	0.18
	HSK32E-ER16-60	P2771919	0.5 - 10.0	60	28	41.0	ER16	0.21
40E	HSK40E-ER11-60	P2771920	0.5 - 7.0	60	19	40.0	ER11	0.40
	HSK40E-ER16-60	P2771921	0.5 - 10.0	60	28	41.0	ER16	0.50
	HSK40E-ER20-70	P2771922	0.5 - 13.0	70	34	50.0	ER20	0.80

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D181

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




ER COLLET CHUCK

ER

ER COLLET CHUCK (SLIM)

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-A

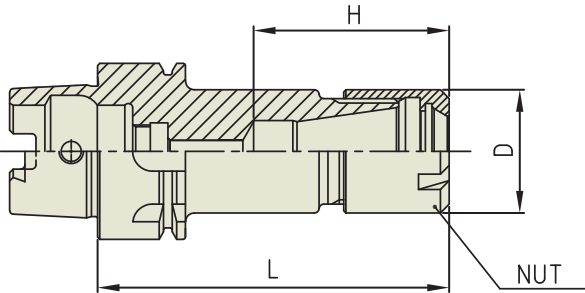

DIN 69893-HSK

2.5G

25,000 RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
32A	HSK32A-ER8M-40	P2774913	0.5 - 5.0	40	12	21.0	ER8M / ER8	0.18
	HSK32A-ER11M-40	P2774914	0.5 - 7.0	40	16	23.0	ER11M / ER11	0.18
	HSK32A-ER16M-60	P2774915	0.5 - 10.0	60	22	38.0	ER16M / ER16	0.21
	HSK32A-ER20M-60	P2774916	0.5 - 13.0	60	28	38.0	ER20M / ER20	0.21
40A	HSK40A-ER11M-75	P2774917	0.5 - 7.0	75	16	29.5	ER11M / ER11	0.40
	HSK40A-ER16M-80	P2774918	0.5 - 10.0	80	22	38.0	ER16M / ER16	0.50
	HSK40A-ER20M-80	P2774919	0.5 - 13.0	80	28	44.5	ER20M / ER20	0.70
	HSK40A-ER25M-80	P2774920	1.0 - 16.0	80	35	52.0	ER25M / ER25	0.80

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

DIN 69893-HSK

6.3G

15,000 RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
32A	HSK32A-ER8M-40	P2771910	0.5 - 5.0	40	12	21.0	ER8M / ER8	0.15
	HSK32A-ER11M-40	P2771911	0.5 - 7.0	40	16	23.0	ER11M / ER11	0.15
	HSK32A-ER16M-60	P2771912	0.5 - 10.0	60	22	38.0	ER16M / ER16	0.21
	HSK32A-ER20M-60	P2771913	0.5 - 13.0	60	28	39.5	ER20M / ER20	0.20
40A	HSK40A-ER11M-75	P2771914	0.5 - 7.0	75	16	29.5	ER11M / ER11	0.40
	HSK40A-ER16M-80	P2771915	0.5 - 10.0	80	22	38.0	ER16M / ER16	0.50
	HSK40A-ER20M-80	P2771916	0.5 - 13.0	80	28	44.5	ER20M / ER20	0.70
	HSK40A-ER25M-80	P2771917	1.0 - 16.0	80	35	52.0	ER25M / ER25	0.80

► Inch type products are available.
► For applicable ER collet, please refer to page D296~D304.
► For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

D182

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




ER COLLET CHUCK

ER

ER COLLET CHUCK (SLIM)

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-A

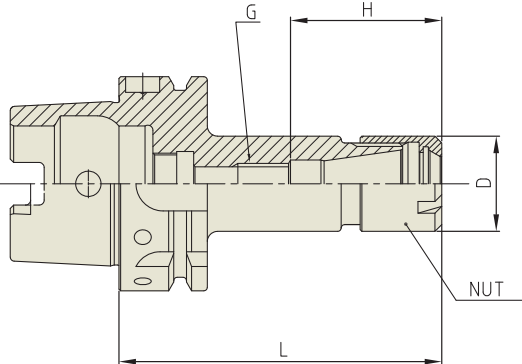

DIN 69893-HSK

2.5G

25,000 RPM

AD

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50A	HSK50A-ER11M-75	P2775002	0.5 ~ 7.0	75.00	16	M6	29.5	ER11M / ER11	0.30
	HSK50A-ER16M-85	P2775003	0.5 ~ 10.0	85.00	22	M10	38.0	ER16M / ER16	0.40
	HSK50A-ER20M-90	P2775004	0.5 ~ 13.0	90.00	28	M12	44.5	ER20M / ER20	0.80
	HSK50A-ER25M-105	P2775005	1.0 ~ 16.0	105.00	35	M12	52.0	ER25M / ER25	1.20
63A	HSK63A-ER11M-75	P2775006	0.5 ~ 7.0	75	16	M6	29.5	ER11M / ER11	0.80
	HSK63A-ER11M-100	P2774963	0.5 ~ 7.0	100	16	M6	29.5	ER11M / ER11	-
	HSK63A-ER11M-130	P2802758	0.5 ~ 7.0	130	16	M6	29.5	ER11M / ER11	-
	HSK63A-ER11M-160	P2802759	0.5 ~ 7.0	160	16	M6	29.5	ER11M / ER11	-
	HSK63A-ER16M-85	P2775007	0.5 ~ 10.0	85	22	M10	38.0	ER16M / ER16	1.00
	HSK63A-ER16M-100	P2802760	0.5 ~ 10.0	100	22	M10	38.0	ER16M / ER16	-
	HSK63A-ER16M-130	P2802761	0.5 ~ 10.0	130	22	M10	38.0	ER16M / ER16	-
	HSK63A-ER16M-160	P2802762	0.5 ~ 10.0	160	22	M10	38.0	ER16M / ER16	-
	HSK63A-ER20M-95	P2775008	0.5 ~ 13.0	95	28	M12	44.5	ER20M / ER20	1.20
	HSK63A-ER20M-130	P2802763	0.5 ~ 13.0	130	28	M12	44.5	ER20M / ER20	-
	HSK63A-ER20M-160	P2802764	0.5 ~ 13.0	160	28	M12	44.5	ER20M / ER20	-
	HSK63A-ER25M-105	P2775009	1.0 ~ 16.0	105	35	M12	52.0	ER25M / ER25	1.40
100A	HSK100A-ER11M-85	P2775010	0.5 ~ 7.0	85	16	M6	29.5	ER11M / ER11	2.40
	HSK100A-ER16M-95	P2775011	0.5 ~ 10.0	95	22	M10	38.0	ER16M / ER16	2.70
	HSK100A-ER20M-100	P2775012	0.5 ~ 13.0	100	28	M12	44.5	ER20M / ER20	3.00
	HSK100A-ER25M-120	P2775013	1.0 ~ 16.0	120	35	M12	52.0	ER25M / ER25	3.20

► Inch type products are available.
► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.
► For applicable ER collet, please refer to page D296~D304.
► For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

D183

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK (SLIM)

SPANN FUTTER-ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-A

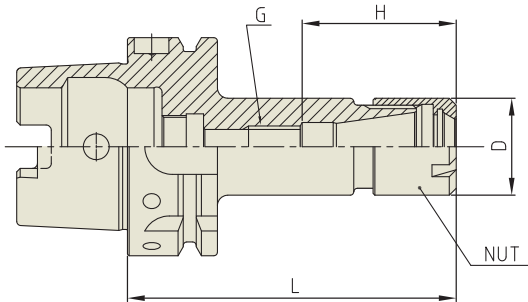

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	G	H	NUT / COLLET	WEIGHT (Kg)
50A	HSK50A-ER11M-75	P2802501	0.5 - 7.0	75	16	M6	29.5	ER11M / ER11	0.30
	HSK50A-ER16M-85	P2802502	0.5 - 10.0	85	22	M10	38.0	ER16M / ER16	0.40
	HSK50A-ER20M-90	P2802503	0.5 - 13.0	90	28	M12	44.5	ER20M / ER20	0.80
	HSK50A-ER25M-105	P2802504	1.0 - 16.0	105	35	M12	52.0	ER25M / ER25	1.20
63A	HSK63A-ER11M-75	P2802505	0.5 - 7.0	75	16	M6	29.5	ER11M / ER11	0.80
	HSK63A-ER11M-100	P2771999	0.5 - 7.0	100	16	M6	29.5	ER11M / ER11	-
	HSK63A-ER11M-130	P2802767	0.5 - 7.0	130	16	M6	29.5	ER11M / ER11	-
	HSK63A-ER11M-160	P2802768	0.5 - 7.0	160	16	M6	29.5	ER11M / ER11	-
	HSK63A-ER16M-85	P2802506	0.5 - 10.0	85	22	M10	38.0	ER16M / ER16	1.00
	HSK63A-ER16M-100	P2802769	0.5 - 10.0	100	22	M10	38.0	ER16M / ER16	-
	HSK63A-ER16M-130	P2802770	0.5 - 10.0	130	22	M10	38.0	ER16M / ER16	-
	HSK63A-ER16M-160	P2802771	0.5 - 10.0	160	22	M10	38.0	ER16M / ER16	-
	HSK63A-ER20M-95	P2802507	0.5 - 13.0	95	28	M12	44.5	ER20M / ER20	1.20
	HSK63A-ER20M-130	P2802772	0.5 - 13.0	130	28	M12	44.5	ER20M / ER20	-
	HSK63A-ER20M-160	P2802773	0.5 - 13.0	160	28	M12	44.5	ER20M / ER20	-
	HSK63A-ER25M-105	P2802508	1.0 - 16.0	105	35	M12	52.0	ER25M / ER25	1.40
	HSK63A-ER25M-130	P2802774	1.0 - 16.0	130	35	M12	52.0	ER25M / ER25	-
	HSK63A-ER25M-160	P2802775	1.0 - 16.0	160	35	M12	52.0	ER25M / ER25	-
	HSK100A-ER11M-85	P2802509	0.5 - 7.0	85	16	M6	29.5	ER11M / ER11	2.40
	HSK100A-ER16M-95	P2802510	0.5 - 10.0	95	22	M10	38.0	ER16M / ER16	2.70
100A	HSK100A-ER20M-100	P2802511	0.5 - 13.0	100	28	M12	44.5	ER20M / ER20	3.00
	HSK100A-ER25M-120	P2802512	1.0 - 16.0	120	35	M12	52.0	ER25M / ER25	3.20

- Inch type products are available.
- For applicable ER collet, please refer to page D296~D304.
- For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK (SLIM)

SPANN FUTTER-ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

HSK-E

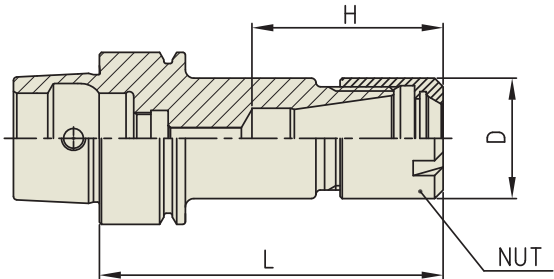

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
25E	HSK25E-ER8M-35	P2774928	0.5 - 5.0	35	12	21.0	ER8M / ER8	0.15
	HSK25E-ER11M-40	P2774929	0.5 - 7.0	40	16	24.5	ER11M / ER11	0.18
32E	HSK32E-ER8M-40	P2774930	0.5 - 5.0	40	12	21.0	ER8M / ER8	0.15
	HSK32E-ER11M-40	P2774931	0.5 - 7.0	40	16	23.0	ER11M / ER11	0.18
	HSK32E-ER16M-60	P2774932	0.5 - 10.0	60	22	38.0	ER16M / ER16	0.21
40E	HSK32E-ER20M-60	P2774933	0.5 - 13.0	60	28	39.5	ER20M / ER20	0.21
	HSK40E-ER11M-75	P2774934	0.5 - 7.0	75	16	29.5	ER11M / ER11	0.40
	HSK40E-ER16M-80	P2774935	0.5 - 10.0	80	22	38.0	ER16M / ER16	0.50
	HSK40E-ER20M-80	P2774936	0.5 - 13.0	80	28	44.5	ER20M / ER20	0.70
	HSK40E-ER25M-80	P2774937	1.0 - 16.0	80	35	52.0	ER25M / ER25	0.80

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.



Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
25E	HSK25E-ER8M-35	P2771937	0.5 - 5.0	35	12	21.0	ER8M / ER8	0.10
	HSK25E-ER11M-40	P2771938	0.5 - 7.0	40	16	24.5	ER11M / ER11	0.10
32E	HSK32E-ER8M-40	P2774948	0.5 - 5.0	40	12	21.0	ER8M / ER8	0.15
	HSK32E-ER11M-40	P2774949	0.5 - 7.0	40	16	23.0	ER11M / ER11	0.15
	HSK32E-ER16M-60	P2774950	0.5 - 10.0	60	22	38.0	ER16M / ER16	0.21
	HSK32E-ER20M-60	P2774951	0.5 - 13.0	60	28	39.5	ER20M / ER20	0.20
40E	HSK40E-ER11M-75	P2771904	0.5 - 7.0	75	16	29.5	ER11M / ER11	0.40
	HSK40E-ER16M-80	P2771905	0.5 - 10.0	80	22	38.0	ER16M / ER16	0.50
	HSK40E-ER20M-80	P2771906	0.5 - 13.0	80	28	44.5	ER20M / ER20	0.70
	HSK40E-ER25M-80	P2771907	1.0 - 16.0	80	35	52.0	ER25M / ER25	0.80

- Inch type products are available.
- For applicable ER collet, please refer to page D296~D304.
- For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

Y/G

END MILL
HOLDER

EMH

END MILL HOLDER

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL

HSK-A



FIG.1





FIG.2

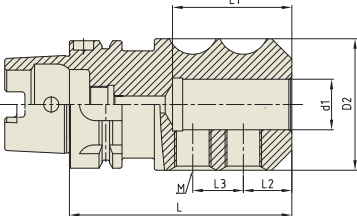

DIN
69893-
HSK

2.5G

25,000
RPM

AD

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40A	HSK40A-EMH6-60	P2775522	6	25	60	38	18	-	M6	1	0.30
	HSK40A-EMH8-60	P2775523	8	28	60	38	18	-	M8	1	0.30
	HSK40A-EMH10-60	P2775524	10	35	60	42	20	-	M10	1	0.30
	HSK40A-EMH12-70	P2775525	12	42	70	47	22.5	-	M12	1	0.40
	HSK40A-EMH14-70	P2775526	14	44	70	47	22.5	-	M12	1	0.40
	HSK40A-EMH16-80	P2775527	16	48	80	50	24	-	M14	1	0.60
50A	HSK50A-EMH6-65	P2775528	6	25	65	38	18	-	M6	1	0.70
	HSK50A-EMH8-65	P2775529	8	28	65	38	18	-	M8	1	0.80
	HSK50A-EMH10-65	P2775530	10	35	65	42	20	-	M10	1	0.80
	HSK50A-EMH12-80	P2775531	12	42	80	47	22.5	-	M12	1	1.20
	HSK50A-EMH14-80	P2775532	14	44	80	47	22.5	-	M12	1	1.30
	HSK50A-EMH16-80	P2775533	16	48	80	50	24	-	M14	1	1.30
	HSK50A-EMH18-80	P2775534	18	50	80	50	24	-	M14	1	1.40
	HSK50A-EMH20-80	P2775535	20	52	80	52	25	-	M16	1	1.50
63A	HSK63A-EMH6-65	P2775501	6	25	65	35	18	-	M6	1	0.80
	HSK63A-EMH8-65	P2775502	8	28	65	38	18	-	M8	1	0.80
	HSK63A-EMH10-65	P2775503	10	35	65	42	20	-	M10	1	0.90
	HSK63A-EMH12-80	P2775504	12	42	80	47	22.5	-	M12	1	1.10
	HSK63A-EMH14-80	P2775505	14	44	80	47	22.5	-	M12	1	1.20
	HSK63A-EMH16-80	P2775506	16	48	80	50	24	-	M14	1	1.30
	HSK63A-EMH18-80	P2775507	18	50	80	50	24	-	M14	1	1.40
	HSK63A-EMH20-80	P2775508	20	52	80	52	25	-	M16	1	1.50
	HSK63A-EMH25-110	P2775509	25	65	110	60	24	25	M18	2	2.30
	HSK63A-EMH32-110	P2775510	32	72	110	64	24	28	M20	2	2.60
100A	HSK100A-EMH6-80	P2775511	6	25	80	35	18	-	M6	1	0.80
	HSK100A-EMH8-80	P2775512	8	28	80	35	18	-	M8	1	0.80
	HSK100A-EMH10-80	P2775513	10	35	80	39	20	-	M10	1	0.90
	HSK100A-EMH12-80	P2775514	12	42	80	47	22.5	-	M12	1	1.10
	HSK100A-EMH14-80	P2775515	14	44	80	47	22.5	-	M12	1	1.20
	HSK100A-EMH16-100	P2775516	16	48	100	50	24	-	M14	1	1.30
	HSK100A-EMH18-100	P2775517	18	50	100	50	24	-	M14	1	1.40
	HSK100A-EMH20-100	P2775518	20	52	100	52	25	-	M16	1	1.50
	HSK100A-EMH25-100	P2775519	25	65	100	60	24	25	M18	2	2.30
	HSK100A-EMH32-100	P2775520	32	72	100	64	24	28	M20	2	2.60
	HSK100A-EMH40-120	P2775521	40	80	120	74	30	32	M20	2	2.60

► Inch type products are available.

► Standard End Mill Holder is for a cutting tool with weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D186

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G

YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

Y/G

END MILL
HOLDER

EMH

END MILL HOLDER (COOLANT CHANNEL)

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL

HSK-A



FIG.1





FIG.2



DIN
69893-
HSK

2.5G

25,000
RPM

AD+C

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D2	L	L1	L2	L3	M	FIG.	WEIGHT (Kg)
40A	HSK40A-EMH6C-60	P2777222	6	25	60	38	18	-	M6	1	0.30
	HSK40A-EMH8C-60	P2777223	8	28	60	38	18	-	M8	1	0.30
	HSK40A-EMH10C-60	P2777224	10	35	60	42	20	-	M10	1	0.30
	HSK40A-EMH12C-70	P2777225	12	42	70	47	22.5	-	M12	1	0.40
	HSK40A-EMH14C-70	P2777226	14	44	70	47	22.5	-	M12	1	0.40
	HSK40A-EMH16C-80	P2777227	16	48	80	50	24	-	M14	1	0.60
50A	HSK50A-EMH6C-65	P2777228	6	25	65	38	18	-	M6	1	0.70
	HSK50A-EMH8C-65	P2777229	8	28	65	38	18	-	M8	1	0.80
	HSK50A-EMH10C-65	P2777230	10	35	65	42	20	-	M10	1	0.80
	HSK50A-EMH12C-80	P2777231	12	42	80	47	22.5	-	M12	1	1.20
	HSK50A-EMH14C-80	P2777232	14	44	80	47	22.5	-	M12	1	1.30
	HSK50A-EMH16C-80	P2777233	16	48	80	50	24	-	M14	1	1.30
	HSK50A-EMH18C-80	P2777234	18	50	80	50	24	-	M14	1	1.40
	HSK50A-EMH20C-80	P2777235	20	52	80	52	25	-	M16	1	1.50
	HSK63A-EMH6C-65	P2777201	6	25	65	35	18	-	M6	1	0.80
	HSK63A-EMH8C-65	P2777202	8	28	65	40	18	-	M8	1	0.80
63A	HSK63A-EMH10C-65	P2777203	10	35	65	40.5	20	-	M10	1	0.90
	HSK63A-EMH12C-80	P2777204	12	42	80	49	22.5	-	M12	1	1.10
	HSK63A-EMH14C-80	P2777206	14	44	80	49	22.5	-	M12	1	1.20
	HSK63A-EMH16C-80	P2777205	16	48	80	52	24	-	M14	1	1.30
	HSK63A-EMH18C-80	P2777207	18	50	80	52	24	-	M14	1	1.40
	HSK63A-EMH20C-80	P2777208	20	52	80	53	25	-	M16	1	1.50
	HSK63A-EMH25C-110	P2777209	25	65	110	59	24	25	M18	2	2.30
	HSK63A-EMH32C-110	P2777210	32	72	110	63	24	28	M20	2	2.60
	HSK100A-EMH6C-80	P2777211	6	25	80	35	18	-	M6	1	0.80
	HSK100A-EMH8C-80	P2777212	8	28	80	35	18	-	M8	1	0.80
100A	HSK100A-EMH10C-80	P2777213	10	35	80	35.5	20	-	M10	1	0.90
	HSK100A-EMH12C-80	P2777214	12	42	80	49	22.5	-	M12	1	1.10
	HSK100A-EMH14C-80	P2777215	14	44	80	49	22.5	-	M12	1	1.20
	HSK100A-EMH16C-100	P2777216	16	48	100	52	24	-	M14	1	1.30
	HSK100A-EMH18C-100	P2777217	18	50	100	52	24	-	M14	1	1.40
	HSK100A-EMH20C-100	P2777218	20	52	100	53	25	-	M16	1	1.50
	HSK100A-EMH25C-100	P2777219	25	65	100	59	24	25	M18	2	2.30
	HSK100A-EMH32C-100	P2777220	32	72	100	63	24	28	M20	2	2.60
	HSK100A-EMH40C-120	P2777221	40	80	120	73	30	32	M20	2	2.60

► Inch type products are available.

► Standard End Mill Holder is for a cutting tool with weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D187

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS



SHELL MILL ARBOR


SMA

SHELL MILL ARBOR (COOLANT CHANNEL & LARGE FACE)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS

HSK-A



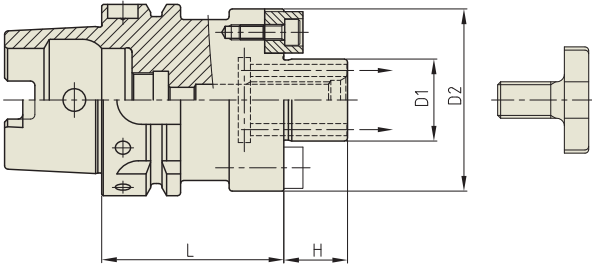

DIN 69893-HSK

6.3G

15,000 RPM

AD+C

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
63A	HSK63A-SMA16CE-50	P2803301CE	16	38	50	17	M8x16L	0.86
	HSK63A-SMA16CE-100	P2803302CE	16	38	100	17	M8x16L	1.29
	HSK63A-SMA16CE-145	P2803303CE	16	38	145	17	M8x16L	1.68
	HSK63A-SMA22CE-50	P2803304CE	22	48	50	19	M10x18L	1.02
	HSK63A-SMA22CE-100	P2803305CE	22	48	100	19	M10x18L	1.71
	HSK63A-SMA22CE-160	P2803306CE	22	48	160	19	M10x18L	2.54
	HSK63A-SMA27CE-60	P2803307CE	27	60	60	21	M12x22L	1.39
	HSK63A-SMA27CE-100	P2803308CE	27	60	100	21	M12x22L	2.25
	HSK63A-SMA27CE-160	P2803309CE	27	60	160	21	M12x22L	3.54
	HSK63A-SMA32CE-60	P2803310CE	32	78	60	24	M16x26L	1.70
	HSK63A-SMA32CE-100	P2803311CE	32	78	100	24	M16x26L	3.40
100A	HSK63A-SMA40CE-60	P2803312CE	40	89	60	27	M20x30L	1.99
	HSK100A-SMA16CE-100	P2803313CE	16	38	100	17	M8x16L	2.63
	HSK100A-SMA22CE-50	P2803314CE	22	48	50	19	M10x18L	2.34
	HSK100A-SMA22CE-100	P2803315CE	22	48	100	19	M10x18L	3.02
	HSK100A-SMA22CE-160	P2803316CE	22	48	160	19	M10x18L	3.85
	HSK100A-SMA27CE-50	P2803317CE	27	60	50	21	M12x22L	2.54
	HSK100A-SMA27CE-100	P2803318CE	27	60	100	21	M12x22L	3.60
	HSK100A-SMA27CE-160	P2803319CE	27	60	160	21	M12x22L	4.90
	HSK100A-SMA32CE-50	P2803320CE	32	78	50	24	M16x26L	2.90
	HSK100A-SMA32CE-100	P2803321CE	32	78	100	24	M16x26L	4.68
	HSK100A-SMA32CE-160	P2803322CE	32	78	160	24	M16x26L	6.86
	HSK100A-SMA40CE-60	P2803323CE	40	89	60	27	M20x30L	3.68
	HSK100A-SMA40CE-100	P2803324CE	40	89	100	27	M20x30L	5.51
	HSK100A-SMA40CE-160	P2803325CE	40	89	160	27	M20x30L	8.32

► Inch type products are available.

► With "Coolant Through" by coolant channels.

► For parts, please refer to page D311.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




SHELL MILL ARBOR


SMF

SHELL MILL ARBOR (FLANGE MOUNTING)

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS

HSK-A

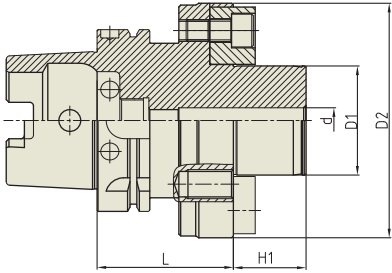



DIN 69893-HSK

6.3G

15,000 RPM

AD

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d	D1	D2	D3	L	H1	M (TAP)	DRIVE KEY & BOLT	WEIGHT (Kg)
100A	HSK100A-SMF60-75	P2524025	14	60	129	101.6	75	40	4-M16	25.4 x 25.4 x 31.5, M12-25L	-

► Inch type products are available.

D192

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D193

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




COMBI-SHELL MILL ARBOR


CMA

COMBI-SHELL MILL ARBOR

KOMBI-AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES COMBINÉS
MANDRINO PORTA FRESE
PORTA FRESAS COMBINADO

HSK-A

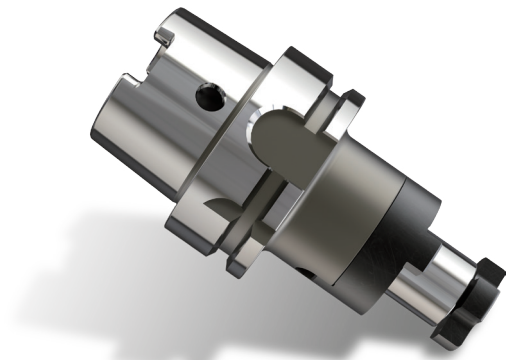

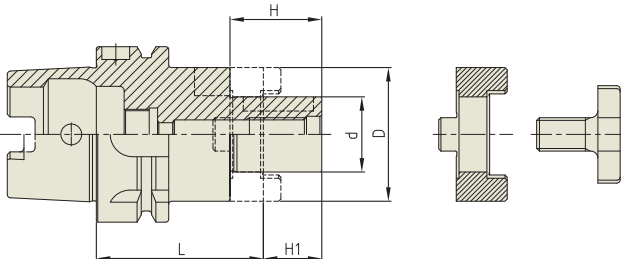

DIN 69893-HSK

6.3G

15,000 RPM

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	d	L	D	H1	H	WEIGHT (Kg)
50A	HSK50A-CMA16-50	P2562006	16	50	32	17	27	0.56
	HSK50A-CMA22-50	P2562007	22	50	40	19	31	0.66
	HSK50A-CMA27-65	P2562008	27	65	48	21	33	0.96
	HSK50A-CMA32-65	P2562009	32	65	58	24	38	1.15
63A	HSK63A-CMA16-60	P2562001	16	60	32	17	27	0.88
	HSK63A-CMA22-60	P2562002	22	60	40	19	31	1.02
	HSK63A-CMA27-60	P2562003	27	60	48	21	33	1.20
	HSK63A-CMA32-60	P2562004	32	60	53	24	38	1.43
	HSK63A-CMA40-70	P2562005	40	70	70	27	41	1.93
100A	HSK100A-CMA16-60	P2562011	16	60	32	17	27	2.22
	HSK100A-CMA22-60	P2562012	22	60	40	19	31	2.34
	HSK100A-CMA27-60	P2562013	27	60	48	21	33	2.56
	HSK100A-CMA32-60	P2562014	32	60	58	24	38	2.69
	HSK100A-CMA40-70	P2562015	40	70	70	27	41	3.39
	HSK100A-CMA50-80	P2562010	50	80	90	30	46	4.50

► Inch type products are available.

► For parts, please refer to page D312.

D194

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions



YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS



POWER MILLING CHUCK


C

HIGH-SPEED POWER MILLING CHUCK

HOCHGESCHWINDIGKEITS FRÄSERFUTTER
MANDRIN PORTE FRAISE À GRANDE VITESSE
MANDRINI PORTA FRESA PER ALTA VELOCITÀ
PORTAHERRAMIENTAS PARA FRESADO DE ALTA VELOCIDAD

HSK-A



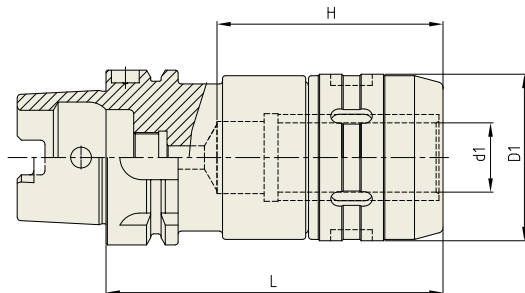

DIN 69893-HSK

6.3G

20,000 RPM

AD

Unit : mm							
TAPER No.	MODEL No.	EDP No.	d1	D1	L	H	WEIGHT (Kg)
50A	HSK50A-C20-100HS	P2773102	20	54	100	70	1.30
63A	HSK63A-C20-105HS	P2562016	20	54	105	70	1.50
	HSK63A-C25-120HS	P2773103	25	62	120	80	2.20
	HSK63A-C32-130HS	P2562017	32	72	130	100	2.70
100A	HSK100A-C20-110HS	P2773104	20	54	110	70	3.50
	HSK100A-C25-130HS	P2773105	25	62	130	80	3.80
	HSK100A-C32-135HS	P2773101	32	72	135	100	4.20
	HSK100A-C42-135HS	P2773106	42	72	135	100	5.30

► Inch type products are available.

► Balancing Grade is adjusted on Basic holder only without Clamping Cap.

► For applicable collet and spanner, please refer to the page D314.

D195

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions



YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



SYNCHRO
TAPPING CHUCK


SYTC

SYNCHRO TAPPING CHUCK (QUICK CHANGE TYPE)

SYNCHRO GEWINDESCHNEID-SCHNELLWECHSELFUTTER
SYNCHRO TARAUDER À CHANGEMENT RAPIDE
SINCRO MANDRINO PER MASCHIARE
SINCRO PORTAMACHOS DE CAMBIO RAPIDO

HSK-A



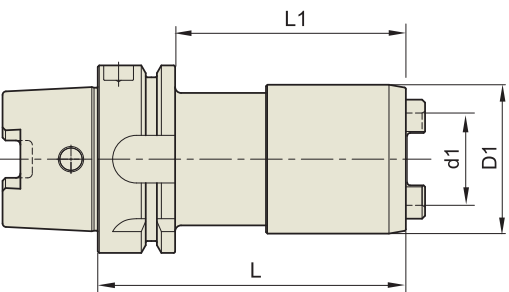

DIN
69893-
HSK



Unit : mm									
TAPER No.	MODEL No.	EDP No.	TAP SIZE	TAP ADAPTOR	d1	D1	L	L1	WEIGHT (Kg)
32A	HSK32A-SYTC12-75	P2774314	M3-M12	TCS12	19	36	75	55	0.32
50A	HSK50A-SYTC12-72	P2774315	M3-M12	TCS12	19	36	72	46	0.54
	HSK50A-SYTC20-91	P2774316	M6-M24	TCS24	31	50	91	65	0.70
63A	HSK63A-SYTC12-75	P2774301	M3-M12	TCS12	19	36	75	49	0.82
	HSK63A-SYTC12-80	P2774302	M3-M12	TCS12	19	36	80	54	0.85
	HSK63A-SYTC12-120	P2774303	M3-M12	TCS12	19	36	120	94	1.08
	HSK63A-SYTC12-152	P2774304	M3-M12	TCS12	19	36	152	126	1.27
	HSK63A-SYTC12-180	P2774305	M3-M12	TCS12	19	36	180	154	1.44
	HSK63A-SYTC20-89	P2774306	M6-M24	TCS24	31	50	89	63	0.84
	HSK63A-SYTC33-121	P2774307	M18-M38	TCS38	48	74	121	95	1.45
	HSK100A-SYTC12-75	P2774308	M3-M12	TCS12	19	36	75	43	2.20
	HSK100A-SYTC12-160	P2774309	M3-M12	TCS12	19	36	160	131	2.60
100A	HSK100A-SYTC20-94	P2774310	M6-M24	TCS24	31	50	94	65	2.39
	HSK100A-SYTC20-160	P2774311	M6-M24	TCS24	31	50	160	131	2.99
	HSK100A-SYTC33-127	P2774312	M18-M38	TCS38	48	74	127	98	3.11
	HSK100A-SYTC33-160	P2774313	M18-M38	TCS38	48	74	160	131	4.03

► Feature :

- Compensation for synchronization errors to extend tap life and to improve thread quality.

- To compensate for pitch tolerances of taps.

- For machine with synchronized spindle.

► For applicable Tap Adaptor, please refer to page D318~D319.

D202

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ONE STEP
TAPPING CHUCK


OTC

ONE STEP TAPPING CHUCK

GEWINDE-SCHNELLWECHSELFUTTER
MANDRIN DE TARAUDAGE À CHANGEMENT RAPIDE
PORTAMASCHI A CAMBIO RAPIDO
MANDRINO DE CAMBIO RÁPIDO CON ROSCA

HSK-A

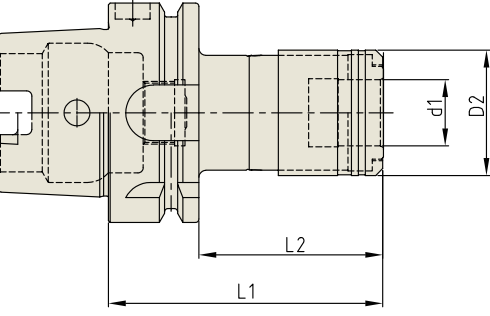

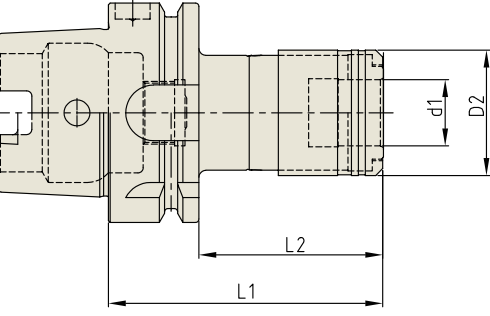

DIN
69893-
HSK



Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D2	L1	L2	LENGTH COMPENSATION		WEIGHT (Kg)
							Compression	Tension	
63A	HSK63A-OTC-M3-M12-77	P2802401	19	36	77	51	7.5	7.5	1.10
	HSK63A-OTC-M8-M20-110	P2802402	31	53	110	84	12.5	12.5	1.50
	HSK63A-OTC-M14-M36-155	P2802403	48	78	155	129	20	20	3.30
100A	HSK100A-OTC-M3-M12-85.5	P2802404	19	36	85.5	56.5	7.5	7.5	3.00
	HSK100A-OTC-M8-M20-119.5	P2802405	31	53	119.5	90.5	12.5	12.5	3.30
	HSK100A-OTC-M14-M36-161	P2802406	48	78	161	132	20	20	5.20

► For applicable Tap Adaptor, please refer to page D318~D319.

D203

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

									Unit : mm
TAPER No.	MODEL No.	EDP No.	D	D1	D2	L	L1	NUT / COLLET	WEIGHT (Kg)
50A	HSK50A-TER16-125	P2774107	28	41	45	125	93.4	ER16	1.20
	HSK50A-TER16-150	P2774108	28	41	45	150	118.4	ER16	1.30
63A	HSK63A-TER16-125	P2774101	28	41	45	125	93.4	ER16	1.70
	HSK63A-TER16-150	P2774102	28	41	45	150	118.4	ER16	1.85
	HSK63A-TER32-150	P2774103	50	58	63	150	112	ER32	2.10
	HSK63A-TER32-180	P2774109	50	58	63	180	142	ER32	2.30
100A	HSK100A-TER16-130	P2774104	28	41	45	130	98.4	ER16	4.00
	HSK100A-TER16-150	P2774105	28	41	45	150	118.4	ER16	4.20
	HSK100A-TER32-150	P2774106	50	58	63	150	112	ER32	4.40
	HSK100A-TER32-180	P2774110	50	58	63	180	142	ER32	4.60

- ▶ Inch type products are available.
- ▶ ER collet of page D296~D302 and Tap ER collet of page D303~D304 are applicable.

										Unit : mm
TAPER No.	MODEL No.	EDP No.	TAP SIZE	TAP ADAPTOR	LENGTH COMPENSATION		d1	D1	L	WEIGHT (Kg)
					Compression	Tension				
50A	HSK50A-TC12-120	P2774506	M3-M12	TCS12	5	15	19	45	120	0.80
63A	HSK63A-TC12-120	P2774501	M3-M12	TCS12	5	15	19	45	120	1.00
	HSK63A-TC12-150	P2774507	M3-M12	TCS12	5	15	19	45	150	1.70
	HSK63A-TC24-142	P2774502	M6-M24	TCS24	5	20	31	63	142	2.40
	HSK63A-TC24-172	P2774508	M6-M24	TCS24	5	20	31	63	172	2.70
	HSK100A-TC12-130	P2774503	M3-M12	TCS12	5	15	19	45	130	4.30
100A	HSK100A-TC12-175	P2774509	M3-M12	TCS12	5	15	19	45	175	4.80
	HSK100A-TC12-220	P2774510	M3-M12	TCS12	5	15	19	45	220	5.30
	HSK100A-TC24-142	P2774504	M6-M24	TCS24	5	20	31	63	142	5.20
	HSK100A-TC24-187	P2774511	M6-M24	TCS24	5	20	31	63	187	6.60
	HSK100A-TC38-200	P2774505	M18-M38	TCS38	10	25	48	98	200	8.00

- For applicable Tap Adaptor, please refer to page D318~D319.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




BLANK
BAR

BL

BLANK BAR

BOHRSTANGENROHLING
EBAUCHE DE BARRES D ALÉSAGE
BARRA ALESATRICE GREZZA
PIEZA EN BRUTO PARA BARRAS DE MANDRINAR

HSK-A

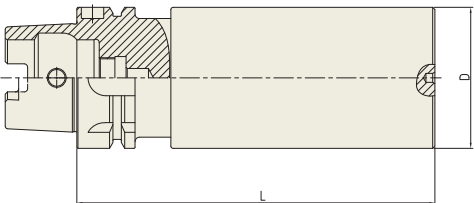

DIN
69871-
SK



TAPER No.	MODEL No.	EDP No.	D	L	WEIGHT(Kg)
63A	HSK63A-BL63-160	P2779198	63	160	3.91
100A	HSK100A-BL97-250	P2779199	97	250	17.70

Unit : mm




TEST
BAR

TB

TEST BAR

KONTROLLDORN
MANDRIN DE CONTRÔLE
MANDRINO DI CONTROLLO
MANDRIL DE CONTROL

HSK-A



DIN
69871-
SK



TAPER No.	MODEL No.	EDP No.	D	L	WEIGHT(Kg)
63A	HSK63A-TB40-300	P2802303	40	300	2.90
100A	HSK100A-TB50-300	P2802304	50	300	6.17

Unit : mm

YG-1 TOOLING SYSTEM

STRAIGHT



SHRINK FIT HOLDER - EXTENSION

ER COLLET CHUCK

SK SLIM CHUCK

SYNCHRO TAPPING CHUCK

ONE STEP TAPPING CHUCK

TAPPING CHUCK

NC DRILL CHUCK (KEYLESS TYPE)

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS


SHRINK FIT HOLDER

SFH

SHRINK FIT HOLDER - EXTENSION

SCHRUMPFUTTER (VERLÄGERUNG)
MANDRIN DE FRETAGE (EXTENSION)
MADRINI PER CALLETAMENTO A CALDO (PROLUNGHE)
PORTAHERRAMIENTAS DE COMPRESION POR CALOR (EXTENSION)

STRAIGHT

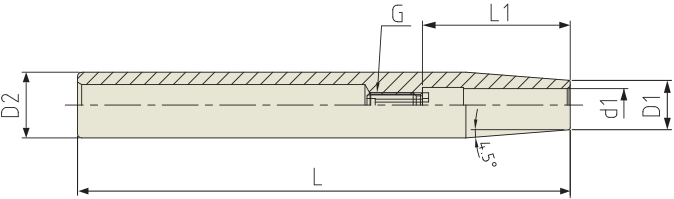

Unit : mm									
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	G	WEIGHT (Kg)
12	ST12-SFH3-120	P2767010	3	8	12	120	10	-	0.05
	ST12-SFH4-120	P2767015	4	8	12	120	12	-	0.05
	ST12-SFH5-120	P2771701	5	10	12	120	15	-	0.08
	ST12-SFH6-120	P2771709	6	10	12	120	36	M5×0.8	0.07
16	ST16-SFH3-120	P2767110	3	10	16	120	10	-	0.14
	ST16-SFH4-120	P2767115	4	10	16	120	12	-	0.14
	ST16-SFH5-120	P2771702	5	10	16	120	15	-	0.14
	ST16-SFH6-120	P2771710	6	10	16	120	36	M5×0.8	0.14
	ST16-SFH8-120	P2771711	8	12	16	120	36	M6×1.0	0.12
20	ST20-SFH3-120	P2771703	3	10	20	120	10	-	0.21
	ST20-SFH4-120	P2771704	4	10	20	120	12	-	0.21
	ST20-SFH5-120	P2771705	5	10	20	120	15	-	0.20
	ST20-SFH6-120	P2771712	6	10	20	120	36	M5×0.8	0.20
	ST20-SFH8-120	P2771713	8	12	20	120	36	M6×1.0	0.19
	ST20-SFH10-120	P2771714	10	14	20	120	43	M8×1.0	0.20
	ST20-SFH12-120	P2771715	12	16	20	120	48	M10×1.0	0.18

► Inch type products are available.

D214

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS


SHRINK FIT HOLDER

SFH

SHRINK FIT HOLDER - EXTENSION

SCHRUMPFUTTER (VERLÄGERUNG)
MANDRIN DE FRETAGE (EXTENSION)
MADRINI PER CALLETAMENTO A CALDO (PROLUNGHE)
PORTAHERRAMIENTAS DE COMPRESION POR CALOR (EXTENSION)

STRAIGHT

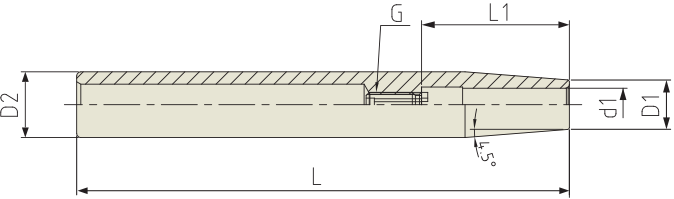

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	G	WEIGHT (Kg)	
12	ST12-SFH3-160	P2767020	3	8	12	160	10	-	0.07	
	ST12-SFH4-160	P2767025	4	8	12	160	12	-	0.07	
	ST12-SFH5-160	P2771706	5	10	12	160	15	-	0.10	
	ST12-SFH6-160	P2767030	6	10	12	160	36	M5×0.8	0.13	
16	ST16-SFH3-160	P2767120	3	10	16	160	10	-	0.20	
	ST16-SFH4-160	P2767125	4	10	16	160	12	-	0.20	
	ST16-SFH5-160	P2771707	5	10	16	160	15	-	0.20	
	ST16-SFH6-160	P2767130	6	10	16	160	36	M5×0.8	0.19	
	ST16-SFH8-160	P2767135	8	12	16	160	36	M6×1.0	0.16	
	ST20-SFH3-160	P2767210	3	10	20	160	10	-	0.30	
20	ST20-SFH4-160	P2767215	4	10	20	160	12	-	0.30	
	ST20-SFH5-160	P2771708	5	10	20	160	15	-	0.29	
	ST20-SFH6-160	P2767220	6	10	20	160	36	M5×0.8	0.29	
	ST20-SFH8-160	P2767225	8	12	20	160	36	M6×1.0	0.27	
	ST20-SFH10-160	P2767230	10	14	20	160	43	M8×1.0	0.27	
	ST20-SFH12-160	P2767235	12	16	20	160	48	M10×1.0	0.23	
	25	ST25-SFH3-160	P2771716	3	10	25	160	10	-	0.41
		ST25-SFH4-160	P2771717	4	10	25	160	12	-	0.39
ST25-SFH5-160		P2771718	5	15	25	160	15	-	0.50	
ST25-SFH6-160		P2771719	6	20	25	160	36	M5×0.8	0.55	
ST25-SFH8-160		P2771720	8	20	25	160	36	M6×1.0	0.51	
ST25-SFH10-160		P2771721	10	20	25	160	43	M8×1.0	0.50	
ST25-SFH12-160		P2771722	12	20	25	160	48	M10×1.0	0.44	
ST25-SFH14-160		P2771723	14	20	25	160	48	M10×1.0	0.40	
32	ST25-SFH16-160	P2771724	16	22	25	160	51	M12×1.0	0.39	
	ST32-SFH6-160	P2771725	6	20	32	160	36	M5×0.8	0.92	
	ST32-SFH8-160	P2771726	8	20	32	160	36	M6×1.0	0.88	
	ST32-SFH10-160	P2771727	10	24	32	160	43	M8×1.0	0.83	
	ST32-SFH12-160	P2771728	12	24	32	160	48	M10×1.0	0.78	
	ST32-SFH14-160	P2771729	14	27	32	160	48	M10×1.0	0.78	
	ST32-SFH16-160	P2771730	16	27	32	160	51	M12×1.0	0.76	
	ST32-SFH18-160	P2771731	18	27	32	160	51	M12×1.0	0.63	
ST32-SFH20-160	P2771732	20	27	32	160	53	M16×1.0	0.60		

► Inch type products are available.

D215

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

Y/G

ER COLLET
CHUCK

ER

ER COLLET CHUCK (STANDARD)

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

STRAIGHT-K

Unit : mm										
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D1	D2	L1	L2	H	NUT / COLLET	WEIGHT (Kg)
16	K16-ER11-100	P2772201	0.5 - 7.0	16	19	100	32	27	ER11	0.15
	K16-ER16-100	P2772219	0.5 - 10.0	16	28	100	36	32.6	ER16	0.18
20	K20-ER16-100	P2772202	0.5 - 10.0	20	28	100	36	35.6	ER16	0.25
	K20-ER20-100	P2772203	0.5 - 13.0	20	34	100	40	38	ER20	0.29
	K20-ER25-100	P2772220	1.0 - 16.0	20	42	100	50	44	ER25	0.35
25	K25-ER20-100	P2772221	0.5 - 13.0	25	34	100	40	71.6	ER20	0.40
	K25-ER25-100	P2772204	1.0 - 16.0	25	42	100	50	43.1	ER25	0.45
32	K32-ER16-100	P2772222	0.5 - 10.0	32	28	100	36	-	ER16	0.50
	K32-ER20-100	P2772223	0.5 - 13.0	32	34	100	40	71.6	ER20	0.66
	K32-ER25-100	P2772224	1.0 - 16.0	32	42	100	50	71.1	ER25	0.75
	K32-ER32-100	P2772225	1.0 - 20.0	32	50	100	58	78	ER32	1.00

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D216

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

Y/G YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

Y/G

ER COLLET
CHUCK

ER

EXTENSION ER COLLET CHUCK (SLIM)

VERLÄNGERUNG SPANN FUTTER (SCHLANK)
EXTENSION MANDRIN À PINCES (MINCE)
PROLUNGHE MANDRINO PORTA PINZE (SOTTILE)
EXTENSION PORTAPINZAS (DELGADO)

STRAIGHT-K

Unit : mm										
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D1	D2	L1	L2	H	NUT / COLLET	WEIGHT (Kg)
12	K12-ER8M-70	P2772205	0.5 - 5.0	12	12	70	25.0	38.0	ER8M / ER8	0.10
	K12-ER8M-100	P2780001	0.5 - 5.0	12	12	100	25.0	38.0	ER8M / ER8	0.13
	K12-ER8M-150	P2780002	0.5 - 5.0	12	12	150	25.0	38.0	ER8M / ER8	0.17
	K12-ER8M-200	P2780003	0.5 - 5.0	12	12	200	25.0	38.0	ER8M / ER8	0.21
	K12-ER8M-250	P2780004	0.5 - 5.0	12	12	250	25.0	38.0	ER8M / ER8	0.26
	K12-ER8M-300	P2780005	0.5 - 5.0	12	12	300	25.0	38.0	ER8M / ER8	0.3
16	K16-ER11M-100	P2780006	0.5 - 7.0	16	16	100	32.0	29.5	ER11M / ER11	0.18
	K16-ER11M-140	P2772206	0.5 - 7.0	16	16	140	32.0	29.5	ER11M / ER11	0.23
	K16-ER11M-200	P2780007	0.5 - 7.0	16	16	200	32.0	29.5	ER11M / ER11	0.37
	K16-ER11M-250	P2780008	0.5 - 7.0	16	16	250	32.0	29.5	ER11M / ER11	0.45
	K16-ER11M-300	P2780009	0.5 - 7.0	16	16	300	32.0	29.5	ER11M / ER11	0.52
	K16-ER16M-100	P2780010	0.5 - 10.0	16	22	100	36.0	38.0	ER16M / ER16	0.18
	K16-ER16M-140	P2780011	0.5 - 10.0	16	22	140	36.0	38.0	ER16M / ER16	0.23
	K16-ER16M-200	P2780012	0.5 - 10.0	16	22	200	36.0	38.0	ER16M / ER16	0.37
	K16-ER16M-250	P2780013	0.5 - 10.0	16	22	250	36.0	38.0	ER16M / ER16	0.45
	K16-ER16M-300	P2780014	0.5 - 10.0	16	22	300	36.0	38.0	ER16M / ER16	0.52
20	K20-ER16M-100	P2780015	0.5 - 10.0	20	22	100	41.0	-	ER16M / ER16	0.22
	K20-ER16M-140	P2772207	0.5 - 10.0	20	22	140	41.0	-	ER16M / ER16	0.28
	K20-ER16M-200	P2780016	0.5 - 10.0	20	22	200	41.0	-	ER16M / ER16	0.54
	K20-ER16M-250	P2780017	0.5 - 10.0	20	22	250	41.0	-	ER16M / ER16	0.66
	K20-ER16M-300	P2780018	0.5 - 10.0	20	22	300	41.0	-	ER16M / ER16	0.78
	K20-ER20M-100	P2780019	0.5 - 13.0	20	28	100	41.0	41.5	ER20M / ER20	0.25
	K20-ER20M-140	P2772208	0.5 - 13.0	20	28	140	41.0	41.5	ER20M / ER20	0.32
	K20-ER20M-200	P2780020	0.5 - 13.0	20	28	200	41.0	41.5	ER20M / ER20	0.54
	K20-ER20M-250	P2780021	0.5 - 13.0	20	28	250	41.0	41.5	ER20M / ER20	0.66
	K20-ER20M-300	P2780022	0.5 - 13.0	20	28	300	41.0	41.5	ER20M / ER20	0.78

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

► NEXT PAGE

Y/G YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D217

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

EXTENSION ER COLLET CHUCK (SLIM)

VERLÄNGERUNG SPANN FUTTER (SCHLANK)
EXTENSION MANDRIN À PINCES (MINCE)
PROLUNGHE MANDRINO PORTA PINZE (SOTTILE)
EXTENSION PORTAPINZAS (DELGADO)

STRAIGHT-K

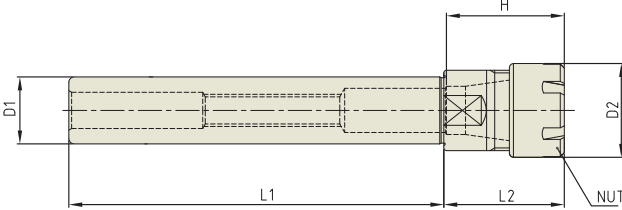

Unit : mm										
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D1	D2	L1	L2	H	NUT / COLLET	WEIGHT (Kg)
25	K25-ER16M-100	P2780023	0.5 - 10.0	25	22	100	41.0	-	ER16M / ER16	0.38
	K25-ER16M-140	P2772209	0.5 - 10.0	25	22	140	41.0	-	ER16M / ER16	0.50
	K25-ER16M-200	P2780024	0.5 - 10.0	25	22	200	41.0	-	ER16M / ER16	0.80
	K25-ER16M-250	P2780025	0.5 - 10.0	25	22	250	41.0	-	ER16M / ER16	1.00
	K25-ER16M-300	P2780026	0.5 - 10.0	25	22	300	41.0	-	ER16M / ER16	1.19
	K25-ER20M-140	P2772210	0.5 - 13.0	25	28	140	41.0	79.0	ER20M / ER20	0.52
	K25-ER20M-200	P2780027	0.5 - 13.0	25	28	200	41.0	79.0	ER20M / ER20	0.84
	K25-ER20M-250	P2780028	0.5 - 13.0	25	28	250	41.0	79.0	ER20M / ER20	1.03
	K25-ER20M-300	P2780029	0.5 - 13.0	25	28	300	41.0	79.0	ER20M / ER20	1.23
	K25-ER25M-140	P2772211	0.5 - 16.0	25	35	140	45.0	82.0	ER25M / ER25	0.50
	K25-ER25M-200	P2780030	0.5 - 16.0	25	35	200	45.0	82.0	ER25M / ER25	0.84
	K25-ER25M-250	P2780031	0.5 - 16.0	25	35	250	45.0	82.0	ER25M / ER25	1.04
32	K25-ER25M-300	P2780032	0.5 - 16.0	25	35	300	45.0	82.0	ER25M / ER25	1.23
	K32-ER20M-150	P2780033	0.5 - 13.0	32	28	150	41.0	41.0	ER20M / ER20	0.84
	K32-ER20M-200	P2780034	0.5 - 13.0	32	28	200	41.0	41.0	ER20M / ER20	1.31
	K32-ER20M-250	P2780035	0.5 - 13.0	32	28	250	41.0	41.0	ER20M / ER20	1.62
	K32-ER20M-300	P2780036	0.5 - 13.0	32	28	300	41.0	41.0	ER20M / ER20	1.94
	K32-ER25M-150	P2780037	0.5 - 16.0	32	35	150	41.0	48.0	ER25M / ER25	1.01
	K32-ER25M-200	P2780038	0.5 - 16.0	32	35	200	41.0	48.0	ER25M / ER25	1.32
	K32-ER25M-250	P2780039	0.5 - 16.0	32	35	250	41.0	48.0	ER25M / ER25	1.64
	K32-ER25M-300	P2780040	0.5 - 16.0	32	35	300	41.0	48.0	ER25M / ER25	1.95
	K32-ER25M-350	P2780041	1.0 - 16.0	32	35	350	41.0	41.5	ER25M / ER25	2.27

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

TOOLING
SYSTEM



ER COLLET
CHUCK

ERT

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

TENSION ER CHUCK (FOR TAPPING)

SPANNUNG SPANN FUTTER - ER - FÜR GEWINDESCHNEID
TENSION MANDRIN À PINCES - ER - POUR TARAUDER
TENSIONAMENTO MANDRINO PORTA PINZE - ER - PER MASCHIARE
TENSIÓN PORTAPINZAS - ER - PARA HILO

STRAIGHT-K

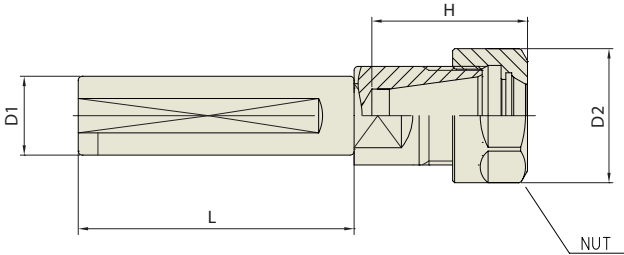

Unit : mm									
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D1	D2	L	H	NUT / COLLET	WEIGHT (Kg)
20	K20-ERT16-70	P2772212	0.5 - 10.0	20	28	70	31.7	ER16	0.40
25	K25-ERT16-80	P2772213	0.5 - 10.0	25	28	80	31.7	ER16	0.45
	K25-ERT20-80	P2772214	0.5 - 13.0	25	34	80	35.5	ER20	0.50
32	K32-ERT16-80	P2772215	0.5 - 10.0	32	28	80	31.7	ER16	0.70
	K32-ERT20-80	P2772216	0.5 - 13.0	32	34	80	35.5	ER20	0.80
	K32-ERT25-80	P2772217	1.0 - 16.0	32	42	80	42	ER25	1.00
	K32-ERT32-80	P2772218	1.0 - 20.0	32	50	80	48	ER32	1.20

► Inch type products are available.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING
SYSTEM



ER COLLET
CHUCK

ER

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

ER COLLET CHUCK (NC-FOR CNC LATHE)

SPANN FUTTER- ER - FÜR CNC DREHBANK
MANDRIN À PINCES - ER - POUR CNC TOUR
MANDRINO PORTA PINZE - ER - PER CNC TORNIO
PORTAPINZAS - ER - PARA CNC TORNO

STRAIGHT

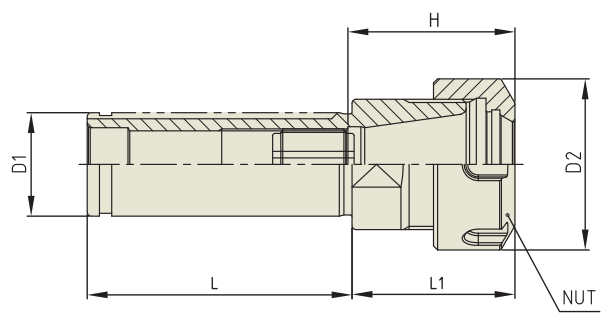

TOOLING
SYSTEM




SK SLIM
CHUCK

SKA

SK SLIM CHUCK

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO

STRAIGHT-K

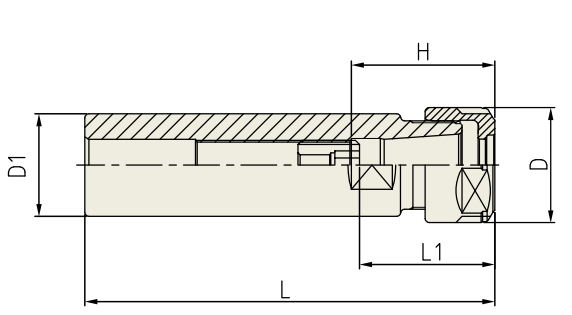

Unit : mm										
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D1	D2	L	L1	H	NUT / COLLET	WEIGHT (Kg)
25	NC25-ER11	P2772310	0.5 - 7.0	25	19	65	32	28.6	ER11	0.30
	NC25-ER16	P2772311	0.5 - 10.0	25	28	65	36	35.6	ER16	0.45
	NC25-ER20	P2772301	0.5 - 13.0	25	34	65	40	44.5	ER20	0.50
	NC25-ER25	P2772302	1.0 - 16.0	25	42	65	40	41	ER25	0.55
32	NC32-ER20	P2772303	0.5 - 13.0	32	34	60	39.5	44.5	ER20	0.60
	NC32-ER25	P2772304	1.0 - 16.0	32	42	70	40.0	41	ER25	0.70
	NC32-ER32	P2772305	1.0 - 20.0	32	50	70	45.0	47	ER32	0.75
40	NC40-ER32	P2772306	1.0 - 20.0	40	50	75	45.0	60	ER32	1.25
	NC40-ER40	P2772307	2.0 - 30.0	40	63	75	55.0	53	ER40	1.30

- Inch type products are available.
- For applicable ER collet, please refer to page D296~D304.
- For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

Unit : mm										
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	L1	D	D1	H	COLLET	WEIGHT (Kg)
20	K20-SKA06-100	P2773532	1.8 - 6.0	100	21 - 35	20	20	31	SKC6	0.20
	K20-SKA06-140	P2773533	1.8 - 6.0	140	21 - 35	20	20	31	SKC6	0.30
	K20-SKA10-100	P2773534	1.75 - 10.0	100	30 - 50	28	20	35	SKC10	0.20
	K20-SKA10-140	P2773535	1.75 - 10.0	140	30 - 50	28	20	35	SKC10	0.30
25	K25-SKA06-100	P2773536	1.8 - 6.0	100	21 - 35	20	25	31	SKC6	0.30
	K25-SKA06-140	P2773537	1.8 - 6.0	140	21 - 35	20	25	31	SKC6	0.50
	K25-SKA10-100	P2773538	1.75 - 10.0	100	30 - 50	28	25	35	SKC10	0.30
	K25-SKA10-150	P2773539	1.75 - 10.0	150	30 - 50	28	25	35	SKC10	0.50
	K25-SKA13-100	P2773540	2.75 - 13.0	100	31 - 65	33	25	43.6	SKC13	0.40
	K25-SKA13-150	P2773541	2.75 - 13.0	150	31 - 65	33	25	43.6	SKC13	0.60
32	K32-SKA10-100	P2773542	1.75 - 10.0	100	30 - 50	28	32	35	SKC10	0.50
	K32-SKA10-150	P2773543	1.75 - 10.0	150	30 - 50	28	32	35	SKC10	0.70
	K32-SKA13-100	P2773544	2.75 - 13.0	100	31 - 65	33	32	43.6	SKC13	1.00
	K32-SKA13-150	P2773545	2.75 - 13.0	150	31 - 65	33	32	43.6	SKC13	1.20
	K32-SKA16-100	P2773546	2.75 - 16.0	100	40 - 70	40	32	52	SKC16	1.00
	K32-SKA16-150	P2773547	2.75 - 16.0	150	40 - 70	40	32	52	SKC16	1.20
	K32-SKA20-100	P2773548	3.5 - 20.0	100	47 - 80	48.5	32	59.6	SKC20	1.10
	K32-SKA20-150	P2773549	3.5 - 20.0	150	47 - 80	48.5	32	59.6	SKC20	1.30

- Inch type products are available.
- For applicable Collet, Nut and Spanner, please refer to page D314~D317.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SYNCHRO
TAPPING CHUCK


SYTER

SYNCHRO TAPPING CHUCK (ER TYPE)

SYNCHRO GEWINDESCHNEIDFUTTER (ER)
SYNCHRO TARAUDER (ER)
SINCRO MANDRINI PER MASCHIATURA (ER)
SINCRO PORTAMACHOS (ER)

STRAIGHT-KW

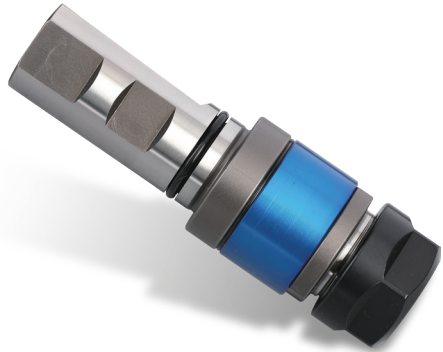

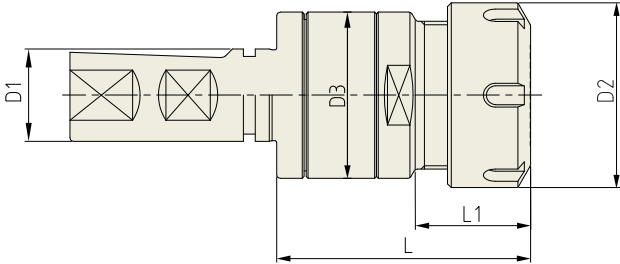

Unit : mm										
MODEL No.	EDP No.	TAP SIZE	NUT/ COLLET	D1	D2	D3	L	L1	Tension/ Compression	WEIGHT (Kg)
KW20-SYTER16	P2773901	M3-M16	ER20	20	34	34	58	26	±0.2	0.33
KW25-SYTER16	P2773902	M3-M16	ER20	25	34	34	61	27	±0.2	0.44
KW25-SYTER27	P2773903	M4-M27	ER32	25	50	45	69	31	±0.2	0.60

► Feature :

- Compensation for synchronization errors to extend tap life and to improve thread quality.

- To compensate for pitch tolerances of taps.

- For machine with synchronized spindle.

► Inch type products are available.

► ER collet of page D296~D302, and Tap ER collet of page D303~D304 are applicable.

D222

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



SYNCHRO
TAPPING CHUCK


SYTC

SYNCHRO TAPPING CHUCK (QUICK CHANGE TYPE)

SYNCHRO GEWINDESCHNEID-SCHNELLWECHSELFUTTER
SYNCHRO TARAUDER À CHANGEMENT RAPIDE
SINCRO MANDRINO PER MASCHIARE
SINCRO PORTAMACHOS DE CAMBIO RAPIDO

STRAIGHT-KW



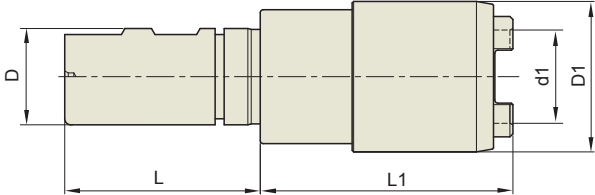

Unit : mm										
TAPER No.	MODEL No.	EDP No.	TAP SIZE	TAP ADAPTOR	D	d1	D1	L	L1	WEIGHT (Kg)
20	KW20-SYTC12-46	P2774401	M3-M12	TCS12	20	19	36	50	46	0.28
	KW20-SYTC12-107.5	P2774406	M3-M12	TCS12	20	19	36	50	107.5	0.65
25	KW25-SYTC12-46	P2774402	M3-M12	TCS12	25	19	36	56	46	0.37
	KW25-SYTC20-74	P2774403	M6-M24	TCS24	25	31	50	56	74	0.69
	KW25-SYTC33-107.5	P2774404	M18-M38	TCS38	25	48	74	56	107.5	1.32
32	KW32-SYTC12-74	P2774405	M3-M12	TCS12	32	31	50	60	74	0.71

► Feature :

- Compensation for synchronization errors to extend tap life and to improve thread quality.

- To compensate for pitch tolerances of taps.

- For machine with synchronized spindle.

► Inch type products are available.

► For applicable Tap Adaptor, please refer to page D318~D319.

D222

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

D223

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




NC DRILL
CHUCK

NPU

NC DRILL CHUCK (KEYLESS TYPE)

NC - BOHRFUTTER
MANDRIN DE PERÇAGE NC
NC MANDRINI PORTA PUNTE
PORTABROCAS PARA BROCAS NC

STRAIGHT-K

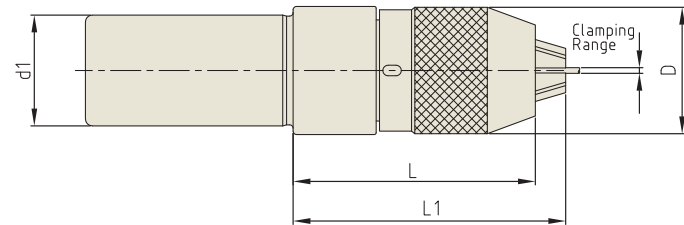

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	d1	L (Min.)	L1 (Max.)	WEIGHT (Kg)
32	K32-NPU8-75	P2776021	0.3 - 8.0	36.5	32	75	80.7	0.70
	K32-NPU13-100	P2775252	0.3 - 13.0	50.4	32	100	110	1.50
42	K42-NPU8-70	P2775253	0.3 - 8.0	36.5	42	70	75.7	0.80
	K42-NPU13-100	P2775254	0.3 - 13.0	50.4	42	100	110	1.60

- ▶ Inch type products are available.
- ▶ Supplied with hook wrench. (Size NPU 8 : 8S, NPU 13 : 13S)

YG-1 TOOLING SYSTEM

ISO, NT
MTA/MTB,
GOST



ISO

SHRINK FIT HOLDER
ER COLLET CHUCK
SK SLIM CHUCK
COMBI-SHELL MILL ARBOR

NT

MORSE TAPER ARBOR
FACE MILL ARBOR

MTA

ER COLLET CHUCK
POWER MILLING CHUCK
TAPPING CHUCK
FACE MILL ARBOR

MTB

HYDRAULIC CHUCK
ER COLLET CHUCK
POWER MILLING CHUCK

GOST

ER COLLET CHUCK
END MILL HOLDER
SHELL MILL ARBOR
MORSE TAPER ARBOR

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



SHRINK FIT
HOLDER

SFH

SHRINK FIT HOLDER

SCHRUMPFUTTER
MANDRIN DE FRETAGE
MADRINI PER CALLETAMENTO A CALDO
PORTAHERRAMIENTAS DE COMPRESION POR CALOR

ISO 25



ISO 25



2.5G







FIG.1


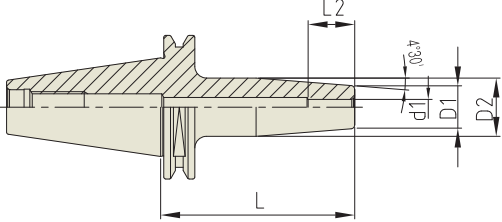


FIG.2

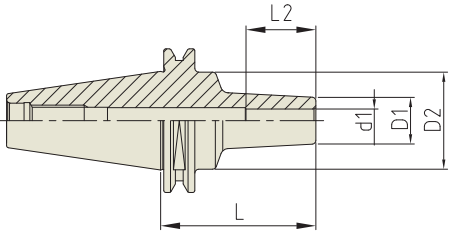

Unit : mm

TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L2	FIG.	WEIGHT (Kg)
25	ISO25-SFH3-50	P2771651	3	11	15	50	10	1	-
	ISO25-SFH4-50	P2771652	4	11	15	50	12	1	-
	ISO25-SFH5-50	P2771653	5	11	15	50	15	1	-
	ISO25-SFH6-40	P2771654	6	12	25	40	18	2	-
	ISO25-SFH8-50	P2771655	8	14	18	50	30	1	-
	ISO25-SFH10-50	P2771656	10	16	20	50	37	1	-

► Inch type products are available.

► Higher balancing grade is available upon request.

► To be supplied with assembling of pull stud bolt.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

D228

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



ER COLLET
CHUCK

ER

ER COLLET CHUCK (SLIM)

SPANN FUTTER-ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

ISO 20/25




ISO 20/25



2.5G





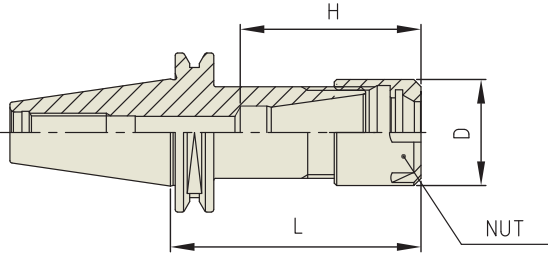

Unit : mm

TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
20	ISO20-ER16M-35	P2776541	0.5 - 10.0	35	22	37.5	ER16M / ER16	-
25	ISO25-ER16M-35	P2776542	0.5 - 10.0	35	22	37.5	ER16M / ER16	-
	ISO25-ER20M-36	P2776543	0.5 - 13.0	36	28	-	ER20M / ER20	-

► Higher balancing grade is available upon request.

► To be supplied with assembling of pull stud bolt.

► Balancing grade G2.5 at 25,000RPM or U max. < 1gmm.

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D307 & D309.

D229

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS




ER COLLET CHUCK

ER

ER COLLET CHUCK (STANDARD)

SPANN FUTTER -ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

DIN 228-MTA

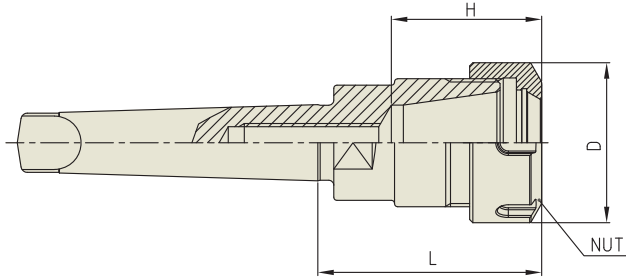

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
1	MTA1-ER11	P2772241	0.5 - 7.0	42.1	19	28.6	ER11	0.30
	MTA1-ER16	P2772242	0.5 - 10.0	43.9	28	36.6	ER16	0.35
2	MTA2-ER20	P2772243	0.5 - 13.0	50	34	40.5	ER20	0.50
	MTA2-ER25	P2772244	1.0 - 16.0	50	42	41	ER25	0.60
3	MTA3-ER25	P2772245	1.0 - 16.0	60	42	52	ER25	0.60
	MTA3-ER32	P2772246	1.0 - 20.0	70	50	47	ER32	0.65
4	MTA4-ER20	P2772247	0.5 - 13.0	60	34	50	ER20	1.00
	MTA4-ER25	P2772248	1.0 - 16.0	60	42	52	ER25	1.10
	MTA4-ER32	P2772249	1.0 - 20.0	65	50	48	ER32	1.30
	MTA4-ER40	P2772250	2.0 - 30.0	80	63	69	ER40	1.50
5	MTA5-ER32	P2772251	1.0 - 20.0	70	50	60	ER32	2.20
	MTA5-ER40	P2772252	2.0 - 30.0	80	63	69	ER40	2.40
	MTA5-ER50	P2772253	4.0 - 34.0	80	78	69	ER50	2.80

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D234

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MTA/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS





POWER MILLING CHUCK

C

POWER MILLING CHUCK

FRÄSPANNFUTTER
MANDRIN PORTE FRAISE
MANDRINI PORTA FRESA
PORTAHERRAMIENTAS PARA FRESADO

DIN 228-MTA

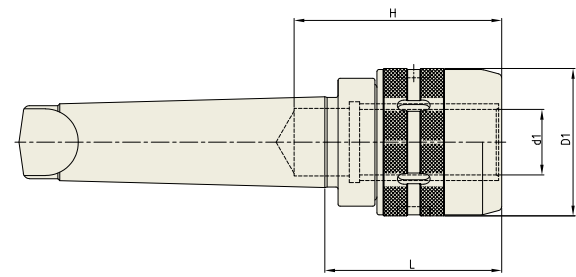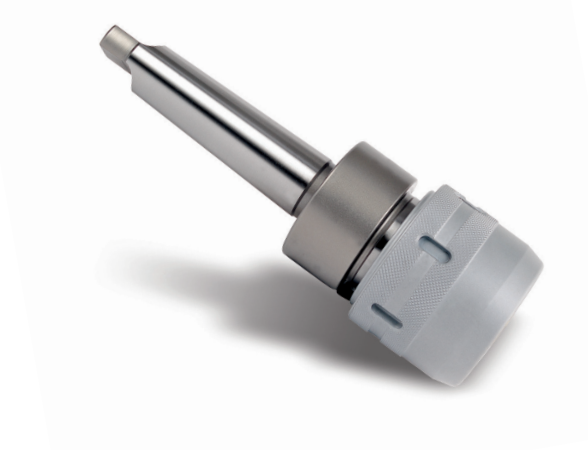

Unit : mm							
TAPER No.	MODEL No.	EDP No.	d1	D1	L	H	WEIGHT (Kg)
4	MTA4-C32	P2546122	32	72	98	85	2.57
5	MTA5-C32	P2546123	32	72	85	100	3.06
	MTA5-C42	P2546124	42	92	114	100	3.45
6	MTA6-C42	P2546125	42	92	99	110	4.14

► Inch type products are available.

► In the case of MT6, it is required to inform machine model number and company name for selection of cutter groove.

► For applicable collet and spanner, please refer to the page D314.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D235

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




HYDRAULIC
CHUCK

HC

HYDRAULIC CHUCK

HYDRAULIK SPANNFUTTER FÜR DEN FORMENBAU
MANDRIN HYDRAULIQUE POUR MOULISTE
MANDRINI IDRAULICI PER STAMPAGGIO
PORTAHERRAMIENTAS HIDRAULICO PARA MOLDES

DIN 228-MTB

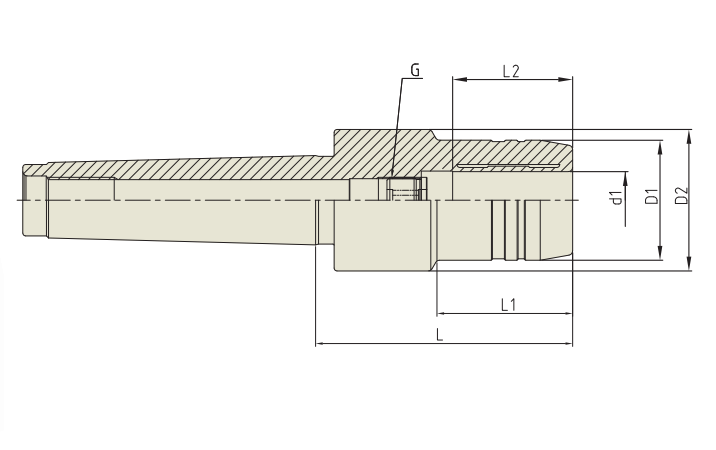

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




ER COLLET
CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

DIN 228-MTB

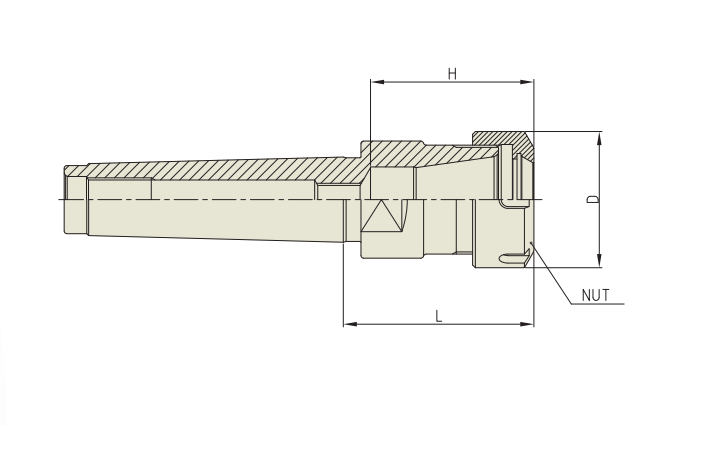

Unit : mm										
TAPER No.	MODEL No.	EDP No.	d1	D1	D2	L	L1	L2	G	WEIGHT (Kg)
4	MTB4-HC20-90	P2770961	20	42	49.5	90	47.5	42	M16×1.0	1.30
	MTB4-HC32-90	P2770962	32	72	72	90	-	55	-	1.40
5	MTB5-HC20-90	P2770963	20	42	49.5	90	47.5	42	M16×1.0	2.20
	MTB5-HC32-90	P2770964	32	72	72	90	-	55	M16×1.0	2.40

- ▶ Inch type products are available.
- ▶ T.I.R shall be controlled by less than 0.008mm at 3D.
- ▶ Supplied with clamping T-wrench.
- ▶ For applicable Hydraulic Chuck collet, please refer to page D291~D294.

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	L	D	H	NUT / COLLET	WEIGHT (Kg)
1	MTB1-ER16	P2772254	0.5 - 10.0	43.9	28	36.6	ER16	0.35
2	MTB2-ER20	P2772255	0.5 - 13.0	50	34	40.5	ER20	0.50
	MTB2-ER25	P2772256	1.0 - 16.0	50	42	41	ER25	0.60
3	MTB3-ER25	P2772257	1.0 - 16.0	60	42	52	ER25	0.60
	MTB3-ER32	P2772258	1.0 - 20.0	70	50	47	ER32	0.65
4	MTB4-ER32	P2772259	1.0 - 20.0	65	50	48	ER32	1.10
	MTB4-ER40	P2772260	2.0 - 30.0	80	63	69	ER40	1.30
5	MTB5-ER32	P2772261	1.0 - 20.0	70	50	60	ER32	2.00
	MTB5-ER40	P2772262	2.0 - 30.0	80	63	69	ER40	2.20
	MTB5-ER50	P2772263	4.0 - 34.0	80	78	69	ER50	2.60

- ▶ For applicable ER collet, please refer to page D296~D304.
- ▶ For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

TOOLING SYSTEM

SK (DIN 69871)
CBT (BT DUAL CONTACT)
BT (JIS B6339/ MAS 403)
HSK (DIN 69893/ ISO 12164)
STRAIGHT
ISO, NT, MT/MTB, GOST
TOOL HOLDER SET
BORING SYSTEM
ACCESSORY & PARTS




POWER MILLING CHUCK

C

POWER MILLING CHUCK

FRÄSPANNFUTTER
MANDRIN PORTE FRAISE
MANDRINI PORTA FRESA
PORTAHERRAMIENTAS PARA FRESADO

DIN 228-MTB

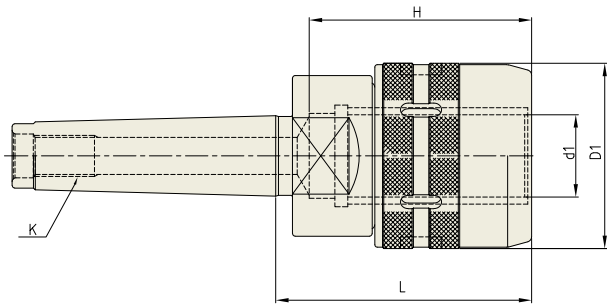

Unit : mm								
TAPER No.	MODEL No.	EDP No.	d1	D1	L	H	K	WEIGHT (Kg)
3	MTB3-C20	P2546126	20	54	74	65	M12	2.10
4	MTB4-C32	P2546127	32	72	98	80	M16	2.57
5	MTB5-C32	P2546128	32	72	85	100	M20	3.06
	MTB5-C42	P2546129	42	92	114	100	M20	3.45

► Inch type products are available.

► In the case of MT6, it is required to inform machine model number and company name for selection of cutter groove.

► For applicable collet and spanner, please refer to the page D314.

GOST 25827-93

AT3

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L	H	NUT / COLLET	WEIGHT (Kg)
40	GOST40-ER16-70	P2780101	0.5 - 10.0	28	70	45	ER16	-
	GOST40-ER16-100	P2780102	0.5 - 10.0	28	100	45	ER16	-
	GOST40-ER25-70	P2780103	1.0 - 16.0	42	70	65	ER25	-
	GOST40-ER25-100	P2780104	1.0 - 16.0	42	100	65	ER25	-
	GOST40-ER32-70	P2780105	1.0 - 20.0	50	70	65	ER32	-
	GOST40-ER32-100	P2780106	1.0 - 20.0	50	100	65	ER32	-
50	GOST50-ER16-90	P2780107	0.5 - 10.0	28	90	45	ER16	-
	GOST50-ER16-150	P2780108	0.5 - 10.0	28	150	45	ER16	-
	GOST50-ER25-90	P2780109	1.0 - 16.0	42	90	65	ER25	-
	GOST50-ER25-150	P2780110	1.0 - 16.0	42	150	65	ER25	-
	GOST50-ER32-90	P2780111	1.0 - 20.0	50	90	65	ER32	-
	GOST50-ER32-150	P2780112	1.0 - 20.0	50	150	65	ER32	-
	GOST50-ER40-90	P2780113	2.0 - 30.0	63	90	65	ER40	-

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D240

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)
CBT (BT DUAL CONTACT)
BT (JIS B6339/ MAS 403)
HSK (DIN 69893/ ISO 12164)
STRAIGHT
ISO, NT, MT/MTB, GOST
TOOL HOLDER SET
BORING SYSTEM
ACCESSORY & PARTS





ER COLLET CHUCK

ER

ER COLLET CHUCK

SPANN FUTTER - ER
MANDRIN À PINCES - ER
MANDRINO PORTA PINZE - ER
PORTAPINZAS - ER

GOST 40/50

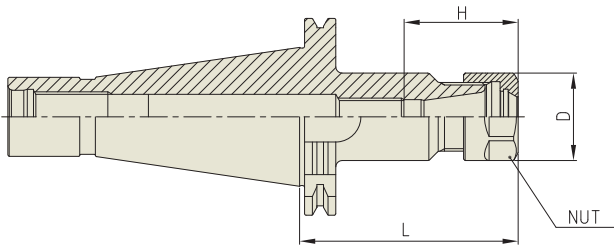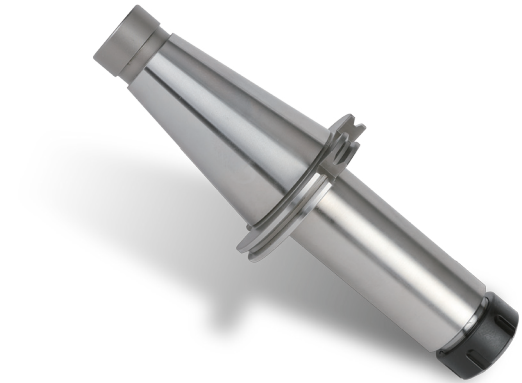

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L	H	NUT / COLLET	WEIGHT (Kg)
40	GOST40-ER16-70	P2780101	0.5 - 10.0	28	70	45	ER16	-
	GOST40-ER16-100	P2780102	0.5 - 10.0	28	100	45	ER16	-
	GOST40-ER25-70	P2780103	1.0 - 16.0	42	70	65	ER25	-
	GOST40-ER25-100	P2780104	1.0 - 16.0	42	100	65	ER25	-
	GOST40-ER32-70	P2780105	1.0 - 20.0	50	70	65	ER32	-
	GOST40-ER32-100	P2780106	1.0 - 20.0	50	100	65	ER32	-
50	GOST50-ER16-90	P2780107	0.5 - 10.0	28	90	45	ER16	-
	GOST50-ER16-150	P2780108	0.5 - 10.0	28	150	45	ER16	-
	GOST50-ER25-90	P2780109	1.0 - 16.0	42	90	65	ER25	-
	GOST50-ER25-150	P2780110	1.0 - 16.0	42	150	65	ER25	-
	GOST50-ER32-90	P2780111	1.0 - 20.0	50	90	65	ER32	-
	GOST50-ER32-150	P2780112	1.0 - 20.0	50	150	65	ER32	-
	GOST50-ER40-90	P2780113	2.0 - 30.0	63	90	65	ER40	-

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

GOST 25827-93

AT3

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	CLAMPING RANGE	D	L	H	NUT / COLLET	WEIGHT (Kg)
40	GOST40-ER16-70	P2780101	0.5 - 10.0	28	70	45	ER16	-
	GOST40-ER16-100	P2780102	0.5 - 10.0	28	100	45	ER16	-
	GOST40-ER25-70	P2780103	1.0 - 16.0	42	70	65	ER25	-
	GOST40-ER25-100	P2780104	1.0 - 16.0	42	100	65	ER25	-
	GOST40-ER32-70	P2780105	1.0 - 20.0	50	70	65	ER32	-
	GOST40-ER32-100	P2780106	1.0 - 20.0	50	100	65	ER32	-
50	GOST50-ER16-90	P2780107	0.5 - 10.0	28	90	45	ER16	-
	GOST50-ER16-150	P2780108	0.5 - 10.0	28	150	45	ER16	-
	GOST50-ER25-90	P2780109	1.0 - 16.0	42	90	65	ER25	-
	GOST50-ER25-150	P2780110	1.0 - 16.0	42	150	65	ER25	-
	GOST50-ER32-90	P2780111	1.0 - 20.0	50	90	65	ER32	-
	GOST50-ER32-150	P2780112	1.0 - 20.0	50	150	65	ER32	-
	GOST50-ER40-90	P2780113	2.0 - 30.0	63	90	65	ER40	-

► For applicable ER collet, please refer to page D296~D304.

► For applicable ER nut, Sealing disk and Spanner, please refer to page D305~D309.

D241

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MT/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

END MILL HOLDER

FRÄSERFUTTER UND FLÄCHENSPANNFUTTER
MANDRIN PORTE FRAISE À QUEUE CYLINDRIQUE, À MÉPLAT
MANDRINI PORTA FRESA TIPO WELDON
PORTAFRESAS Y EJES DE SUJECCION LATERAL

EMH

GOST 40/50



FIG.1

FIG.2

GOST 25827-93

AT3

AD

Unit : mm											
TAPER No.	MODEL No.	EDP No.	d1	D2	L	H	H1	H2	M	FIG.	WEIGHT (Kg)
40	GOST40-EMH6-50	P2780361	6	25	50	35	18	-	M6	1	-
	GOST40-EMH8-50	P2780362	8	28	50	35	18	-	M8	1	-
	GOST40-EMH10-50	P2780363	10	35	50	35.5	20	-	M10	1	-
	GOST40-EMH12-50	P2780364	12	42	50	36	22.5	-	M12	1	-
	GOST40-EMH14-63	P2780365	14	44	63	36	22.5	-	M12	1	-
	GOST40-EMH16-63	P2780366	16	48	63	46	24	-	M14	1	-
	GOST40-EMH18-63	P2780367	18	50	63	46	24	-	M14	1	-
	GOST40-EMH20-63	P2780368	20	52	63	48	25	-	M16	1	-
	GOST40-EMH25-80	P2780369	25	65	80	55	24	25	M18	2	-
	GOST40-EMH32-80	P2780370	32	72	80	57	24	28	M20	2	-
50	GOST50-EMH6-63	P2780371	6	25	63	35	18	-	M6	1	-
	GOST50-EMH8-63	P2780372	8	28	63	35	18	-	M8	1	-
	GOST50-EMH10-63	P2780373	10	35	63	35.5	20	-	M10	1	-
	GOST50-EMH12-63	P2780374	12	42	63	36	22.5	-	M12	1	-
	GOST50-EMH14-63	P2780375	14	44	63	36	22.5	-	M12	1	-
	GOST50-EMH16-63	P2780376	16	48	63	46	24	-	M14	1	-
	GOST50-EMH18-63	P2780377	18	50	63	46	24	-	M14	1	-
	GOST50-EMH20-63	P2780378	20	52	63	48	25	-	M16	1	-
	GOST50-EMH25-80	P2780379	25	65	80	55	24	25	M18	2	-
	GOST50-EMH32-80	P2780380	32	72	80	63	24	28	M20	2	-
	GOST50-EMH40-90	P2780381	40	80	90	68	30	32	M20	2	-

► Inch type products are available.

► Standard End Mill Holder is for a cutting tool with weldon shank and End Mill Holder for a cutting tool with Whistle notch is available upon request.

► Combi-style Holder with ball jointed clamping screw which can be used with cutting tools with Weldon and Whistle notch shank is available.

TOOLING SYSTEM

SK (DIN 69871)

CBT (BT DUAL CONTACT)

BT (JIS B6339/ MAS 403)

HSK (DIN 69893/ ISO 12164)

STRAIGHT

ISO, NT, MT/MTB, GOST

TOOL HOLDER SET

BORING SYSTEM

ACCESSORY & PARTS

SHELL MILL ARBOR

AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG
MANDRIN PORTE-FRAISES
MANDRINO CON TRASCINAMENTO FISSO
PORTA FRESAS

SMA

GOST 40/50



FIG.1

FIG.2

GOST 25827-93

AT3

AD

Unit : mm								
TAPER No.	MODEL No.	EDP No.	D1	D2	L	H	BOLT	WEIGHT (Kg)
40	GOST40-SMA16-40	P2780401	16	32	40	17	M8x16L	-
	GOST40-SMA16-100	P2780402	16	32	100	17	M8x16L	-
	GOST40-SMA22-40	P2780403	22	40	40	19	M10x18L	-
	GOST40-SMA22-100	P2780404	22	40	100	19	M10x18L	-
	GOST40-SMA27-45	P2780405	27	48	45	21	M12x22L	-
	GOST40-SMA32-45	P2780406	32	58	45	24	M16x26L	-
	GOST50-SMA16-40	P2780407	16	32	40	17	M8x16L	-
50	GOST50-SMA16-100	P2780408	16	32	100	17	M8x16L	-
	GOST50-SMA22-40	P2780409	22	40	40	19	M10x18L	-
	GOST50-SMA22-100	P2780410	22	40	100	19	M10x18L	-
	GOST50-SMA27-45	P2780411	27	48	45	21	M12x22L	-
	GOST50-SMA27-120	P2780412	27	48	120	21	M12x22L	-
	GOST50-SMA32-45	P2780413	32	58	45	24	M16x26L	-
	GOST50-SMA32-130	P2780414	32	58	130	24	M16x26L	-
	GOST50-SMA40-55	P2780415	40	70	55	27	M20x30L	-
	GOST50-SMA40-150	P2780416	40	70	150	27	M20x30L	-
	GOST50-SMA50-60	P2780417	50	90	60	30	M24x36L	-

► For parts, please refer to page D311.

D242

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D243

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




MORSE TAPER ARBOR

MTA

MORSE TAPER ARBOR

EINSATZHÜLSEN FÜR MORSEKEGEL
DOUILLES DE RÉDUCTION CÔNE MORSE
MANDRINO RIDUZIONE CONO MORSE
REDUCTORES A MORSE

GOST 40/50

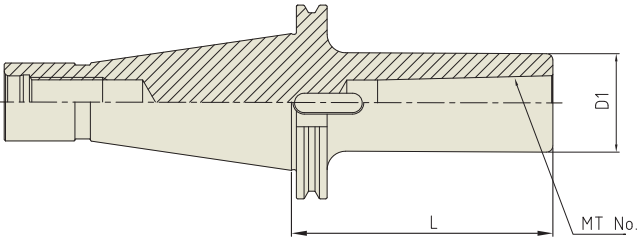

GOST
25827-93

AT3

A

Unit : mm						
TAPER No.	MODEL No.	EDP No.	MT No.	D1	L	WEIGHT (Kg)
40	GOST40-MTA1-115	P2780451	1	25	115	-
	GOST40-MTA2-125	P2780452	2	32	125	-
	GOST40-MTA3-145	P2780453	3	40	145	-
	GOST40-MTA4-165	P2780454	4	48	165	-
50	GOST50-MTA2-135	P2780455	2	32	135	-
	GOST50-MTA3-155	P2780456	3	40	155	-
	GOST50-MTA4-180	P2780457	4	48	180	-
	GOST50-MTA5-215	P2780458	5	63	215	-

YG-1 TOOLING SYSTEM

TOOL HOLDER SET



HYDRAULIC CHUCK

POWER MILLING CHUCK (STANDARD)

POWER MILLING CHUCK (QUICK CHANGE)

D244

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 YG-1 CO., LTD.


phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D245

MODEL No.	EDP No.	HYDRAULIC CHUCK	REDUCTION SLEEVE	WRENCH
HCSS40-20	P2770971	SK40AD/B-HC20P-64.5	HK20-6.8.10.12.16 (5pcs)	φ5mm
HCSB40-20	P2770972	BT40AD/B-HC20P-72.5	HK20-6.8.10.12.16 (5pcs)	φ5mm
HCSH40-20	P2770973	HSK63A-HC20P-80	HK20-6.8.10.12.16 (5pcs)	φ5mm

TAPER	STANDARD SET MODEL No.	EDP No.	MILLING CHUCK	END MILL COLLET	SPANNER
SK	SSK40-C20	P2526031	SK40-C20-105	K20-6, 8, 10, 12, 16 (5pcs)	C20 SP
	SSK40-C32	P2773301	SK40-C32-105	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SSK50-C32	P2773302	SK50-C32-105	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SSK50-C42	P2773303	SK50-C42-115	K42-6, 8, 10, 12, 16, 20, 25, 32 (8pcs)	C42 SP
BT	SBT40-C20	P2546021	BT40-C20-105	K20-6, 8, 10, 12, 16 (5pcs)	C20 SP
	SBT40-C32	P2546022	BT40-C32-105	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SBT50-C32	P2546023	BT50-C32-105	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SBT50-C42	P2546024	BT50-C42-115	K42-6, 8, 10, 12, 16, 20, 25, 32 (8pcs)	C42 SP
ISO	SISO40-C20	P2516021	ISO40-C20-78	K20-6, 8, 10, 12, 16 (5pcs)	C20 SP
	SISO40-C32	P2516022	ISO40-C32-78	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SISO50-C32	P2516023	ISO50-C32-85	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SISO50-C42	P2516024	ISO50-C42-102	K42-6, 8, 10, 12, 16, 20, 25, 32 (8pcs)	C42 SP
NT	SNT40-C32	P2773304	NT40-C32	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SNT50-C32	P2773305	NT50-C32	K32-6, 8, 10, 12, 16, 20, 25 (7pcs)	C32 SP
	SNT50-C42	P2773306	NT50-C42	K42-6, 8, 10, 12, 16, 20, 25, 32 (8pcs)	C42 SP

FINE & ROUGH BORING BAR (SMALL BORE)

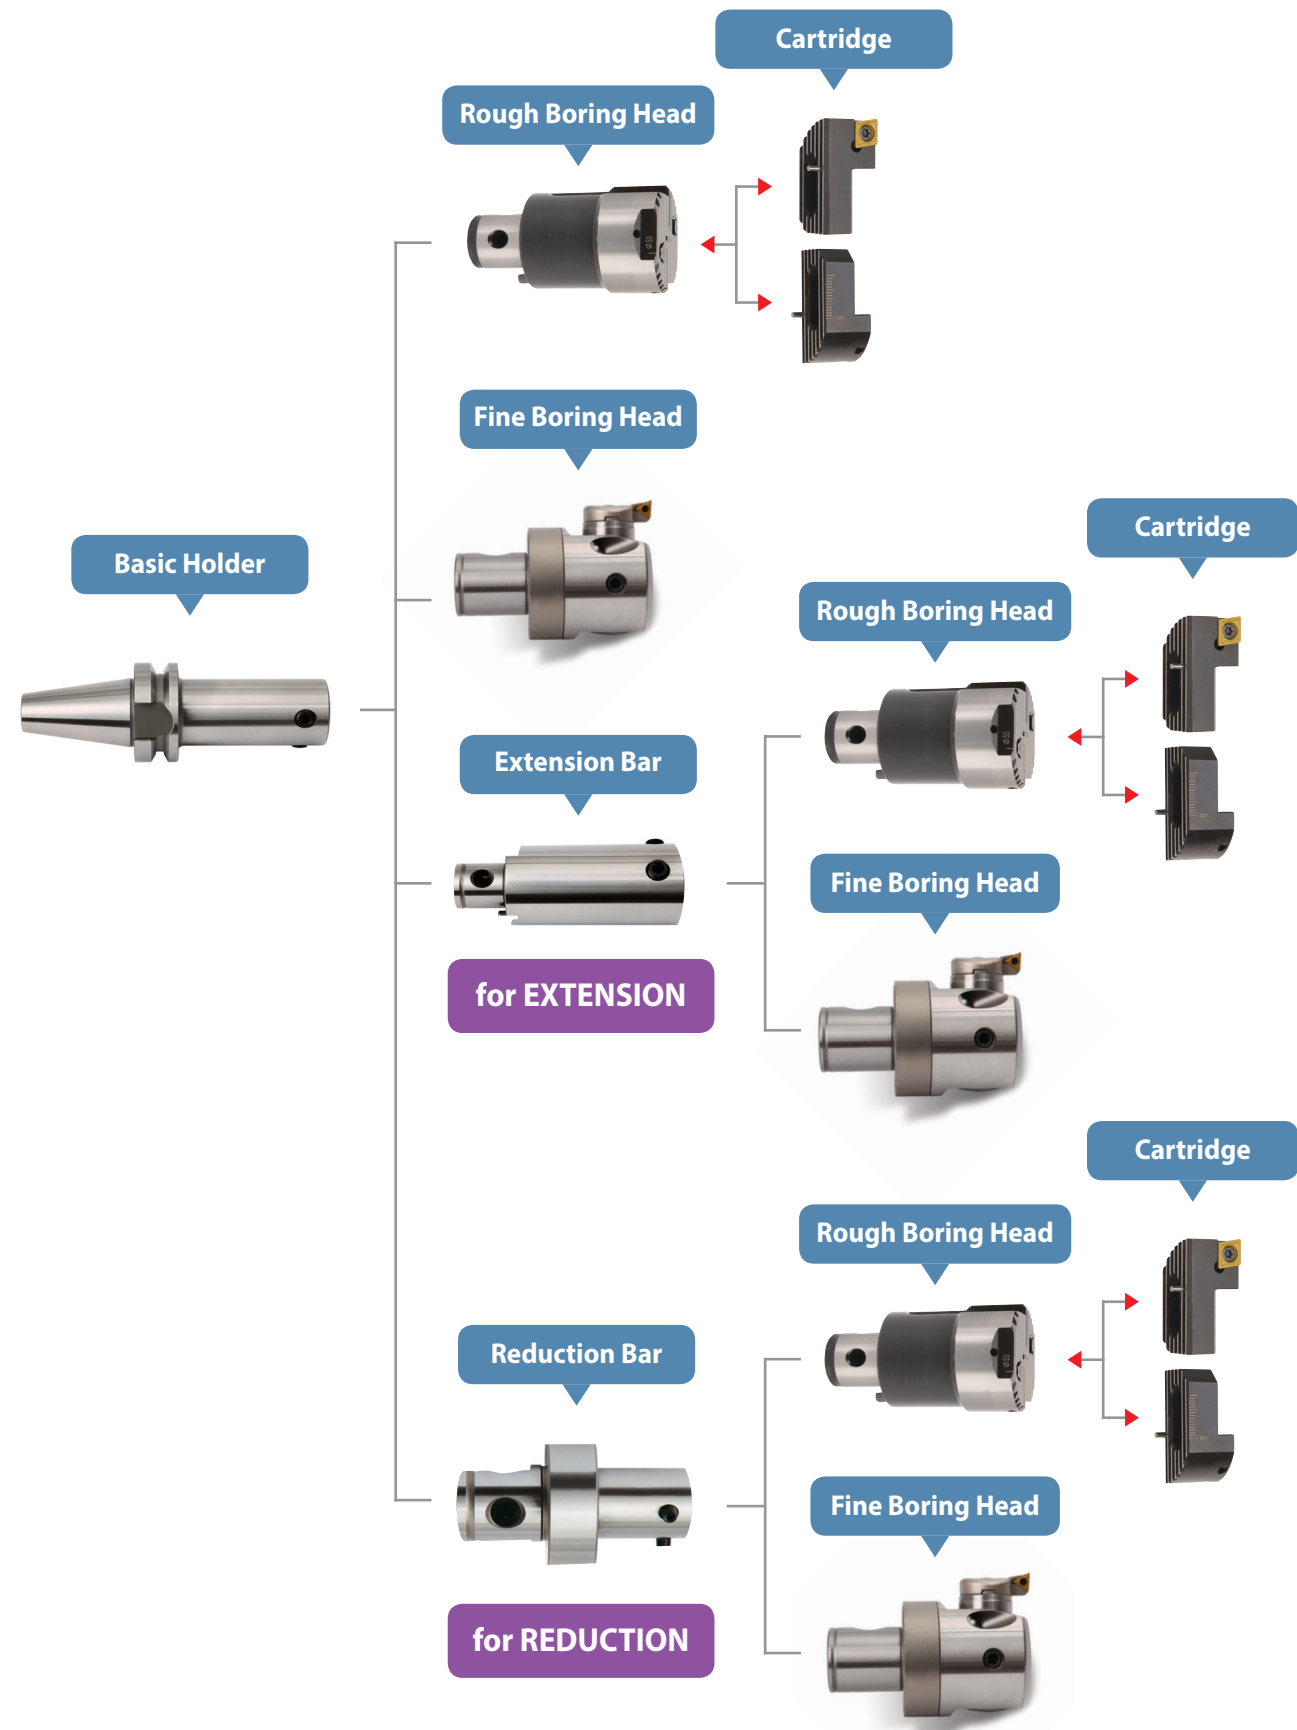

Fine Boring Range : 20mm~154mm



FEATURE

- Easy assembly and wide expandability
- Precise boring range adjustment by adjustment Dial with 1/100mm unit
- Ease to adjust length by employing modular system to use extension bar with various size
- Double rigid fixing of extension bar with
 - Side locking
 - Fixing pin inside
- Design to use insert conforming to ISO standard
- Basic Holder, Extension Bar and Reduction Bar interchangeable between Fine Boring Bar and Rough Boring Bar

Rough Boring Range : 25mm~156mm



FEATURE

- Easy to replace head
- Extension Bar : Adjusting length according to machining conditions
- Reduction Bar : Adjusting boring range according to machining conditions
- Precision of extension, reduction, and repeatability of assembling and disassembling of Boring Head
- Using insert conforming to ISO standard
- Basic Holder, Extension Bar and Reduction Bar interchangeable between Fine Boring Bar and Rough Boring Bar



HSK-A (DIN 69893/ISO 12164)								Unit : mm
TAPER No.	MODEL No.	EDP No.	S No.	D	L	G	FIG.	WEIGHT (Kg)
40A	HSK40A-S11-72.5	P2902001	11	18.5	72.5	M5x0.8	2	-
	HSK40A-S14-39.5	P2902002	14	23.5	39.5	M5x0.8	2	-
	HSK40A-S14-84.5	P2902003	14	23.5	84.5	M5x0.8	2	-
	HSK40A-S18-45	P2902004	18	31	45	M8x1.0	2	-
	HSK40A-S18-80	P2902005	18	31	80	M8x1.0	2	-
	HSK40A-S22-53	P2902006	22	39	53	M8x1.0	3	-
	HSK40A-S22-73	P2902007	22	39	73	M8x1.0	3	-
50A	HSK50A-S11-72.5	P2902008	11	18.5	72.5	M5x0.8	2	-
	HSK50A-S14-84.5	P2902009	14	23.5	84.5	M5x0.8	2	-
	HSK50A-S18-80	P2902010	18	31	80	M8x1.0	2	-
	HSK50A-S22-73	P2902011	22	39	73	M8x1.0	3	-
	HSK50A-S28-83	P2902012	28	50	83	M10x1.0	3	-
63A	HSK63A-S11-77.5	P2902013	11	18.5	77.5	M5x0.8	2	-
	HSK63A-S14-89.5	P2902014	14	23.5	89.5	M5x0.8	2	-
	HSK63A-S18-100	P2902015	18	31	100	M8x1.0	2	-
	HSK63A-S22-93	P2902016	22	39	93	M8x1.0	2	-
	HSK63A-S28-83	P2902017	28	50	83	M10x1.0	2	-
	HSK63A-S36-79	P2902018	36	64	79	M16x1.5	3	-
	HSK63A-S46-100	P2902019	46	90	100	M16x1.5	3	-
100A	HSK100A-S11-102.5	P2902020	11	18.5	102.5	M5x0.8	1	-
	HSK100A-S14-114.5	P2902021	14	23.5	114.5	M5x0.8	1	-
	HSK100A-S18-125	P2902022	18	31	125	M8x1.0	1	-
	HSK100A-S22-118	P2902023	22	39	118	M8x1.0	2	-
	HSK100A-S22-178	P2902024	22	39	178	M8x1.0	2	-
	HSK100A-S28-108	P2902025	28	50	108	M10x1.0	2	-
	HSK100A-S28-183	P2902026	28	50	183	M10x1.0	2	-
	HSK100A-S28-228	P2902027	28	50	228	M10x1.0	2	-
	HSK100A-S36-94	P2902028	36	64	94	M16x1.5	2	-
	HSK100A-S36-169	P2902029	36	64	169	M16x1.5	2	-
	HSK100A-S36-229	P2902030	36	64	229	M16x1.5	2	-
	HSK100A-S46-123	P2902031	46	90	123	M16x1.5	2	-
	HSK100A-S46-273	P2902032	46	90	273	M16x1.5	2	-

- ▶ The Basic Holder interchangeable between Fine Boring and Rough Boring bar.
- ▶ The Basic Holder, Boring Head & Insert Holder must be ordered separately.

PART

PART

ROUGH BORING BAR (SMALL BORE)

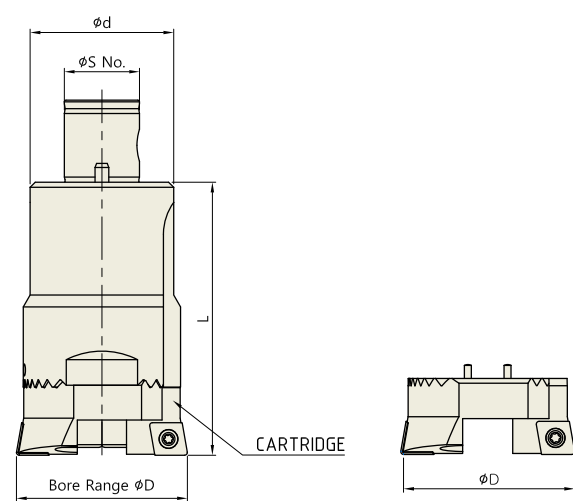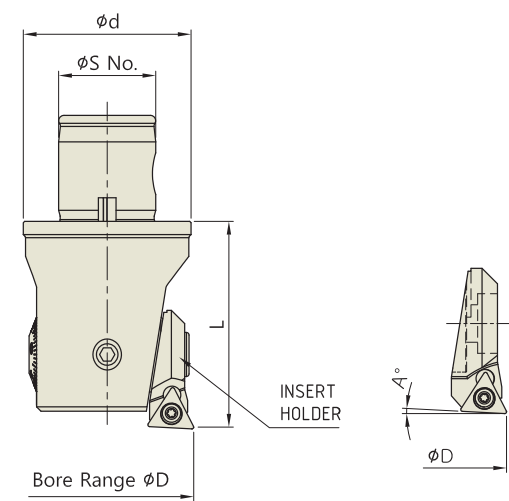

◆ ROUGH BORING HEAD						Unit : mm
HEAD	EDP No.	CARTRIDGE	BORE RANGE (ØD)	S No.	d	L
S11-TBH25-34	P2905001	TBH25-34	Ø25~34	11	22	50
S18-TBH34-51	P2905002	TBH34-43N	Ø34~43	18	31	60
		TBH42-51N	Ø42~51			
S22-TBH50-77	P2905003	TBH50-64N	Ø50~64	22	42	80
		TBH63-77N	Ø63~77			
S36-TBH76-116	P2905004	TBH76-97N	Ø76~97	36	65	110
		TBH95-116N	Ø95-116			
S46-TBH115-156	P2905005	TBH115-136N	Ø115~136	46	90	105
		TBH135-156N	Ø135~156			

◆ ROUGH BORING CARTRIDGE					Unit : mm
Model No.	EDP No.	BORE RANGE (ØD)	INSERT	INSERT SCREW	TORX WRENCH
TBH25-34	P2906001	25~34	CCMT0602□□	FTKA02565	T07
TBH34-43N	P2906002	34~43	CCMT0602□□	FTKA02565	T07
TBH42-51N	P2906006	42~51			
TBH50-64N	P2906003	50~64	CCMT09T3□□	FTNA0408	T15
TBH63-77N	P2906007	63~77			
TBH76-97N	P2906004	76~97	CCMT1204□□	FTNA0513	T20
TBH95-116N	P2906008	95-116			
TBH115-136N	P2906005	115~136	CCMT1204□□	FTNA0513	T20
TBH135-156N	P2906009	135~156			

- ▶ The Cartridge Clamp Screw is supplied with Boring Head.
- ▶ The Insert Screw is supplied with Cartridge.
- ▶ The Torx Wrench should be ordered. Please contact us to purchase this wrench.
- ▶ The Boring Head & Insert Holder must be ordered separately.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

EXTENSION
BAR

PART

FINE & ROUGH BORING BAR (SMALL BORE)

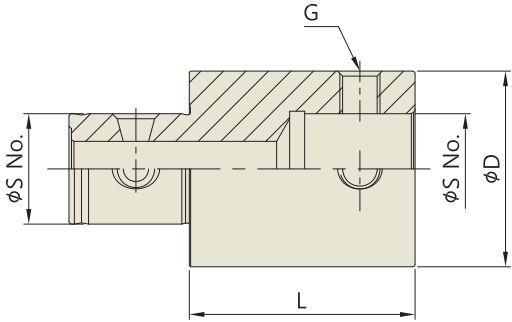


Unit : mm						
MODEL No.	EDP No.	S No.	D	L	G	WEIGHT (Kg)
E-S11-30	P2907001	11	19	30	M5x0.8	-
E-S14-30	P2907002	14	24	30	M5x0.8	-
E-S18-30	P2907003	18	31	30	M8x1.0	-
E-S22-45	P2907004	22	39	45	M8x1.0	-
E-S28-60	P2907005	28	50	60	M10x1.0	-
E-S28-90	P2907006	28	50	90	M10x1.0	-
E-S36-60	P2907007	36	64	60	M16x1.5	-
E-S36-100	P2907008	36	64	100	M16x1.5	-
E-S46-105	P2907009	46	90	105	M16x1.5	-

► Extends projection length by insertion between Basic Holder & Boring Head.

REDUCTION
BAR

PART

FINE & ROUGH BORING BAR (SMALL BORE)

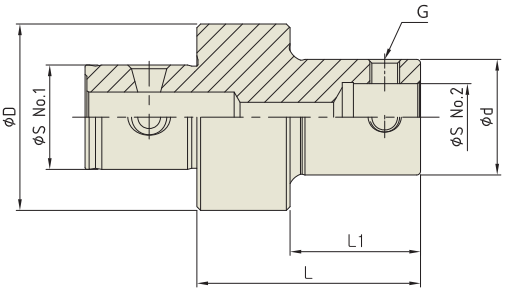

Unit : mm									
MODEL No.	EDP No.	S No.1	S No.2	D	d	L	L1	G	WEIGHT (Kg)
R-S14-S11-30	P2908001	14	11	24	19	30	20	M5x0.8	-
R-S18-S11-30	P2908002	18	11	31	19	30	20	M5x0.8	-
R-S18-S14-30	P2908003	18	14	31	24	30	20	M5x0.8	-
R-S22-S11-45	P2908004	22	11	39	19	45	25	M5x0.8	-
R-S22-S14-45	P2908005	22	14	39	24	45	25	M5x0.8	-
R-S22-S18-45	P2908006	22	18	39	31	45	25	M8x1.0	-
R-S28-S11-60	P2908007	28	11	50	19	60	35	M5x0.8	-
R-S28-S14-60	P2908008	28	14	50	24	60	35	M5x0.8	-
R-S28-S18-60	P2908009	28	18	50	31	60	35	M8x1.0	-
R-S28-S22-60	P2908010	28	22	50	39	60	35	M8x1.0	-
R-S36-S11-60	P2908011	36	11	64	19	60	35	M5x0.8	-
R-S36-S14-60	P2908012	36	14	64	24	60	35	M5x0.8	-
R-S36-S18-60	P2908013	36	18	64	31	60	35	M8x1.0	-
R-S36-S22-60	P2908014	36	22	64	39	60	35	M8x1.0	-
R-S36-S28-60	P2908015	36	28	64	50	60	35	M10x1.0	-
R-S46-S11-105	P2908016	46	11	90	19	105	75	M5x0.8	-
R-S46-S14-105	P2908017	46	14	90	24	105	75	M5x0.8	-
R-S46-S18-105	P2908018	46	18	90	31	105	75	M8x1.0	-
R-S46-S22-105	P2908019	46	22	90	39	105	75	M8x1.0	-
R-S46-S28-105	P2908020	46	28	90	50	105	75	M10x1.0	-
R-S46-S36-105	P2908021	46	36	90	64	105	75	M16x1.5	-

► Reduces the connection sizes to use smaller Boring Head.

D258

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

D259

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

▶ NEXT PAGE


- ▶ This is for help selecting Fine Boring Head & Insert Holder.
- ▶ The Insert Holder Clamp Screw is supplied with Boring Head.
- ▶ The Insert Screw is supplied with Insert Holder.
- ▶ The Torx Wrench should be ordered. Please contact us to purchase this wrench.
- ▶ The Basic Holder, Boring Head & Insert Holder must be ordered separately.
- ▶ The L, L1 dimensions in the table are the reference values when Boring Head and Insert Holder are mounted

ROUGH BORING

BAR

TBH

ROUGH BORING BAR (SMALL BORE)

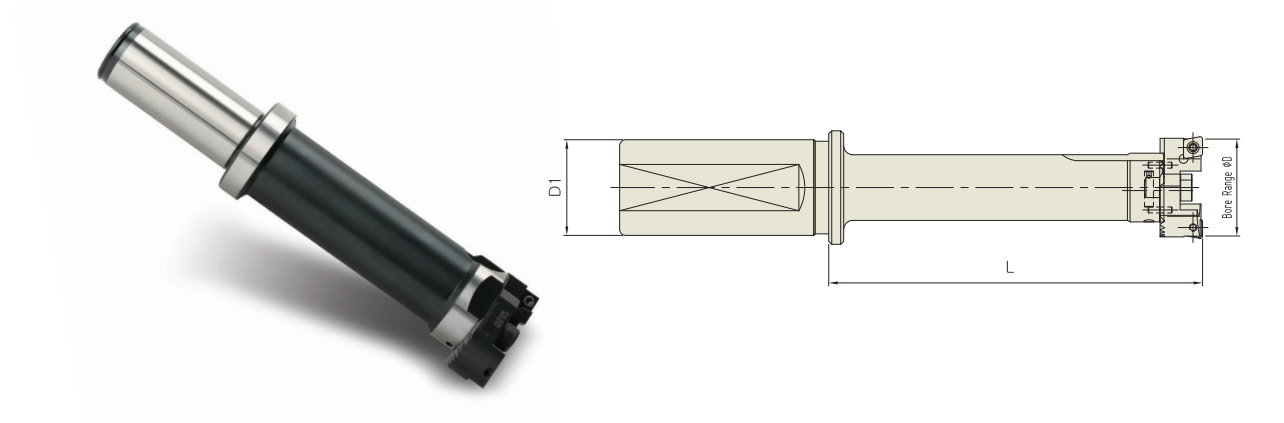


STRAIGHT-ST Unit : mm

TAPER No.	MODEL No.	EDP No.	CARTRIDGE	BORE RANGE (ØD)	L	D1	WEIGHT (Kg)
32	ST32-TBH25-125	P2779559	TBH25-34	Ø25 ~ Ø34	125	32	-
	ST32-TBH34-130	P2779560	TBH34-43N	Ø34 ~ Ø43	130	32	-
			TBH42-51N	Ø42 ~ Ø51			-
	ST32-TBH50-155	P2779561	TBH50-64N	Ø50 ~ Ø64	155	32	-
			TBH63-77N	Ø63 ~ Ø77			-
40	ST40-TBH76-185	P2779562	TBH76-97N	Ø76 ~ Ø97	185	40	-
			TBH95-116N	Ø95 ~ Ø116			-
42	ST42-TBH76-185	P2779563	TBH76-97N	Ø76 ~ Ø97	185	42	-
			TBH95-116N	Ø96 ~ Ø116			-

- ▶ This is for help selecting Straight Rough Boring Head & Cartridge.
- ▶ The Cartridge Clamp Screw is supplied with Boring Head.
- ▶ The Insert Screw is supplied with Cartridge.
- ▶ The Torx Wrench should be ordered. Please contact us to purchase this wrench.
- ▶ The Straight Shank & Cartridge must be ordered separately.
- ▶ The Straight Shank & Rough Boring Head are combined.
- ▶ The dimensions L in the table are the reference values when cartridge are mounted.

- ▶ This is for help selecting Rough Boring Head & Cartridge.
- ▶ The Cartridge Clamp Screw is supplied with Boring Head.
- ▶ The Insert Screw is supplied with Cartridge.
- ▶ The Torx Wrench should be ordered. Please contact us to purchase this wrench.
- ▶ The Basic Holder, Rough Boring Head & Cartridge must be ordered separately.
- ▶ The L1, L2 dimensions in the table are the reference values when Boring Head and Cartridge are mounted.

Boring Range : 153mm~576mm (FINE BORING BAR)
156mm~576mm (ROUGH BORING BAR)

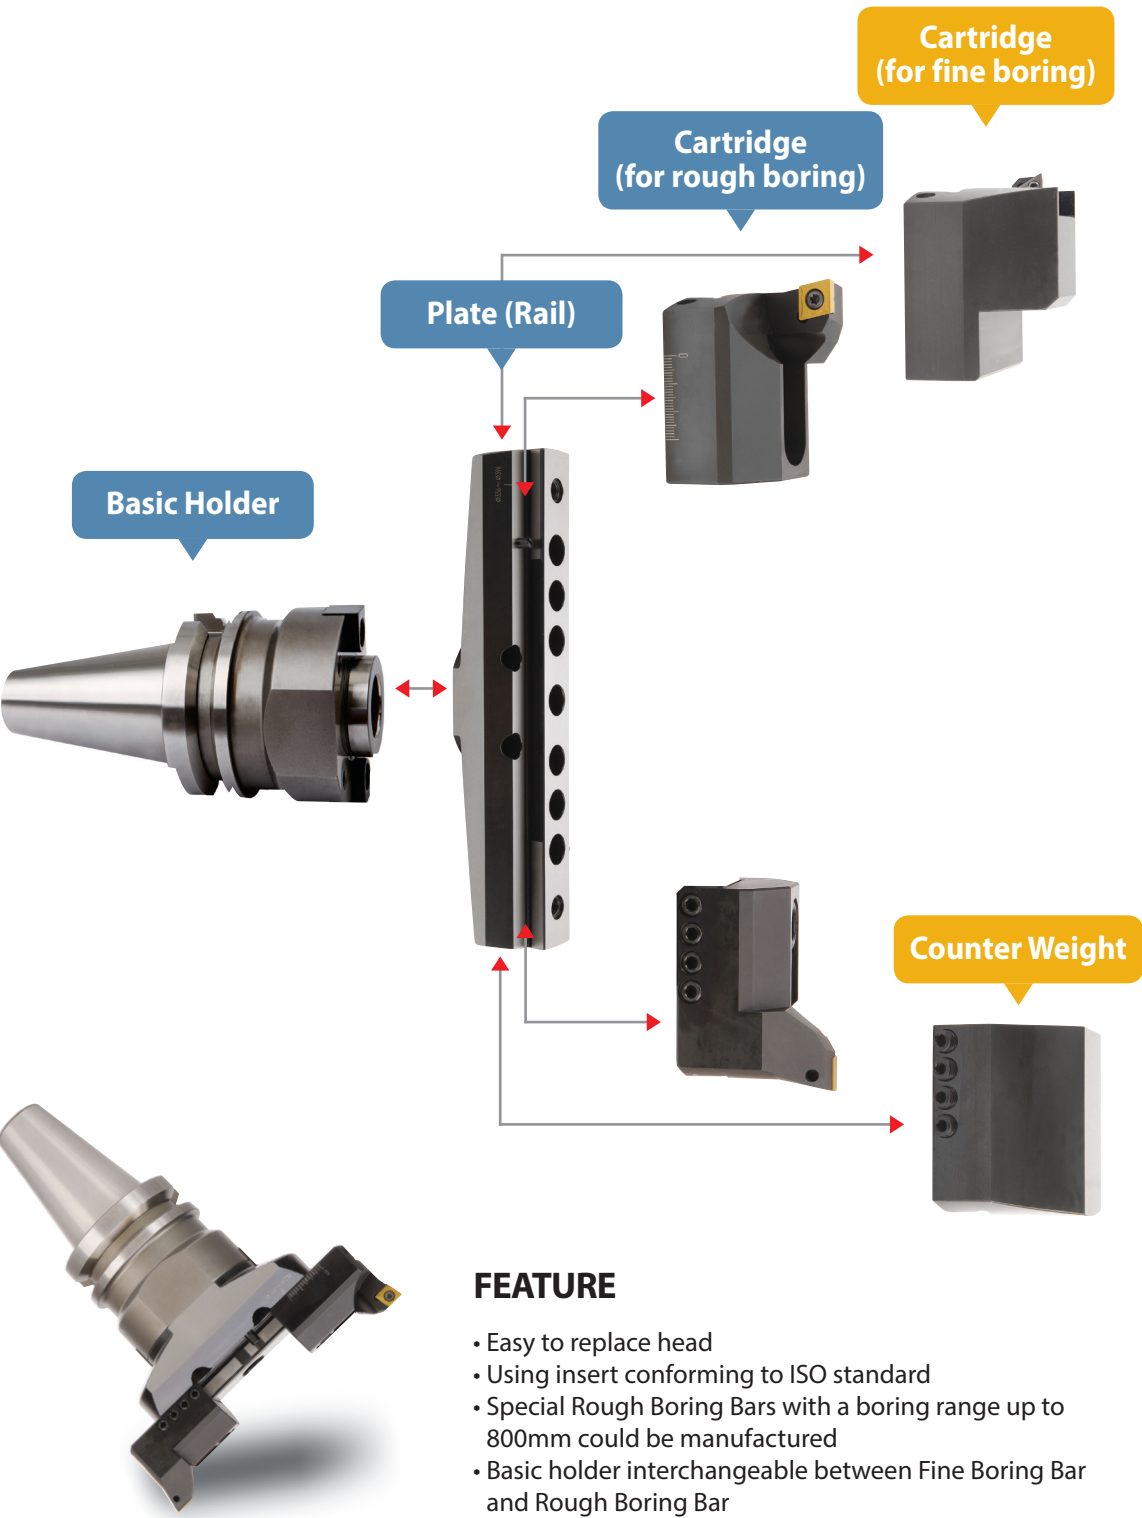


FEATURE

- Easy to replace head
- Using insert conforming to ISO standard
- Special Rough Boring Bars with a boring range up to 800mm could be manufactured
- Basic holder interchangeable between Fine Boring Bar and Rough Boring Bar



PART

FINE & ROUGH BORING BAR (BIG BORE)

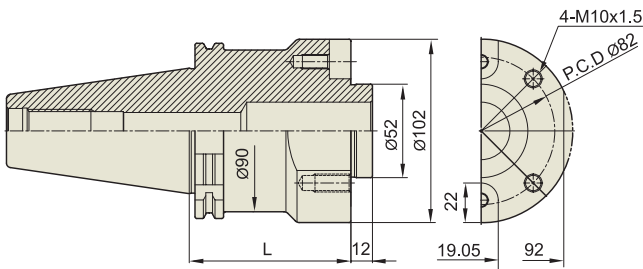


SK (DIN 69871)

Unit : mm

MODEL No.	L
SK50-SAS102-90	90
SK50-SAS102-140	140
SK50-SAS102-190	190

▶ Basic holder interchangeable between Fine Boring Bar and Rough Boring Bar.

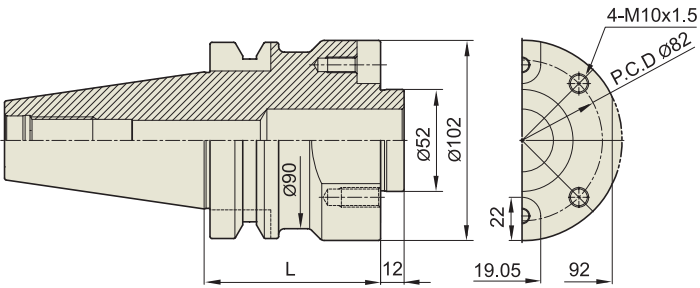

BT (JIS B6339/MAS 403)

Unit : mm

MODEL No.	L
BT50-SAS102-90	90
BT50-SAS102-140	140
BT50-SAS102-190	190

▶ Basic holder interchangeable between Fine Boring Bar and Rough Boring Bar.

BT (JIS B6339/MAS 403)			Unit : mm		
MODEL No.	D (BORE RANGE)		BODY (BASIC HOLDER)	BORING HEAD	WEIGHT (Kg)
	Min.	Max.			
BT50-FBH153-195	153	216	BT50-SAS102-90	FBH153S	-
BT50-FBH153-265			BT50-SAS102-160		-
BT50-FBH153-315			BT50-SAS102-210		-
BT50-FBH153-365			BT50-SAS102-260		-
BT50-FBH216-195	216	276	BT50-SAS102-90	FBH216S	-
BT50-FBH216-265			BT50-SAS102-160		-
BT50-FBH216-315			BT50-SAS102-210		-
BT50-FBH216-365			BT50-SAS102-260		-
BT50-FBH276-195	276	336	BT50-SAS102-90	FBH276S	-
BT50-FBH276-265			BT50-SAS102-160		-
BT50-FBH276-315			BT50-SAS102-210		-
BT50-FBH276-365			BT50-SAS102-260		-
BT50-FBH336-195	336	396	BT50-SAS102-90	FBH336S	-
BT50-FBH336-265			BT50-SAS102-160		-
BT50-FBH336-315			BT50-SAS102-210		-
BT50-FBH336-365			BT50-SAS102-260		-
BT50-FBH396-195	396	456	BT50-SAS102-90	FBH396S	-
BT50-FBH396-265			BT50-SAS102-160		-
BT50-FBH396-315			BT50-SAS102-210		-
BT50-FBH396-365			BT50-SAS102-260		-
BT50-FBH456-195	456	516	BT50-SAS102-90	FBH456S	-
BT50-FBH456-265			BT50-SAS102-160		-
BT50-FBH456-315			BT50-SAS102-210		-
BT50-FBH456-365			BT50-SAS102-260		-
BT50-FBH516-195	516	576	BT50-SAS102-90	FBH516S	-
BT50-FBH516-265			BT50-SAS102-160		-
BT50-FBH516-315			BT50-SAS102-210		-
BT50-FBH516-365			BT50-SAS102-260		-

► Basic holder interchangeable between Fine Boring Bar and Rough Boring Bar.

SK (DIN 69871/ISO 7388-1)							Unit : mm
MODEL No.	D (BORE RANGE)	L	BODY	PLATE	INSERT	WEIGHT (Kg)	
	Min. - Max.						
SK50-TBH156-180	156 - 216	180	SK50-SAS102-90	PLA156	CCMT120400	-	
SK50-TBH156-230	156 - 216	230	SK50-SAS102-140	PLA156	CCMT120400	-	
SK50-TBH156-280	156 - 216	280	SK50-SAS102-190	PLA156	CCMT120400	-	
SK50-TBH216-180	216 - 276	180	SK50-SAS102-90	PLA216	CCMT120400	-	
SK50-TBH216-230	216 - 276	230	SK50-SAS102-140	PLA216	CCMT120400	-	
SK50-TBH216-280	216 - 276	280	SK50-SAS102-190	PLA216	CCMT120400	-	
SK50-TBH276-180	276 - 336	180	SK50-SAS102-90	PLA276	CCMT120400	-	
SK50-TBH276-230	276 - 336	230	SK50-SAS102-140	PLA276	CCMT120400	-	
SK50-TBH276-280	276 - 336	280	SK50-SAS102-190	PLA276	CCMT120400	-	
SK50-TBH336-180	336 - 396	180	SK50-SAS102-90	PLA336	CCMT120400	-	
SK50-TBH336-230	336 - 396	230	SK50-SAS102-140	PLA336	CCMT120400	-	
SK50-TBH336-280	336 - 396	280	SK50-SAS102-190	PLA336	CCMT120400	-	
SK50-TBH396-180	396 - 456	180	SK50-SAS102-90	PLA396	CCMT120400	-	
SK50-TBH396-230	396 - 456	230	SK50-SAS102-140	PLA396	CCMT120400	-	
SK50-TBH396-280	396 - 456	280	SK50-SAS102-190	PLA396	CCMT120400	-	
SK50-TBH456-180	456 - 516	180	SK50-SAS102-90	PLA456	CCMT120400	-	
SK50-TBH456-230	456 - 516	230	SK50-SAS102-140	PLA456	CCMT120400	-	
SK50-TBH456-280	456 - 516	280	SK50-SAS102-190	PLA456	CCMT120400	-	
SK50-TBH516-180	516 - 576	180	SK50-SAS102-90	PLA516	CCMT120400	-	
SK50-TBH516-230	516 - 576	230	SK50-SAS102-140	PLA516	CCMT120400	-	
SK50-TBH516-280	516 - 576	280	SK50-SAS102-190	PLA516	CCMT120400	-	

- ▶ Upon request, special Rough Boring Bars with a boring range up to 800mm could be manufactured and supplied.
- ▶ Basic holder interchangeable between Fine Boring Bar and Rough Boring Bar.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM


ACCESSORY
& PARTS

ROUGH BORING
BAR

TBH

ROUGH BORING BAR (BIG BORE)

DOPPELSCHNEIDER - BOHRSTANGE
BARRE D'ALÉSAGE À 2 ARÊTES DE COUPE
PORTA TESTINE BILAMA
BARRAS DE MANDRINAR DE DOS PLACAS

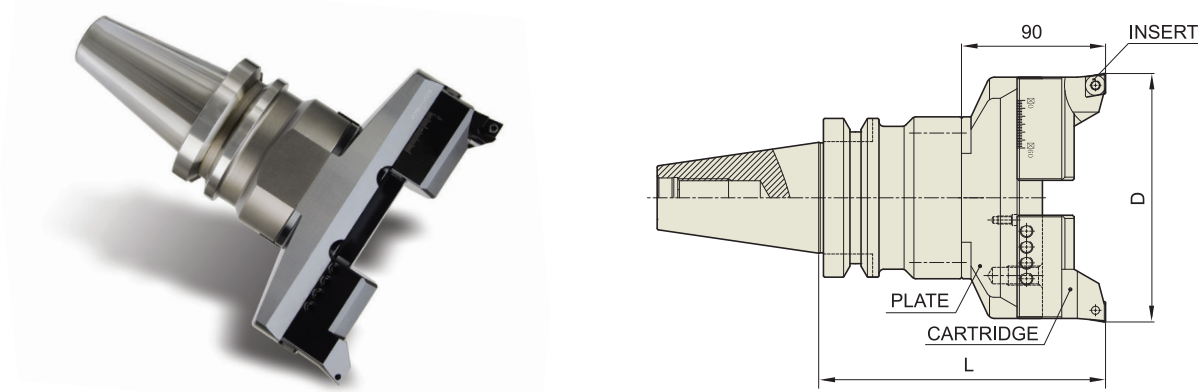

JIS
B6339-
BT

AT3

A

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM


ACCESSORY
& PARTS

MICRO BORING
BAR

BCA

MICRO BORING BAR

MIKRO - BOHRSTANGE
BARRE D'ALÉSAGE MICRO
PORTA TESTINE MICROREGISTRABILI
BARRAS DE MANDRINAR MICRO

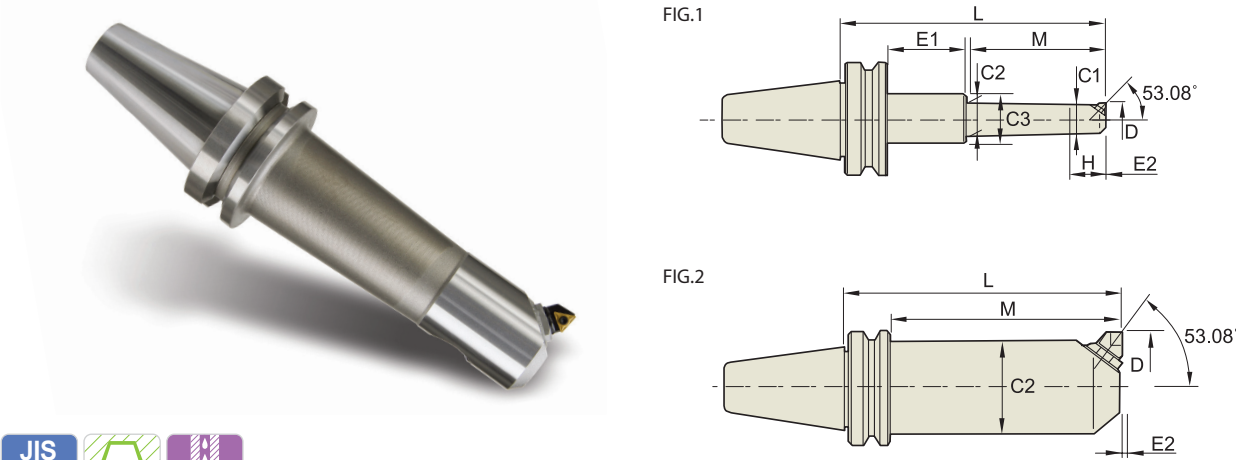

JIS
B6339-
BT

AT3

A

BT (JIS B6339/MAS 403)																Unit : mm	
TAPER No.	MODEL No.	EDP No.	D (BORE RANGE)		L	BODY	PLATE	INSERT	WEIGHT (Kg)								WEIGHT (Kg)
			Min. - Max.														
30	BT50-TBH156-180		156 - 216		180	BT50-SAS102-90	PLA156	CCMT120400	-								-
	BT50-TBH156-230		156 - 216		230	BT50-SAS102-140	PLA156	CCMT120400	-								-
	BT50-TBH156-280		156 - 216		280	BT50-SAS102-190	PLA156	CCMT120400	-								-
	BT50-TBH216-180		216 - 276		180	BT50-SAS102-90	PLA216	CCMT120400	-								-
	BT50-TBH216-230		216 - 276		230	BT50-SAS102-140	PLA216	CCMT120400	-								-
	BT50-TBH216-280		216 - 276		280	BT50-SAS102-190	PLA216	CCMT120400	-								-
	BT50-TBH276-180		276 - 336		180	BT50-SAS102-90	PLA276	CCMT120400	-								-
	BT50-TBH276-230		276 - 336		230	BT50-SAS102-140	PLA276	CCMT120400	-								-
	BT50-TBH276-280		276 - 336		280	BT50-SAS102-190	PLA276	CCMT120400	-								-
	BT50-TBH336-180		336 - 396		180	BT50-SAS102-90	PLA336	CCMT120400	-								-
	BT50-TBH336-230		336 - 396		230	BT50-SAS102-140	PLA336	CCMT120400	-								-
	BT50-TBH336-280		336 - 396		280	BT50-SAS102-190	PLA336	CCMT120400	-								-
	BT50-TBH396-180		396 - 456		180	BT50-SAS102-90	PLA396	CCMT120400	-								-
	BT50-TBH396-230		396 - 456		230	BT50-SAS102-140	PLA396	CCMT120400	-								-
	BT50-TBH396-280		396 - 456		280	BT50-SAS102-190	PLA396	CCMT120400	-								-
40	BT50-TBH456-180		456 - 516		180	BT50-SAS102-90	PLA456	CCMT120400	-								-
	BT50-TBH456-230		456 - 516		230	BT50-SAS102-140	PLA456	CCMT120400	-								-
	BT50-TBH456-280		456 - 516		280	BT50-SAS102-190	PLA456	CCMT120400	-								-
	BT50-TBH516-180		516 - 576		180	BT50-SAS102-90	PLA516	CCMT120400	-								-
	BT50-TBH516-230		516 - 576		230	BT50-SAS102-140	PLA516	CCMT120400	-								-
	BT50-TBH516-280		516 - 576		280	BT50-SAS102-190	PLA516	CCMT120400	-								-
	BT30-BCA13.5-105	P2779701	13.5 - 16		105	68	12	13.0	44	15	5	0.2	M1B2E/F	BRAZED TYPE	1	-	
	BT30-BCA14.5-105	P2779702	14.5 - 17		105	68	13	14.0	44	15	5	0.2	M1B2E/F	BRAZED TYPE	1	-	
	BT30-BCA16-105	P2779703	16 - 22.5		105	73	14	15	-	18	-	0.2	M1A2E/F	BRAZED TYPE	3	-	
	BT30-BCA19-120	P2779704	19 - 23		120	85	16	18	44	23	3	0.2	M2B2CC	CCGT0401	1	0.70	
	BT30-BCA23-135	P2779705	23 - 29		135	105	19	22	-	24	-	0.2	M3B2TC	TBGT0601	3	0.70	
	BT30-BCA29-150	P2779706	29 - 41		150	115	25	28	44	30	8	0.2	M3A2TC	TBGT0601	1	0.90	
	BT30-BCA29-195	P2779707	29 - 41		195	115	25	28	44	30	53	0.2	M3A2TC	TBGT0601	1	-	
	BT30-BCA38-150	P2779708	38 - 49		150	115	33	35	55	41	8	0.2	M5B2TC	TCGT1102	1	1.40	
	BT30-BCA38-210	P2779709	38 - 49		210	175	33	37	55	41	8	0.2	M5B2TC	TCGT1102	1	-	
	BT30-BCA46-150	P2779710	46 - 66		150	115	38	41	55	45	8	0.2	M5A2TC	TCGT1102	1	2.10	
40	BT30-BCA46-210	P2779711	46 - 66		210	175	38	45	55	45	8	0.2	M5A2TC	TCGT1102	1	-	
	BT30-BCA62-165	P2779712	62 - 87		165	135	51	-	-	-	-	0.2	M7A2TC	TCGT16T3	2	-	
	BT40-BCA13.5-105	P2779713	13.5 - 16		105	68	12	13.0	44	15	5	0.2	M1B2E/F	BRAZED TYPE	1	-	
	BT40-BCA14.5-105	P2779714	14.5 - 17		105	68	13	14.0	44	15	5	0.2	M1B2E/F	BRAZED TYPE	1	-	
	BT40-BCA16-105	P2779715	16 - 22.5		105	73	14	15	-	18	-	0.2	M1A2E/F	BRAZED TYPE	3	-	
	BT40-BCA19-120	P2779716	19 - 23		120	85	16	18	44	23	3	0.2	M2B2CC	CCGT0401	1	1.50	
	BT40-BCA23-135	P2779717	23 - 29		135	105	19	22	-	24	-	0.2	M3B2TC	TBGT0601	3	1.50	
	BT40-BCA29-150	P2779718	29 - 41		150	115	25	28	44	30	8	0.2	M3A2TC	TBGT0601	1	1.50	
	BT40-BCA29-195	P2779719	29 - 41		195	115	25	28	44	30	53	0.2	M3A2TC	TBGT0601	1	2.00	
	BT40-BCA38-150	P2779720	38 - 49		150	115	33	35	55	41	8	0.2	M5B2TC	TCGT1102	1	1.80	
	BT40-BCA38-210	P2779721	38 - 49		210	175	33	37	55	41	8	0.2	M5B2TC	TCGT1102	1	2.20	
	BT40-BCA46-150	P2779722	46 - 66		150	115	38	41	55	45	8	0.2	M5A2TC	TCGT1102	1	2.10	
	BT40-BCA46-210	P2779723	46 - 66		210	175	38	45	55	45	8	0.2	M5A2TC	TCGT1102	1	2.30	
	BT40-BCA62-165	P2779724	62 - 87		165	135	51	-	-	-	-	0.2	M7A2TC	TCGT16T3	2	2.90	
	BT40-BCA62-210	P2779725	62 - 87		210	180	51	-	-	-	-	0.2	M7A2TC	TCGT16T3	2	3.60	
	BT40-BCA83-150	P2779726	83 - 108		150	120	63	-	-	-	-	0.2	M7A2TC	TCGT16T3	2	-	
	BT40-BCA83-210	P2779727	83 - 108		210	180	63	-	-	-	-	0.2	M7A2TC	TCGT16T3	2	-	
	BT40-BCA98-150	P2779728	98 - 142		150	120	83	-	-	85	-	0.2	M10A2TC	TCGT16T3	4	-	
▶ NEXT PAGE																	

D278

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D279

STRAIGHT-ST

Unit : mm

TAPER No.	MODEL No.	EDP No.	D (BORE RANGE)	L1	L2	M1	C1	C2	UNIT	FIG.	WEIGHT (Kg)
			Min. - Max.								
32	ST32-BCA13.5-75	P2779760	13.5 - 16	135	75	67	12	13	M1B2E/F	1	0.50
	ST32-BCA14.5-75	P2779761	14.5 - 17	145	75	67	12	14	M1B2E/F	1	0.50
	ST32-BCA16-90	P2779762	16 - 22.5	160	90	82	14	15	M1A2E/F	1	0.50
	ST32-BCA19-90	P2779763	19 - 23.0	160	90	82	16	18	M2B-2CC	1	0.50
	ST32-BCA23-120	P2779764	23 - 29.0	190	120	110	19	22	M3B-2TC	1	1.00
	ST32-BCA29-120	P2779765	29 - 41.0	190	120	110	25	28	M3A-2TC	1	1.00
	ST32-BCA38-120	P2779766	38 - 49.0	190	120	115	33	35	M5B-2TC	2	1.50
	ST32-BCA46-120	P2779767	46 - 66	190	120	115	38	-	M5A-2TC	2	1.50
	ST32-BCA62-120	P2779768	62 - 87.0	190	120	115	51	-	M7A-2TC	2	2.50
42	ST42-BCA13.5-85	P2779769	13.5 - 16	165	85	67	12	13	M1B2E/F	1	1.00
	ST42-BCA14.5-85	P2779770	14.5 - 17	165	85	67	12	14	M1B2E/F	1	1.00
	ST42-BCA16-100	P2779771	16 - 22.5	180	100	82	14	15	M1A2E/F	1	1.00
	ST42-BCA19-100	P2779772	19 - 23.0	180	100	82	16	18	M2B2E/F	1	1.00
	ST42-BCA23-120	P2779773	23 - 29.0	200	120	110	19	22	M3B-2TC	1	1.50
	ST42-BCA29-120	P2779774	29 - 41.0	200	120	110	25	28	M3A-2TC	1	1.50
	ST42-BCA38-130	P2779775	38 - 49.0	210	130	125	33	35	M5B-2TC	1	1.50
	ST42-BCA46-135	P2779776	46 - 66.0	215	135	130	38	44	M5A-2TC	1	1.50
	ST42-BCA62-135	P2779777	62 - 87.0	215	135	130	51	-	M7A-2TC	2	2.50
	ST42-BCA83-150	P2779778	83 - 108	230	150	145	63	-	M7A-2TC	2	3.00

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SQUARE BORING
BAR

BSA

SQUARE BORING BAR (45°)

VIERKANT - BOHRSTANGE
BARRE D'ALÉSAGE CARRÉ
BARRA PORTA TESTINE
BARRAS DE MANDRINAR CUADRADAS

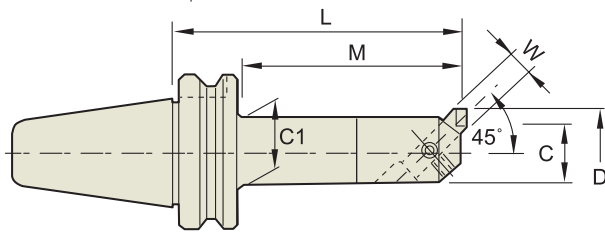

JIS
B6339-
BT

AT3

A

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS




SQUARE BORING
BAR

BSB

SQUARE BORING BAR (90°)

VIERKANT - BOHRSTANGE
BARRE D'ALÉSAGE CARRÉ
BARRA PORTA TESTINE
BARRAS DE MANDRINAR CUADRADAS

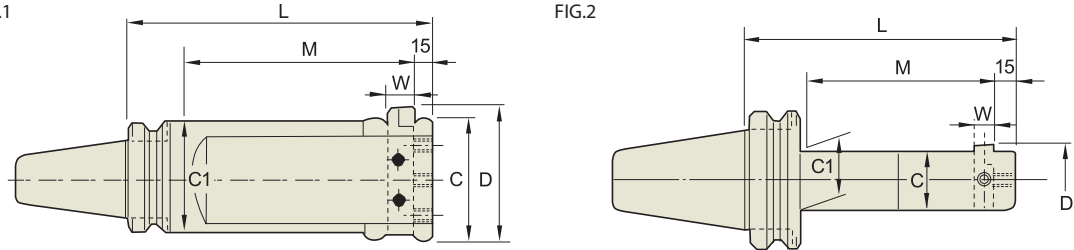

JIS
B6339-
BT

AT3

A

BT (JIS B6339/MAS 403)										Unit : mm	
TAPER No.	MODEL No.	EDP No.	D (BORE RANGE)	L	C	C1	W	M	WEIGHT (Kg)		
			Min. - Max.								
30	BT30-BSA25-120	P2775401	25 - 38	120	20	22	8	90	1.00		
	BT30-BSA30-135	P2775402	30 - 42	135	24	26	8	105	1.10		
	BT30-BSA38-150	P2775403	38 - 52	150	30	33	10	120	1.40		
	BT30-BSA42-150	P2775404	42 - 56	150	34	37	10	125	1.60		
	BT30-BSA50-150	P2775405	50 - 65	150	40	44	13	125	1.80		
40	BT40-BSA25-135	P2775406	25 - 38	135	20	22	8	108	1.30		
	BT40-BSA30-165	P2775407	30 - 42	165	24	26	8	138	1.50		
	BT40-BSA38-180	P2775408	38 - 52	180	30	33	10	153	1.80		
	BT40-BSA42-210	P2775409	42 - 56	210	34	37	10	183	2.30		
	BT40-BSA50-180	P2775410	50 - 65	180	40	44	13	153	2.40		
	BT40-BSA50-225	P2775411	50 - 65	225	40	44	13	198	2.90		
	BT40-BSA62-180	P2775412	62 - 90	180	50	54	16	153	3.20		
	BT40-BSA62-240	P2775413	62 - 90	240	50	54	16	213	4.20		
	BT40-BSA72-180	P2775414	72 - 110	180	60	63	19	153	4.40		
	BT40-BSA72-240	P2775415	72 - 110	240	60	63	19	213	5.70		
	BT40-BSA90-180	P2775416	90 - 125	180	75	63	19	153	5.40		
	BT50-BSA25-135	P2775417	25 - 38	135	20	22	8	95	4.40		
50	BT50-BSA30-165	P2775418	30 - 42	165	24	26	8	125	4.60		
	BT50-BSA38-180	P2775419	38 - 52	180	30	33	10	140	4.80		
	BT50-BSA42-210	P2775420	42 - 56	210	34	37	10	170	5.00		
	BT50-BSA50-180	P2775421	50 - 65	180	40	44	13	140	5.40		
	BT50-BSA50-240	P2775422	50 - 65	240	40	44	13	200	5.70		
	BT50-BSA62-195	P2775423	62 - 90	195	50	54	16	155	6.10		
	BT50-BSA62-270	P2775424	62 - 90	270	50	54	16	230	7.50		
	BT50-BSA72-195	P2775425	72 - 110	195	60	66	19	155	6.90		
	BT50-BSA72-285	P2775426	72 - 110	285	60	66	19	245	9.30		
	BT50-BSA90-210	P2775427	90 - 125	210	75	80	19	170	9.20		
	BT50-BSA90-300	P2775428	90 - 125	300	75	80	19	260	12.30		
	BT50-BSA105-195	P2775429	105 - 160	195	90	90	25	157	10.50		
	BT50-BSA105-285	P2775430	105 - 160	285	90	90	25	247	14.80		

BT (JIS B6339/MAS 403)										Unit : mm	
TAPER No.	MODEL No.	EDP No.	D (BORE RANGE)	L	C	C1	W	M	WEIGHT (Kg)	FIG.	
			Min. - Max.								
30	BT30-BSB25-120	P2775431	25 - 50	120	20	22	8	90	1.10	1	
	BT30-BSB38-150	P2775432	38 - 70	150	30	33	10	120	1.50	1	
	BT30-BSB50-150	P2775433	50 - 90	150	40	44	13	125	2.20	1	
40	BT40-BSB25-135	P2775434	25 - 50	135	20	22	8	108	1.30	1	
	BT40-BSB38-180	P2775435	38 - 70	180	30	33	10	153	1.90	1	
	BT40-BSB50-180	P2775436	50 - 90	180	40	44	13	153	2.60	1	
	BT40-BSB50-225	P2775437	50 - 90	225	40	44	13	198	3.10	1	
	BT40-BSB62-180	P2775438	62 - 115	180	50	56	16	153	3.40	1	
	BT40-BSB62-225	P2775439	62 - 115	225	50	56	16	198	4.10	1	
	BT40-BSB72-180	P2775440	72 - 135	180	60	66	19	153	4.70	1	
	BT40-BSB72-225	P2775441	72 - 135	225	60	66	19	198	5.60	1	
	BT40-BSB90-180	P2775442	90 - 150	180	75	80	19	153	5.70	1	
	BT40-BSB90-225	P2775443	90 - 150	225	75	80	19	198	6.60	1	
50	BT50-BSB25-135	P2775444	25 - 50	135	20	22	8	95	4.10	1	
	BT50-BSB38-180	P2775445	38 - 70	180	30	33	10	140	4.80	1	
	BT50-BSB50-180	P2775446	50 - 90	180	40	44	13	140	5.50	1	
	BT50-BSB50-240	P2775447	50 - 50	240	40	44	13	200	5.70	1	
	BT50-BSB62-195	P2775448	62 - 115	195	50	56	16	155	6.40	1	
	BT50-BSB62-270	P2775449	62 - 115	270	50	56	16	230	7.90	1	
	BT50-BSB72-195	P2775450	72 - 135	195	60	66	19	155	7.30	1	
	BT50-BSB72-285	P2775451	72 - 135	285	60	66	19	245	9.60	1	
	BT50-BSB90-210	P2775452	90 - 150	210	75	80	19	170	9.60	1	
	BT50-BSB90-300	P2775453	90 - 150	300	75	80	19	260	12.60	1	
	BT50-BSB105-195	P2775454	105 - 190	195	90	-	25	155	11.10	2	
	BT50-BSB105-285	P2775455	105 - 190	285	90	94	25	245	15.40	2	

D286

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 YG-1 CO., LTD.


phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D287




PART

SQUARE BITE

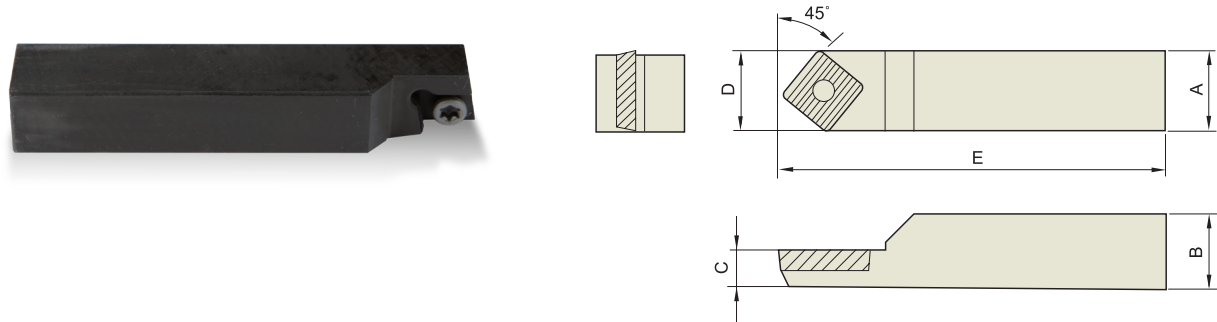

Unit : mm

SIZE	CLASSIFICATION							
	A	B	C	D	E	SCREW	WRENCH	INSERT
SBC08-45	8	8	6.3	8.39	70	SSB-2506	T7	CCMT0602
SBC10-45	10	10	7	10.39	70	SSB-2506	T7	CCMT0602
SBC13-45	13	13	10	13.6	80	SSB-4009	T15	CCMT09T3
SBC16-45	16	16	11	16.68	100	SSB-5012	T15	CCMT1204
SBC19-45	19	19	11	19.68	100	SSB-5012	T15	CCMT1204
SBC25-45	25	25	12.5	25.68	120	SSB-5012	T15	CCMT1204

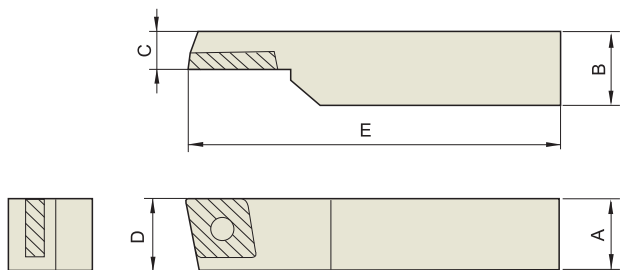

Unit : mm

SIZE	CLASSIFICATION							
	A	B	C	D	E	SCREW	WRENCH	INSERT
SBC10-90	10	10	7	10.4	70	SSB-2506	T7	CCMT0602
SBC13-90	13	13	10	13.6	80	SSB-4009	T15	CCMT09T3
SBC16-90	16	16	11	16.7	100	SSB-5012	T15	CCMT1204
SBC19-90	19	19	11	19.7	100	SSB-5012	T15	CCMT1204
SBC25-90	25	25	12.5	25.7	120	SSB-5012	T15	CCMT1204

YG-1 TOOLING SYSTEM

ACCESSORY & PARTS



HYDRAULIC CHUCK TEST PIECE

HYDRAULIC CHUCK COLLET

SHRINK FIT HEATING MACHINE

ER COLLET

TAP ER COLLET

ER NUT & SPANNER

SIDE LOCK BOLT FOR EMH

COLLAR BOLT & DRIVE KEY FOR SMA

DRIVE KEY & MOUNTING BOLT FOR FMA

MILLING CHUCK COLLET & SPANNER

SK COLLET, NUT, SPANNER

TAP ADAPTOR FOR TAPPING CHUCK

PULL STUD BOLT & SPANNER


TOOL CLAMP, HEIGHT PRESETTER

COOLANT TUBE & SPANNER FOR HSK

ADJUST BOLT MQL1 FOR HSK



COLLET (REDUCTION SLEEVE : COOLANT FLUSH TYPE)

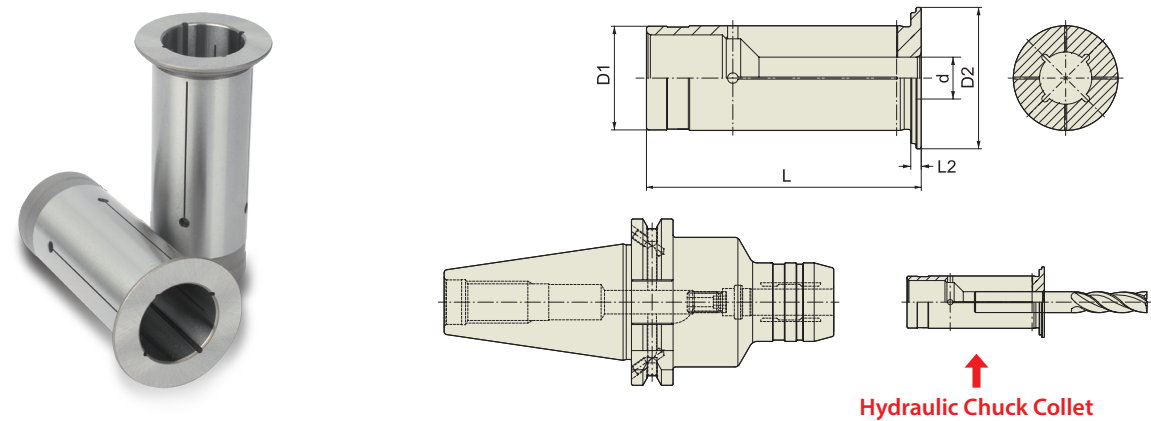

MODEL No.							EDP No.	d	D1	D2	L	L2	Unit : mm
HF12	3	P2771201	3	12	19	47	2						
	4	P2771202	4	12	19	47	2						
	5	P2771203	5	12	19	47	2						
	6	P2771204	6	12	19	47	2						
	7	P2771205	7	12	19	47	2						
	8	P2771206	8	12	19	47	2						
HF20	3	P2771207	3	20	27	52.5	2						
	4	P2771208	4	20	27	52.5	2						
	5	P2771209	5	20	27	52.5	2						
	6	P2771210	6	20	27	52.5	2						
	7	P2771211	7	20	27	52.5	2						
	8	P2771212	8	20	27	52.5	2						
	9	P2771213	9	20	27	52.5	2						
	10	P2771214	10	20	27	52.5	2						
	11	P2771215	11	20	27	52.5	2						
	12	P2771216	12	20	27	52.5	2						
	13	P2771217	13	20	27	52.5	2						
	14	P2771218	14	20	27	52.5	2						
	15	P2771219	15	20	27	52.5	2						
	16	P2771220	16	20	27	52.5	2						
HF32	6	P2771221	6	32	39	63.5	3						
	8	P2771222	8	32	39	63.5	3						
	10	P2771223	10	32	39	63.5	3						
	12	P2771224	12	32	39	63.5	3						
	14	P2771225	14	32	39	63.5	3						
	16	P2771226	16	32	39	63.5	3						
	18	P2771227	18	32	39	63.5	3						
	20	P2771228	20	32	39	63.5	3						
	25	P2771229	25	32	39	63.5	3						

- ▶ Inch type products are available.
- ▶ Other special sizes of Hydraulic Chuck collets could be produced and supplied.

Feature HF Hydraulic Chuck collet (reduction sleeve) is for internal coolant flush.

Chucking Method Please assemble cutting tool with collet firstly, and then insert collet into Hydraulic Chuck.

TOOLING
SYSTEM



ER COLLET
CHUCK

GER

ER COLLET - GER (ULTRA PRECISION)

ER SPANNZANGE - GER
ER PINCE DE SERRAGE - GER
ER PINZA DI SERRAGGIO - GER
ER PINZA PORTAPIEZAS - GER



GER 11			GER 20			GER 32			GER 40		
CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.
3.0 - 2.5	111030	P2772405	3.0 - 2.0	120030	P2772427	3.0 - 2.0	132030	P2772459	3.0 - 2.0	140030	P2772552
3.5 - 3.0	111035	P2772406	4.0 - 3.0	120040	P2772428	4.0 - 3.0	132040	P2772460	4.0 - 3.0	140040	P2772479
4.0 - 3.5	111040	P2772407	5.0 - 4.0	120050	P2772429	5.0 - 4.0	132050	P2772461	5.0 - 4.0	140050	P2772480
4.5 - 4.0	111045	P2772408	6.0 - 5.0	120060	P2772430	6.0 - 5.0	132060	P2772462	6.0 - 5.0	140060	P2772481
5.0 - 4.5	111050	P2772409	7.0 - 6.0	120070	P2772431	7.0 - 6.0	132070	P2772463	7.0 - 6.0	140070	P2772482
5.5 - 4.0	111055	P2772410	8.0 - 7.0	120080	P2772432	8.0 - 7.0	132080	P2772464	8.0 - 7.0	140080	P2772483
6.0 - 5.5	111060	P2772411	9.0 - 8.0	120090	P2772433	9.0 - 8.0	132090	P2772465	9.0 - 8.0	140090	P2772484
6.5 - 6.0	111065	P2772412	10.0 - 9.0	120100	P2772434	10.0 - 9.0	132100	P2772466	10.0 - 9.0	140100	P2772485
7.0 - 6.5	111070	P2772413	11.0 - 10.0	120110	P2772435	11.0 - 10.0	132110	P2772467	11.0 - 10.0	140110	P2772486
			12.0 - 11.0	120120	P2772436	12.0 - 11.0	132120	P2772468	12.0 - 11.0	140120	P2772487
			13.0 - 12.0	120130	P2772437	13.0 - 12.0	132130	P2772469	13.0 - 12.0	140130	P2772488
						14.0 - 13.0	132140	P2772470	14.0 - 13.0	140140	P2772489
						15.0 - 14.0	132150	P2772471	15.0 - 14.0	140150	P2772490
						16.0 - 15.0	132160	P2772472	16.0 - 15.0	140160	P2772491
						17.0 - 16.0	132170	P2772473	17.0 - 16.0	140170	P2772492
						18.0 - 17.0	132180	P2772474	18.0 - 17.0	140180	P2772493
						19.0 - 18.0	132190	P2772475	19.0 - 18.0	140190	P2772494
						20.0 - 19.0	132200	P2772476	20.0 - 19.0	140200	P2772495
									21.0 - 20.0	140210	P2772496
									22.0 - 21.0	140220	P2772497
									23.0 - 22.0	140230	P2772498
									24.0 - 23.0	140240	P2772499
									25.0 - 24.0	140250	P2772500
									26.0 - 25.0	140260	P2772551
									27.0 - 26.0	140270	P2772553
									28.0 - 27.0	140280	P2772554
									29.0 - 28.0	140290	P2772555
									30.0 - 29.0	140300	P2772556

GER 16			GER 25		
CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.
3.0 - 2.0	116030	P2772416	3.0 - 2.0	125030	P2772442
4.0 - 3.0	116040	P2772417	4.0 - 3.0	125040	P2772443
5.0 - 4.0	116050	P2772418	5.0 - 4.0	125050	P2772444
6.0 - 5.0	116060	P2772419	6.0 - 5.0	125060	P2772445
7.0 - 6.0	116070	P2772420	7.0 - 6.0	125070	P2772446
8.0 - 7.0	116080	P2772421	8.0 - 7.0	125080	P2772447
9.0 - 8.0	116090	P2772422	9.0 - 8.0	125090	P2772448
10.0 - 9.0	116100	P2772423	10.0 - 9.0	125100	P2772449
			11.0 - 10.0	125110	P2772450
			12.0 - 11.0	125120	P2772451
			13.0 - 12.0	125130	P2772452
			14.0 - 13.0	125140	P2772453
			15.0 - 14.0	125150	P2772454
			16.0 - 15.0	125160	P2772455

TOOLING
SYSTEM



ER COLLET
CHUCK

ER HP

ER COLLET (HIGH PRECISION)

ER SPANNZANGE - HP
ER PINCE DE SERRAGE - HP
ER PINZA DI SERRAGGIO - HP
ER PINZA PORTAPIEZAS - HP



ER 8 HP			ER 11 HP			ER 16 HP			ER 20 HP		
CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.	CLAMPING RANGE	CODE No.	EDP No.
1.0 - 0.5	208010H	P2506292H	1.0 - 0.5	211010H	P2506311H	1.0 - 0.5	216010H	P2506201H	2.0 - 1.0	220020H	P2506332H
1.5 - 1.0	208015H	P2506293H	1.5 - 1.0	211015H	P2506312H	2.0 - 1.0	216020H	P2506202H	3.0 - 2.0	220030H	P2506333H
2.0 - 1.5	208020H	P2506294H	2.0 - 1.5	211020H	P2506313H	3.0 - 2.0	216030H	P2506203H	4.0 - 3.0	220040H	P2506334H
2.5 - 2.0	208025H	P2506295H	2.5 - 2.0	211025H	P2506314H	4.0 - 3.0	216040H	P2506204H	5.0 - 4.0	220050H	P2506335H
3.0 - 2.5	208030H	P2506296H	3.0 - 2.5	211030H	P2506315H	5.0 - 4.0	216050H	P2506205H	6.0 - 5.0	220060H	P2506336H
3.5 - 3.0	208035H	P2506297H	3.5 - 3.0	211035H	P2506316H	6.0 - 5.0	216060H	P2506206H	7.0 - 6.0	220070H	P2506337H
4.0 - 3.5	208040H	P2506298H	4.0 - 3.5	211040H	P2506317H	7.0 - 6.0	216070H	P2506207H	8.0 - 7.0	220080H	P2506338H
4.5 - 4.0	208045H	P2506299H	4.5 - 4.0	211045H	P2506318H	8.0 - 7.0	216080H	P2506208H	9.0 - 8.0	220090H	P2506339H
5.0 - 4.5	208050H	P2506300H	5.0 - 4.5	211050H	P2506319H	9.0 - 8.0	216090H	P2506209H	10.0 - 9.0	220100H	P2506340H
			5.5 - 5.0	211055H	P2506320H	10.0 - 9.0	216100H	P2506210H	11.0 - 10.0	220120H	P2506341H
			6.0 - 5.5	211060H	P2506321H	1.5 - 1.0	216015H	P2778506H	12.0 - 11.0	220130H	P2506342H
			6.5 - 6.0	211065H	P2506322H	2.5 - 2.0	216025H	P2778507H	13.0 - 12.0	220140H	P2506343H
			7.0 - 6.5	211070H	P2506323H				1.0 - 0.5	220010H	P2506344H
STANDARD SET	208000H	P2506301H	STANDARD SET	211000H	P2506302H	STANDARD SET	216000H	P2506303H	STANDARD SET	220000H	P2506304H
Ø1.0 - 5.0mm			Ø1.0 - 7.0mm			Ø1.0 - 10.0mm			Ø2.0 - 13.0mm		
9pcs			13pcs			10pcs			12pcs		
WOODEN TRAY ZWT 8	108110		WOODEN TRAY ZWT 11	11110		WOODEN TRAY ZWT 16	016110		WOODEN TRAY ZWT 20	020110	

► Inch type collets are available.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



ER COLLET
CHUCK

ERS


SEALED ER COLLET

VERSIEGELT ER SPANNZANGE

SCELLÉ ER PINCE DE SERRAGE

SIGILLATO ER PINZA DI SERRAGGIO

SELLADO ER PINZA PORTAPIEZAS



◇ Rubber Sealed

Unit : mm

ER 25S		ER 32S		ER 40S		ER 50S	
CLAMPING RANGE	EDP No.	CLAMPING RANGE	EDP No.	CLAMPING RANGE	EDP No.	CLAMPING RANGE	EDP No.
3.0	P2506213S	3.0	P2506233S	3.0	P2506287S	6.0	P2778515S
4.0	P2506214S	4.0	P2506234S	4.0	P2506264S	8.0	P2778516S
5.0	P2506215S	5.0	P2506235S	5.0	P2506265S	10.0	P2778517S
6.0	P2506216S	6.0	P2506236S	6.0	P2506266S	12.0	P2506352S
7.0	P2506217S	7.0	P2506237S	7.0	P2506267S	14.0	P2506354S
8.0	P2506218S	8.0	P2506238S	8.0	P2506268S	16.0	P2506356S
9.0	P2506219S	9.0	P2506239S	9.0	P2506269S	18.0	P2506358S
10.0	P2506220S	10.0	P2506240S	10.0	P2506270S	20.0	P2506360S
11.0	P2506221S	11.0	P2506241S	11.0	P2506271S	22.0	P2506362S
12.0	P2506222S	12.0	P2506242S	12.0	P2506272S	24.0	P2506364S
13.0	P2506223S	13.0	P2506243S	13.0	P2506273S	25.0	P2778518S
14.0	P2506224S	14.0	P2506244S	14.0	P2506274S	26.0	P2506366S
15.0	P2506225S	15.0	P2506245S	15.0	P2506275S	28.0	P2506368S
16.0	P2506226S	16.0	P2506246S	16.0	P2506276S	30.0	P2506370S
-		17.0	P2506247S	18.0	P2506277S	32.0	P2506372S
-		18.0	P2506248S	19.0	P2506278S	34.0	P2506374S
-		19.0	P2506249S	20.0	P2506279S	-	
-		20.0	P2506250S	21.0	P2506280S	-	
-		-		22.0	P2506281S	-	
-		-		23.0	P2506282S	-	
-		-		24.0	P2506283S	-	
-		-		17.0	P2506284S	-	
-		-		25.0	P2506285S	-	
-		-		26.0	P2506286S	-	
-		-		-		-	
STANDARD SET	P2506305S	STANDARD SET	P2506306S	STANDARD SET	P2506307S	STANDARD SET	P2506308S
Ø3.0 - 16.0mm		Ø3.0 - 20.0mm		Ø4.0 - 26.0mm		Ø12.0 - 34.0mm	
14pcs		18pcs		24pcs		16pcs	
WOODEN TRAY ZWT 25		WOODEN TRAY ZWT 32		WOODEN TRAY ZWT 40		WOODEN TRAY ZWT 50	

► Inch type collets are available.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



ER COLLET
CHUCK

RDT


TAP ER COLLET (JIS)

ER SPANNZANGE - FÜR GEWINDESCHNEID

ER PINCE DE SERRAGE - POUR TARAUDER

ER PINZA DI SERRAGGIO - PER MASCHIARE

ER PINZA PORTAPIEZAS - PARA HILO

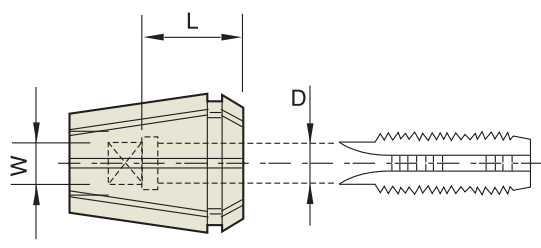

■ Below standard Tap ER Collet conforms to JIS.

Unit : mm

	RDT 16				RDT 20				RDT 25				RDT 32				RDT 40			
TAP	D(Ø)	W(□)	L	EDP No.	D(Ø)	W(□)	L	EDP No.	D(Ø)	W(□)	L	EDP No.	D(Ø)	W(□)	L	EDP No.	D(Ø)	W(□)	L	EDP No.
M2	3.0	2.5	15	P2772501																
M3	4.0	3.2	15	P2772502	4.0	3.2	15	P2772507	4.0	3.2	15	P2772513								
M4	5.0	4.0	15	P2772503	5.0	4.0	15	P2772508	5.0	4.0	15	P2772514	5.0	4.0	15	P2772521				
M5	5.5	4.5	15	P2772504	5.5	4.5	15	P2772509	5.5	4.5	15	P2772515	5.5	4.5	15	P2772522				
M6	6.0	4.5	15	P2772505	6.0	4.5	15	P2772510	6.0	4.5	15	P2772516	6.0	4.5	15	P2772523				
M8	6.2	5.0	15	P2772506	6.2	5.0	20	P2772511	6.2	5.0	20	P2772517	6.2	5.0	20	P2772524	6.2	5.0	20	P2772530
M10					7.0	5.5	20	P2772512	7.0	5.5	20	P2772518	7.0	5.5	20	P2772525	7.0	5.5	20	P2772531
M12									8.5	6.5	20	P2772519	8.5	6.5	20	P2772526	8.5	6.5	25	P2772532
M14									10.5	8.0	20	P2772520	10.5	8.0	20	P2772527	10.5	8.0	25	P2772533
M16													12.5	10.0	20	P2772528	12.5	10.0	25	P2772534
M18													14.0	11.0	20	P2772529	14.0	11.0	25	P2772535
M20																	15.0	12.0	28	P2772536
M22																	17.0	13.0	28	P2772537
M24																	19.0	15.0	28	P2772538

► Inch type collets are available.

ER COLLET
CHUCK

PART

ER NUT
ER NUSS
ER ÉCROU
ER DADO
ERTUERCA



■ XSQ-RT (Sealing Disk Type : Hex.)Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RT16	P2777009	M22×1.50	28.0	22.5
XSQ-RT20	P2777010	M25×1.50	34.0	24.0



■ XSQ-RUT (Sealing Disk Type : Round)Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RUT16	P2777011	M22×1.50	32.0	22.5
XSQ-RUT20	P2777012	M25×1.50	35.0	24.0
XSQ-RUT25	P2777013	M32×1.50	42.0	25.0
XSQ-RUT32	P2777014	M40×1.50	50.0	27.5
XSQ-RUT40	P2777015	M50×1.50	63.0	30.5



■ XSQ-RSU (Sleeve Bearing Type)Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RSU16	P2777016	M22×1.50	32.0	18.0
XSQ-RSU20	P2777017	M25×1.50	35.0	20.0
XSQ-RSU25	P2777018	M32×1.50	42.0	20.5
XSQ-RSU32	P2777019	M40×1.50	50.0	23.0
XSQ-RSU40	P2777020	M50×1.50	63.0	26.0



■ XSQ-RST (Sleeve Bearing / Sealing Disk Type : Hex.)Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RST16	P2777021	M22×1.50	28.0	22.5
XSQ-RST20	P2777022	M25×1.50	34.0	24.5




■ XSQ-RSUT (Sleeve Bearing / Sealing Disk Type : Round)Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RSUT16	P2777023	M22×1.50	32.0	22.5
XSQ-RSUT20	P2777024	M25×1.50	35.0	24.5
XSQ-RSUT25	P2777025	M32×1.50	42.0	25.0
XSQ-RSUT32	P2777026	M40×1.50	50.0	27.5
XSQ-RSUT40	P2777027	M50×1.50	63.0	30.5

ER COLLET
CHUCK


PART

ER NUT
ER NUSS
ER ÉCROU
ER DADO
ERTUERCA



■ XSQ-RM (Mini Nut : Standard Type)Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-R08M	P2777038	M10×0.75	12.0	11.0
XSQ-R11M	P2777039	M13×0.75	16.0	12.0
XSQ-R16M	P2777040	M19×1.00	22.0	18.0
XSQ-R20M	P2777041	M24×1.00	28.0	19.5
XSQ-R25M	P2777042	M30×1.00	35.0	20.5



■ XSQ-RTM (Mini Nut : Sealing Disk Type)Unit : mm


MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RT16M	P2777043	M19×1.00	22.0	22.5
XSQ-RT20M	P2777044	M24×1.00	28.0	24.0
XSQ-RT25M	P2777045	M30×1.00	35.0	25.0

YG ER COLLET CHUCK

PART/DS

ER NUT & SEALING DISK


ER NUSS
ER ÉCROU
ER DADO
ERTUERCA



■ XSQ-RA (External Thread Type)

Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RA11	P2777046	M18×1.00	18.0	6.0
XSQ-RA16	P2777047	M24×1.00	24.0	8.0
XSQ-RA20	P2777048	M28×1.50	28.0	11.0
XSQ-RA25	P2777049	M32×1.50	32.0	12.5



■ XSQ-RAT (External Thread / Sealing Disk Type)

Unit : mm

MODEL No.	EDP No.	THREAD	Dia.	LENGTH
XSQ-RAT16	P2777052	M24×1.00	24.0	11.0
XSQ-RAT20	P2777053	M28×1.50	28.0	12.5
XSQ-RAT25	P2777054	M32×1.50	32.0	14.0
XSQ-RAT32	P2777001	M40×1.50	40.0	17.5

* Without sealing disk



■ SEALING DISK

Unit : mm

MODEL No.	EDP No.	Dia.	INNER DIA. (Step : 0.5mm)	THICKNESS
DS16	P2777055	13.0	2.5 - 10	4.0
DS20	P2777056	16.0	2.5 - 13.0	4.0
DS25	P2777057	21.0	2.5 - 16.0	4.0
DS32	P2777058	27.0	2.5 - 20.0	4.0
DS40	P2777059	33.5	2.5 - 26.0	4.0
DS50	P2777060	31.0	3.5 - 25.0	4.0

■ SEALING DISK SET

Unit : mm

MODEL No.	EDP No.	Dia.	THICKNESS	INNER DIA. RANGE	SEALING DISKS / SET
DS16S2	P2777061	13.0	4.0	4.0 ~ 10.0	7pcs / set
DS20S2	P2777062	16.0	4.0	4.0 ~ 13.0	10pcs / set
DS25S2	P2777063	21.0	4.0	4.0 ~ 16.0	13pcs / set
DS32S2	P2777064	27.0	4.0	4.0 ~ 20.0	17pcs / set
DS40S2	P2777065	33.5	4.0	4.0 ~ 26.0	23pcs / set
DS50S2	P2777066	31.0	4.0	4.0 ~ 25.0	22pcs / set



YG ER COLLET CHUCK

SP

ER SPANNER / WRENCH

ER MAULSCHLÜSEL
ER CL
ER CHIAVE
ER LLAVE



FIG.1



FIG.2



■ FOR ER / SKN NUT

Unit : mm

MODEL No.	EDP No.	A	B	APPLICABLE NUT
ER11SP	P2772601	-	-	ER11
ER16SP	P2772602	50	160	ER16
ER20SP	P2772603	55	180	ER20 (FIG.1)
ER25SP	P2772604	65	210	ER25
ER32SP	P2772605	75	250	ER32 (FIG.2)
ER40SP	P2772606	90	290	ER40 (FIG.2)
ER50SP	P2772612	110	350	ER50 (FIG.2)

► Design and shape could be changed without prior notice.

■ FOR ER Mini NUT

Unit : mm

MODEL No.	EDP No.	A	B	APPLICABLE NUT
GE8M	P2772608	12.4	70	ER8M
GE11M	P2772609	16.8	90	ER11M
GE16M	P2772610	22.5	110	ER16M
GE20M	P2772611	29.0	120	ER20M
GE25M	P2772607	36.0	130	ER25M

► Design and shape could be changed without prior notice.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM



ACCESSORY
& PARTS

END MILL HOLDER &
SIDE LOCK ARBOR

PART

SIDE LOCK BOLT

ER NUSS
ER ÉCROU
ER DADO
ERTUERCA



Unit : mm						
EMH & SLA ID	EMH			SLA		
	M	EDP No.	L	M	EDP No.	L
6	M6x1.0	P2778088	10.5	M5x0.8	P2778079	8
8	M8x1.25	P2778089	10.5	M6x1.0	P2778080	10
10	M10x1.5	P2778090	12.5	M8x1.25	P2778081	12
12	M12x1.75	P2778091	16.5	M10x1.5	P2778082	14
14	M12x1.75	P2778092	15	M10x1.5	P2778082	14
16	M14x2.0	P2778093	16.5	M12x1.75	P2778083	12
18	M14x2.0	P2778093	16.5	-	-	-
20	M16x2.0	P2778094	16.5	M12x1.75	P2778084	16
25	M18x2.0	P2778095	20.5	M14x2.0	P2778085	14
32	M20x2.0	P2778096	20.5	M16x2.0	P2778086	16
40	M20x2.0	P2778096	20.5	M16x2.0	P2778086	16
42	-	-	-	M16x2.0	P2778086	16
50	M24x2.0	P2778098	25.5	-	-	-
50.8	-	-	-	M20x2.5	P2778087	25

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS

SHELL MILL
ARBOR




PART

COLLAR BOLT & DRIVE KEY

COLLAR BOLT

DRIVE KEY

KEY BOLT



Unit : mm							
SPIGOT Dia.	COLLAR BOLT			DRIVE KEY		KEY BOLT	
	SPEC.	EDP No.	Head Dia.(C)	SPEC.(W x H x L)	EDP No.	SPEC.	EDP No.
16	M8 x 1.25 x 16L	P2514051	20	8 x 7 x 12.8	P2778857	M3x0.5x10L	P2778875
22	M10 x 1.5 x 18L	P2514052	28	10 x 7.8 x 15.5	P2778858	M4x0.7x10L	P2778864
27	M12 x 1.75 x 22L	P2514053	35	12 x 9 x 18.5	P2778859	M5x0.8x12L	P2778865
32	M16 x 2.0 x 26L	P2514054	42	14 x 11.5 x 20.5	P2778860	M6x1.0x15L	P2778866
40	M20 x 2.5 x 30L	P2514055	52	16 x 13.5 x 23.5	P2778861	M6x1.0x15L	P2778866
50	M24 x 3.0 x 36L	P2514056	63	18 x 18 x 28.5	P2778862	M6x1.0x20L	P2778868

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YIG

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM


ACCESSORY
& PARTS





COMBI-SHELL
MILL ARBOR

PART

DRIVE RING, BOLT & KEY







SPIGOT Dia.	CLUTCH DRIVE RING		COLLAR BOLT			KEY	
	SPEC.	EDP No.	SPEC.	EDP No.	Head Dia.(C)	SPEC.(W x H x L)	EDP No.
16	#16	P2514063	M8×1.25×16	P2514051	20	4×4×20	P2514057
22	#22	P2514064	M10×1.5×18	P2514052	28	6×6×25	P2514058
27	#27	P2514065	M12×1.75×22	P2514053	35	7×7×25	P2514059
32	#32	P2514066	M16×2.0×26	P2514054	42	8×7×28	P2514060
40	#40	P2514067	M20×2.5×30	P2514055	52	10×8×32	P2514061
50	#50	P2514068	M24×3.0×36	P2514056	63	12×8×36	P2514062

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM


ACCESSORY
& PARTS



FACE MILL
ARBOR

PART

DRIVE KEY & MOUNTING BOLT

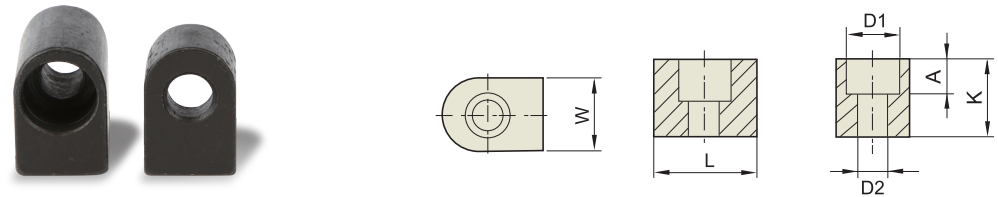

■ KEY

KEY	EDP No.	W	K	L	D1	D2	A	APPLICABLE ARBOR
9.52 x 9.52 x 10.2	P2774753	9.52	9.52	10.2	7.5	4.5	5.2	FMA25.4 / FMB25.4
9.5 x 12 x 11	P2774754	9.5	12	11	7.5	4.2	5	FMC25.4
10 x 10 x 11	P2774756	10	10	11	7.5	4.2	5	FMC22
12 x 13 x 18	P2774758	12	13	18	9	5.3	8	FMB27 / FMC27
12.7 x 12.7x 12.7	P2774760	12.7	12.7	12.7	8.7	5.5	6	FMA31.75
15.87 x 15.87x 18.5	P2774761	15.87	15.87	18.5	10.3	6.6	7.5	FMA38.1/ FMB40 / FMB40F
14 x 15 x 20	P2774762	14	15	20	10.5	6.3	7	FMC32
25.4 x 22.5 x 27	P2774773	25.4	22.5	27	16.5	10.5	11	FMA47.625 / FMB60
19.05 x 18 x 22	P2774774	19.05	18	22	14	8.6	9	FMA50.8

Unit : mm



■ MOUNTING BOLT

MOUNTING BOLT	EDP No.	M	D	D1	L	A	B	W	APPLICABLE ARBOR
MB8	P2774765	8 x 1.25	20	15	23	7	2	6	FMC16
MB10	P2774766	10 x 1.5	28	18	29	9	2	8	FMC22
MB12	P2774767	12 x 1.75	33	23	32	10	2	10	FMC27 / FMB27 / FMA25.4
MB16	P2774768	16 x 2.0	40	23	42	10	6	12	FMC32 / FMA31.75
MB20	P2774769	20 x 2.5	50	27	54	14	6	14	FMC40 / FMA38.1 / FMB40 / FMB40F
MB24	P2774770	24 x 3.0	65	37	62	14	10	17	FMA50.8

Unit : mm

D312

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

 YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

D313

TOOLING
SYSTEM


SK SLIM
CHUCK

SKC

SK COLLET

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO



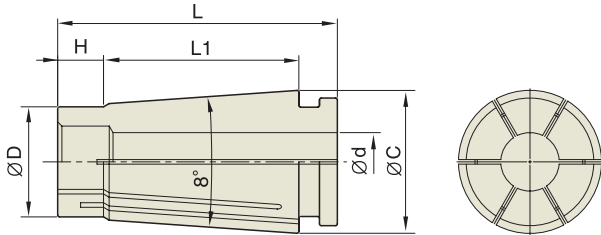

◇ T.I.R : ≤0.005mm at 3D

SKC16				SKC20				SKC25			
TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)	TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)	TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)
SKC16	SKC16-3	P2730810	2.75 - 3.0	SKC20	SKC20-4	P2730830	3.5 - 4.0	SKC25	SKC25-16.5	P2773677	16.0 - 16.5
	SKC16-3.5	P2773613	3.0 - 3.5		SKC20-4.5	P2773632	4.0 - 4.5		SKC25-17	P2773678	16.5 - 17.0
	SKC16-4	P2730812	3.5 - 4.0		SKC20-5	P2773633	4.5 - 5.0		SKC25-17.5	P2773679	17.0 - 17.5
	SKC16-4.5	P2773614	4.0 - 4.5		SKC20-5.5	P2773634	5.0 - 5.5		SKC25-18	P2773680	17.5 - 18.0
	SKC16-5	P2773615	4.5 - 5.0		SKC20-6	P2730832	5.5 - 6.0		SKC25-18.5	P2773681	18.0 - 18.5
	SKC16-5.5	P2773616	5.0 - 5.5		SKC20-6.5	P2773635	6.0 - 6.5		SKC25-19	P2773682	18.5 - 19.0
	SKC16-6	P2730814	5.5 - 6.0		SKC20-7	P2773636	6.5 - 7.0		SKC25-19.5	P2773683	19.0 - 19.5
	SKC16-6.5	P2773617	6.0 - 6.5		SKC20-7.5	P2773637	7.0 - 7.5		SKC25-20	P2773684	19.5 - 20.0
	SKC16-7	P2773618	6.5 - 7.0		SKC20-8	P2730834	7.5 - 8.0		SKC25-20.5	P2773685	20.0 - 20.5
	SKC16-7.5	P2773619	7.0 - 7.5		SKC20-8.5	P2773638	8.0 - 8.5		SKC25-21	P2773686	20.5 - 21.0
	SKC16-8	P2730816	7.5 - 8.0		SKC20-9	P2773639	8.5 - 9.0		SKC25-21.5	P2773687	21.0 - 21.5
	SKC16-8.5	P2773620	8.0 - 8.5		SKC20-9.5	P2773640	9.0 - 9.5		SKC25-22	P2773688	21.5 - 22.0
	SKC16-9	P2773621	8.5 - 9.0		SKC20-10	P2730836	9.5 - 10.0		SKC25-22.5	P2773689	22.0 - 22.5
	SKC16-9.5	P2773622	9.0 - 9.5		SKC20-10.5	P2773641	10.0 - 10.5		SKC25-23	P2773690	22.5 - 23.0
	SKC16-10	P2730818	9.5 - 10.0		SKC20-11	P2773642	10.5 - 11.0		SKC25-23.5	P2773691	23.0 - 23.5
SKC20	SKC16-10.5	P2773623	10.0 - 10.5		SKC20-11.5	P2773643	11.0 - 11.5		SKC25-24	P2773692	23.5 - 24.0
	SKC16-11	P2773624	10.5 - 11.0		SKC20-12	P2730838	11.5 - 12.0		SKC25-24.5	P2773693	24.0 - 24.5
	SKC16-11.5	P2773625	10.0 - 11.5		SKC20-12.5	P2773644	12.0 - 12.5		SKC25-25	P2773694	24.5 - 25.0
	SKC16-12	P2730820	11.5 - 12.0		SKC20-13	P2773645	12.5 - 13.0		SKC25-25.4	P2773695	25.0 - 25.4
	SKC16-12.5	P2773626	12.0 - 12.5		SKC20-13.5	P2773646	13.0 - 13.5				
	SKC16-13	P2773627	12.5 - 13.0		SKC20-14	P2730840	13.5 - 14.0				
	SKC16-13.5	P2773628	13.0 - 13.5		SKC20-14.5	P2773647	14.0 - 14.5				
	SKC16-14	P2773822	13.5 - 14.0		SKC20-15	P2773648	14.5 - 15.0				
	SKC16-14.5	P2773629	14.0 - 14.5		SKC20-15.5	P2773649	15.0 - 15.5				
	SKC16-15	P2773630	14.5 - 15.0		SKC20-16	P2730842	15.5 - 16.0				
	SKC16-15.5	P2773631	15.0 - 15.5		SKC20-16.5	P2773650	16.0 - 16.5				
	SKC16-16	P2730824	15.5 - 16.0		SKC20-17	P2773651	16.5 - 17.0				
					SKC20-17.5	P2773652	17.0 - 17.5				
					SKC20-18	P2730844	17.5 - 18.0				
					SKC20-18.5	P2773653	18.0 - 18.5				
					SKC20-19	P2773654	18.5 - 19.0				
					SKC20-19.5	P2773655	19.0 - 19.5				
					SKC20-20	P2730846	19.5 - 20.0				

TOOLING
SYSTEM


SK SLIM
CHUCK

PART

SK NUT & SPANNER

SKN NUSS
SKN ÉCROU
SKN DADO
SKN TUERCA



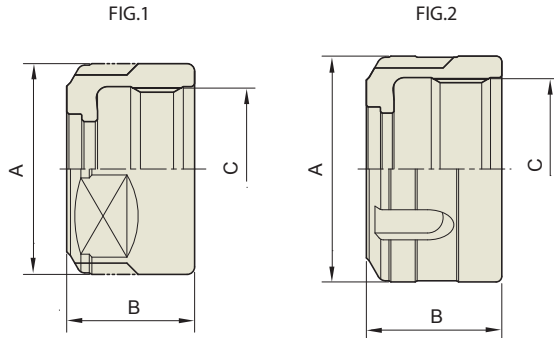

Unit : mm						
TYPE	MODEL No.	A	B	C	FIG.	WEIGHT (Kg)
SKN06	P2773581	20	15	M15.5 x 1.0	1	0.02
SKN10	P2773582	28	17	M21.5 x 1.0	1	0.04
SKN13	P2773583	33	21	M27 x 1.0	2	0.05
SKN16	P2773584	40	24	M32 x 1.5	2	0.06
SKN20	P2773585	48.5	24	M40 x 1.0	2	0.08
SKN25	P2773586	55	30	M45 x 1.5	2	0.10



MODEL No.	MODEL No.
TSK6	P2773588
TSK10	P2773589
TSK13	P2773590
TSK16	P2773591
TSK20	P2773587
TSK25	P2773592

► Design and shape could be changed without prior notice.

TOOLING
SYSTEM


SK SLIM
CHUCK

PART

SK COLLET

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO



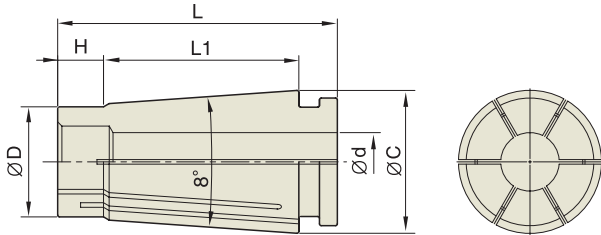

◇ T.I.R : ≤0.005mm at 3D

SKC16				SKC20				SKC25			
TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)	TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)	TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)
SKC16	SKC16-3	P2730810	2.75 - 3.0	SKC20	SKC20-4	P2730830	3.5 - 4.0	SKC25	SKC25-16.5	P2773677	16.0 - 16.5
	SKC16-3.5	P2773613	3.0 - 3.5		SKC20-4.5	P2773632	4.0 - 4.5		SKC25-17	P2773678	16.5 - 17.0
	SKC16-4	P2730812	3.5 - 4.0		SKC20-5	P2773633	4.5 - 5.0		SKC25-17.5	P2773679	17.0 - 17.5
	SKC16-4.5	P2773614	4.0 - 4.5		SKC20-5.5	P2773634	5.0 - 5.5		SKC25-18	P2773680	17.5 - 18.0
	SKC16-5	P2773615	4.5 - 5.0		SKC20-6	P2730832	5.5 - 6.0		SKC25-18.5	P2773681	18.0 - 18.5
	SKC16-5.5	P2773616	5.0 - 5.5		SKC20-6.5	P2773635	6.0 - 6.5		SKC25-19	P2773682	18.5 - 19.0
	SKC16-6	P2730814	5.5 - 6.0		SKC20-7	P2773636	6.5 - 7.0		SKC25-19.5	P2773683	19.0 - 19.5
	SKC16-6.5	P2773617	6.0 - 6.5		SKC20-7.5	P2773637	7.0 - 7.5		SKC25-20	P2773684	19.5 - 20.0
	SKC16-7	P2773618	6.5 - 7.0		SKC20-8	P2730834	7.5 - 8.0		SKC25-20.5	P2773685	20.0 - 20.5
	SKC16-7.5	P2773619	7.0 - 7.5		SKC20-8.5	P2773638	8.0 - 8.5		SKC25-21	P2773686	20.5 - 21.0
	SKC16-8	P2730816	7.5 - 8.0		SKC20-9	P2773639	8.5 - 9.0		SKC25-21.5	P2773687	21.0 - 21.5
	SKC16-8.5	P2773620	8.0 - 8.5		SKC20-9.5	P2773640	9.0 - 9.5		SKC25-22	P2773688	21.5 - 22.0
	SKC16-9	P2773621	8.5 - 9.0		SKC20-10	P2730836	9.5 - 10.0		SKC25-22.5	P2773689	22.0 - 22.5
	SKC16-9.5	P2773622	9.0 - 9.5		SKC20-10.5	P2773641	10.0 - 10.5		SKC25-23	P2773690	22.5 - 23.0
	SKC16-10	P2730818	9.5 - 10.0		SKC20-11	P2773642	10.5 - 11.0		SKC25-23.5	P2773691	23.0 - 23.5
	SKC16-10.5	P2773623	10.0 - 10.5		SKC20-11.5	P2773643	11.0 - 11.5		SKC25-24	P2773692	23.5 - 24.0
SKC20	SKC16-11	P2773624	10.5 - 11.0		SKC20-12	P2730838	11.5 - 12.0		SKC25-24.5	P2773693	24.0 - 24.5
	SKC16-11.5	P2773625	10.0 - 11.5		SKC20-12.5	P2773644	12.0 - 12.5		SKC25-25	P2773694	24.5 - 25.0
	SKC16-12	P2730820	11.5 - 12.0		SKC20-13	P2773645	12.5 - 13.0		SKC25-25.4	P2773695	25.0 - 25.4
	SKC16-12.5	P2773626	12.0 - 12.5		SKC20-13.5	P2773646	13.0 - 13.5				
	SKC16-13	P2773627	12.5 - 13.0		SKC20-14	P2730840	13.5 - 14.0				
	SKC16-13.5	P2773628	13.0 - 13.5		SKC20-14.5	P2773647	14.0 - 14.5				
	SKC16-14	P2773822	13.5 - 14.0		SKC20-15	P2773648	14.5 - 15.0				
	SKC16-14.5	P2773629	14.0 - 14.5		SKC20-15.5	P2773649	15.0 - 15.5				
	SKC16-15	P2773630	14.5 - 15.0		SKC20-16	P2730842	15.5 - 16.0				
	SKC16-15.5	P2773631	15.0 - 15.5		SKC20-16.5	P2773650	16.0 - 16.5				
	SKC16-16	P2730824	15.5 - 16.0		SKC20-17	P2773651	16.5 - 17.0				
					SKC20-17.5	P2773652	17.0 - 17.5				
					SKC20-18	P2730844	17.5 - 18.0				
					SKC20-18.5	P2773653	18.0 - 18.5				
					SKC20-19	P2773654	18.5 - 19.0				
					SKC20-19.5	P2773655	19.0 - 19.5				
					SKC20-20	P2730846	19.5 - 20.0				

TOOLING
SYSTEM


SK SLIM
CHUCK

PART

SK NUT & SPANNER

SKN NUSS
SKN ÉCROU
SKN DADO
SKN TUERCA



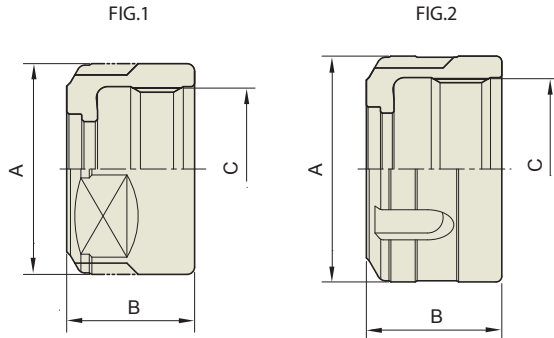

Unit : mm						
TYPE	MODEL No.	A	B	C	FIG.	WEIGHT (Kg)
SKN06	P2773581	20	15	M15.5 x 1.0	1	0.02
SKN10	P2773582	28	17	M21.5 x 1.0	1	0.04
SKN13	P2773583	33	21	M27 x 1.0	2	0.05
SKN16	P2773584	40	24	M32 x 1.5	2	0.06
SKN20	P2773585	48.5	24	M40 x 1.0	2	0.08
SKN25	P2773586	55	30	M45 x 1.5	2	0.10



MODEL No.	MODEL No.
TSK6	P2773588
TSK10	P2773589
TSK13	P2773590
TSK16	P2773591
TSK20	P2773587
TSK25	P2773592

► Design and shape could be changed without prior notice.

TOOLING
SYSTEM


SK SLIM
CHUCK

PART

SK COLLET

SK SCHLANKE FUTTER
MANDRIN TYPE SK MINCE
SK MANDRINI SOTTILI
PORTAHERRAMIENTAS SK EJE REDUCIDO



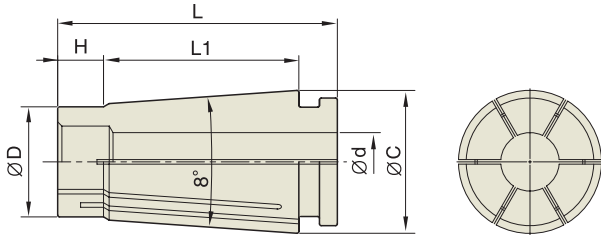

◇ T.I.R : ≤0.005mm at 3D

SKC16				SKC20				SKC25			
TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)	TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)	TYPE	MODEL No.	EDP No.	CLAMPING RANGE (d)
SKC16	SKC16-3	P2730810	2.75 - 3.0	SKC20	SKC20-4	P2730830	3.5 - 4.0	SKC25	SKC25-16.5	P2773677	16.0 - 16.5
	SKC16-3.5	P2773613	3.0 - 3.5		SKC20-4.5	P2773632	4.0 - 4.5		SKC25-17	P2773678	16.5 - 17.0
	SKC16-4	P2730812	3.5 - 4.0		SKC20-5	P2773633	4.5 - 5.0		SKC25-17.5	P2773679	17.0 - 17.5
	SKC16-4.5	P2773614	4.0 - 4.5		SKC20-5.5	P2773634	5.0 - 5.5		SKC25-18	P2773680	17.5 - 18.0
	SKC16-5	P2773615	4.5 - 5.0		SKC20-6	P2730832	5.5 - 6.0				

TOOLING
SYSTEM

Y/G

TAPPING
CHUCK

TC

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

TAP ADAPTOR (JIS)

SCHNELLWECHSEL-EINSATZ
ADAPTATEUR CHANGEMENT RAPIDE
BUSSOLA A INNESTO RAPIDO
INSERTO DE CAMBIO RAPIDO



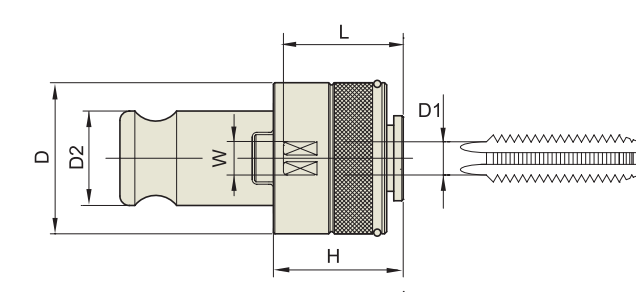

Below standard Tap Adaptor conforms to JIS.

Unit : mm

TAPER No.	MODEL No.	EDP No.	D	D1 (Ø)	D2	H	W(□)	L	WEIGHT (Kg)
TCS12	TCS12-M3	P2774651	32	4	19	25	3.2	24	0.18
	TCS12-M4	P2774652	32	5	19	25	4.	24	0.18
	TCS12-M5	P2774653	32	5.5	19	25	4.5	24	0.18
	TCS12-M6, U1/4	P2774654	32	6	19	25	4.5	24	0.18
	TCS12-M8	P2774655	32	6.2	19	25	5	25	0.18
	TCS12-M10, U3/8	P2774656	32	7	19	25	5.5	25	0.18
	TCS12-M12	P2774657	32	8.5	19	25	6.5	26	0.18
TCS24	TCS24-M6	P2774658	52	6	31	33	4.5	38	0.60
	TCS24-M8	P2774659	52	6.2	31	33	5	38	0.60
	TCS24-M10	P2774660	52	7	31	33	5.5	38	0.60
	TCS24-M12	P2774661	52	8.5	31	33	6.5	39	0.60
	TCS24-M14, U3/4	P2774662	52	10.5	31	33	8	41	0.60
	TCS24-M16	P2774663	52	12.5	31	33	10	43	0.60
	TCS24-M18, P3/8	P2774664	52	14	31	33	11	43	0.60
	TCS24-M20	P2774665	52	15	31	33	12	43.5	0.60
	TCS24-M22, U7/8	P2774666	52	17	31	33	13	46	0.60
	TCS24-M24, PF5/8	P2774667	52	19	31	33	15	46	0.60
TCS38	TCS38-M18	P2774668	72	14	48	45	11	43	1.80
	TCS38-M20	P2774669	72	15	48	45	12	43.5	1.80
	TCS38-M22	P2774670	72	17	48	45	13	45	1.80
	TCS38-M24	P2774671	72	19	48	45	15	45	1.80
	TCS38-M27, U1	P2774672	72	20	48	45	15	62	1.80
	TCS38-M30, PT3/4	P2774673	72	23	48	45	17	64	1.80
	TCS38-M33	P2774674	72	25	48	45	19	66	1.80
	TCS38-M36	P2774675	72	28	48	45	21	68	1.80
	TCS38-M38	P2774676	72	28	48	45	21	68	1.80

- Feature : Quick Change Type with Built-in Torque Safety Device.
- For Pipe Type Tap, please discuss separately.

TOOLING
SYSTEM

Y/G

TAPPING
CHUCK

TC

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET


BORING
SYSTEM

ACCESSORY
& PARTS

TAP ADAPTOR (DIN)

SCHNELLWECHSEL-EINSATZ
ADAPTATEUR CHANGEMENT RAPIDE
BUSSOLA A INNESTO RAPIDO
INSERTO DE CAMBIO RAPIDO



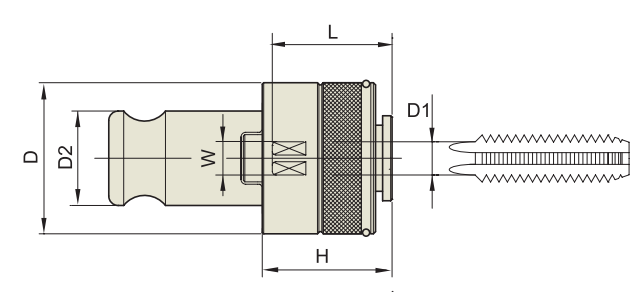

Below standard Tap Adaptor conforms to DIN.

Unit : mm

TAPER No.	MODEL No.	EDP No.	D	D1 (Ø)	D2	H	W(□)	L	DIN No.	WEIGHT (Kg)
TSC12D	TCS12D-2821	P2774601	32	2.8	19	25	2.1	24	371	0.20
	TCS12D-3527	P2774602	32	3.5	19	25	2.7	24	371	0.20
	TCS12D-4534	P2774603	32	4.5	19	25	3.4	24	371	0.20
	TCS12D-43	P2774604	32	4	19	25	3	24	371	0.20
	TCS12D-5543	P2774605	32	5.5	19	25	4.3	25	376	0.20
	TCS12D-649	P2774606	32	6	19	25	4.9	25	371	0.20
	TCS12D-755	P2774607	32	7	19	25	5.5	25	376	0.20
	TCS12D-862	P2774608	32	8	19	25	6.2	25	371	0.20
	TCS12D-97	P2774609	32	9	19	25	7	26	376	0.20
	TCS12D-108	P2774610	32	10	19	25	8	26	371	0.20
	TCS12D-119	P2774611	32	11	19	25	9	26	376	0.20
	TCS24D-649	P2774612	52	6	31	33	4.9	38	371	0.60
	TCS24D-755	P2774613	52	7	31	33	5.5	38	376	0.60
	TCS24D-862	P2774614	52	8	31	33	6.2	38	371	0.60
TCS24D	TCS24D-97	P2774615	52	9	31	33	7	38	376	0.60
	TCS24D-108	P2774616	52	10	31	33	8	39	371	0.60
	TCS24D-119	P2774617	52	11	31	33	9	41	376	0.60
	TCS24D-129	P2774618	52	12	31	33	9	43	376	0.60
	TCS24D-1411	P2774619	52	14	31	33	11	43	376	0.60
	TCS24D-1612	P2774620	52	16	31	33	12	46	376	0.60
	TCS24D-18145	P2774621	52	18	31	33	14.5	46	376	0.60
	TCS38D-119	P2774622	72	11	48	45	9	43	376	1.80
	TCS38D-129	P2774623	72	12	48	45	9	43	376	1.80
	TCS38D-1411	P2774624	72	14	48	45	11	45	376	1.80
	TCS38D-1612	P2774625	72	16	48	45	12	45	376	1.80
	TCS38D-18145	P2774626	72	18	48	45	14.5	62	376	1.80
	TCS38D-2016	P2774627	72	20	48	45	16	64	376	1.80
	TCS38D-2218	P2774628	72	22	48	45	18	66	376	1.80
	TCS38D-2520	P2774629	72	25	48	45	20	68	376	1.80
	TCS38D-2822	P2774630	72	28	48	45	22	68	376	1.80

- Feature : Quick Change Type with Built-in Torque Safety Device.
- For Pipe Type Tap, please discuss separately.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM


ACCESSORY & PARTS



TC

TOOL CLAMP

MONTAGEVORRICHTUNGEN
DISPOSITIF DE MONTAGE
ATTREZZO PER IL MONTAGGIO DI MANDRINI
SOPORTE PARA MONTAJE



• Flange Clamping Design

Unit : mm


TAPER No.	MODEL No.	EDP No.	A	B	C	H	WEIGHT (Kg)
BT30	TCP30	P2775067	125	65	108	135	3.00
BT40	TCP40	P2775068	160	80	138	180	7.60
BT50	TCP50	P2775069	180	90	165	205	8.60
SK30	TSK30	P2775070	125	65	108	135	3.00
SK40	TSK40	P2775071	160	80	138	180	7.60
SK50	TSK50	P2775072	180	90	165	205	8.60
HSK32/40/50	THSK32/40/50	P2775073/P2775074/P2775075	125	65	108	135	-
HSK63	THSK63	P2775076	160	80	138	180	-
HSK100	THSK100	P2775077	180	90	165	205	-

► Tool clamp for CAT taper available.

HP


HEIGHT PRESETTER

• MAGNETIC HEIGHT PRESETTER



• Both vertical and horizontal type usable
• Slim design

• HEIGHT PRESETTER



• Exclusively for vertical

Unit : mm

MODEL No.	MODEL No.	D	H	d	DIAL
MHP-100 (magnetic)	P2591001	76	100	33	0.01
HP-100	P2775901	68	100 / - 0.01	33	0.01

D322

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL HOLDER SET

BORING SYSTEM


ACCESSORY & PARTS



CT

COOLANT TUBE (For HSK TAPER)

ANZUGBOLZEN
BOULONS DE SERRAGE
TIRANTI PER MANDRINI UNIVERSALI
TIRANTES PARA PORTAHERRAMIENTAS

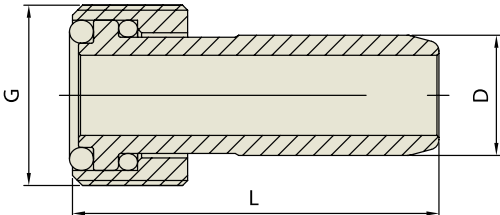


Unit : mm

TAPER No.	EDP No.	D	G
HSK32	P2775078	6	M10
HSK40	P2775079	8	M12
HSK50	P2775080	10	M16
HSK63	P2775081	12	M18
HSK80	P2775106	14	M20
HSK100	P2775082	16	M24

CTS

COOLANT TUBE SPANNER (For HSK TAPER)

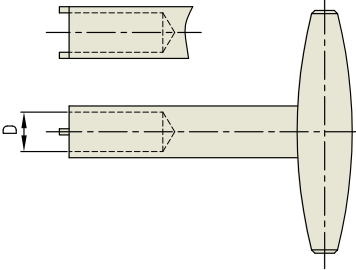

Unit : mm

TAPER No.	EDP No.	D
HSK32	P2775103	6
HSK40	P2775104	8
HSK50	P2775089	10
HSK63	P2775087	12
HSK80	P2775105	14
HSK100	P2775090	16

► Design and shape could be changed without prior notice.

D323

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

 YG-1 CO., LTD.

TOOLING
SYSTEM

SK
(DIN 69871)

CBT
(BT DUAL
CONTACT)

BT
(JIS B6339/
MAS 403)

HSK
(DIN 69893/
ISO 12164)

STRAIGHT

ISO, NT,
MTA/MTB,
GOST

TOOL
HOLDER
SET

BORING
SYSTEM

ACCESSORY
& PARTS



AB

ADJUST BOLT (For HSK MQL1)



FIG 1





FIG 2

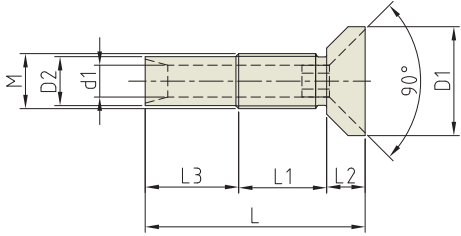

Unit : mm

DESCRIPTIONS	HOLDER I.D	EDP No.	L	L1	L2	L3	d1	D1	D2	M	FIG.
SHORT	6	P2775112	17.0	15.5	1.5	-	3.0	5.8	-	M5x0.8	1
	8	P2775113	18.0	15.5	2.5	-	3.5	7.8	-	M6x1.0	1
	10	P2775114	18.0	15.0	3.0	-	4.7	9.8	-	M8x1.0	1
	12	P2775115	18.0	15.0	3.0	-	5.8	11.8	-	M10x1.0	1
	14	P2775116	19.5	15.5	4.0	-	5.8	13.8	-	M10x1.0	1
	16	P2775117	22.0	17.0	5.0	-	5.8	15.8	-	M10x1.0	1
	18	P2775118	22.0	16.0	6.0	-	5.8	17.8	-	M10x1.0	1
	20	P2775119	23.5	16.5	7.0	-	5.8	19.8	-	M10x1.0	1
	25	P2775120	27.5	18.0	9.5	-	5.8	24.8	-	M10x1.0	1
	32	P2775121	30.5	17.5	13.0	-	5.8	31.8	-	M10x1.0	1
LONG	6	P2775122	34.0	32.5	1.5	15.0	3.0	5.8	4.1	M5x0.8	2
	8	P2775123	34.0	31.5	2.5	15.0	3.5	7.8	4.9	M6x1.0	2
	10	P2775124	35.0	32.0	3.0	15.0	4.7	9.8	6.9	M8x1.0	2
	12	P2775125	35.0	32.0	3.0	15.0	5.8	11.8	8.9	M10x1.0	2
	14	P2775126	35.5	31.5	4.0	15.0	5.8	13.8	8.9	M10x1.0	2
	16	P2775127	37.0	32.0	5.0	15.0	5.8	15.8	8.9	M10x1.0	2
	18	P2775128	37.5	31.5	6.0	15.0	5.8	17.8	8.9	M10x1.0	2
	20	P2775129	40.0	33.0	7.0	15.0	5.8	19.8	8.9	M10x1.0	2
	25	P2775130	44.0	34.5	9.5	15.0	5.8	24.8	8.9	M10x1.0	2
	32	P2775131	45.0	32.0	13.0	14.0	5.8	31.8	8.9	M10x1.0	2

YG-1 TOOLING SYSTEM

TECHNICAL
INFORMATION

MODEL NUMBERING SYSTEM & SURFACE FINISH

HYDRAULIC CHUCK

SHRINK FIT HOLDER

ER COLLET CHUCK

POWER MILLING CHUCK

TAPPING ER CHUCK & TAPPING CHUCK

NC DRILL CHUCK

BALANCING


SHANK DATA

- SK (DIN 69871)
- BT (JIS B6339/MAS 403)
- HSK (DIN 69893/ISO 12164)
- ASME B5.50 (CAT)
- DIN 228 (MTA/MTB)

D324 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions YG-1 CO., LTD. YG-1 CO., LTD. phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions D325

MODEL NUMBERING SYSTEM & SURFACE FINISH

▶ Model Numbering System

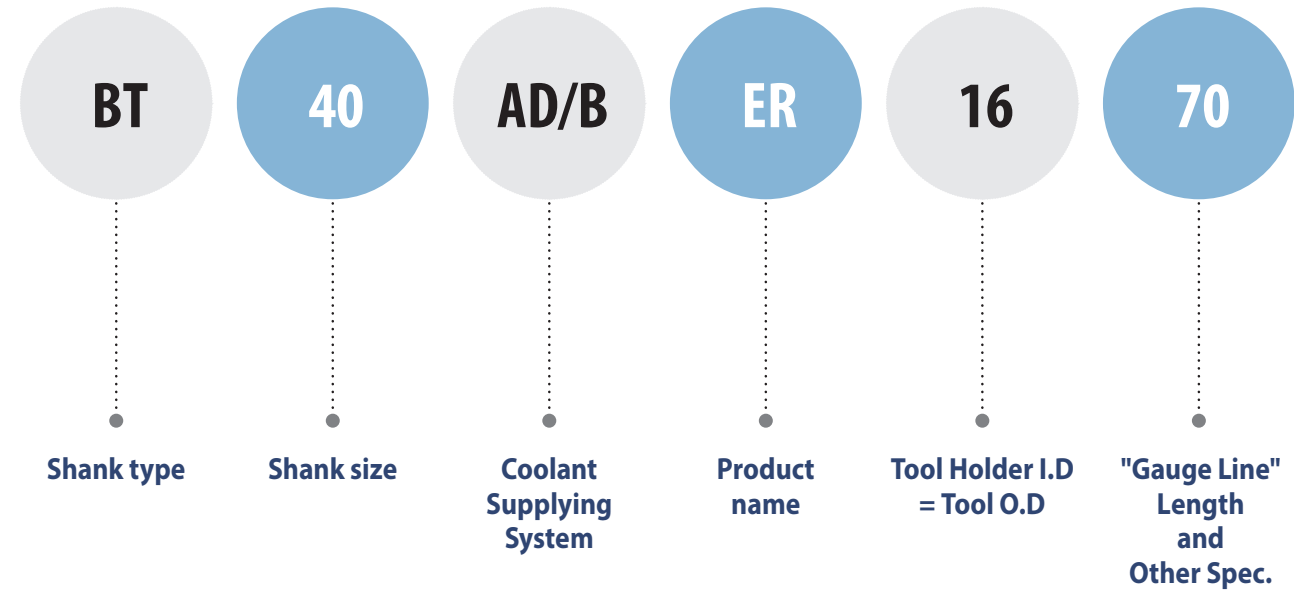


▶ Surface Finish




HYDRAULIC CHUCK

▶ High precision T.I.R : $\leq 0.003\text{mm}$ (Without Reduction Sleeve)

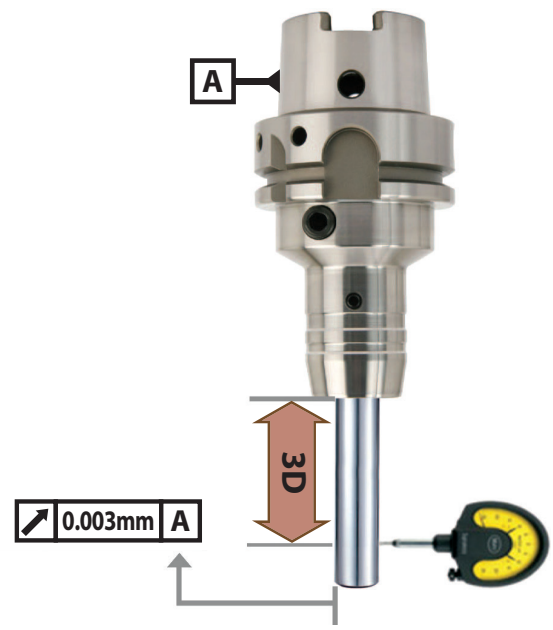


- Less than 0.003mm T.I.R
- ⇒ Suitable for High-Speed precision machining

▶ Flexible use of cutting tools by using of reduction sleeves

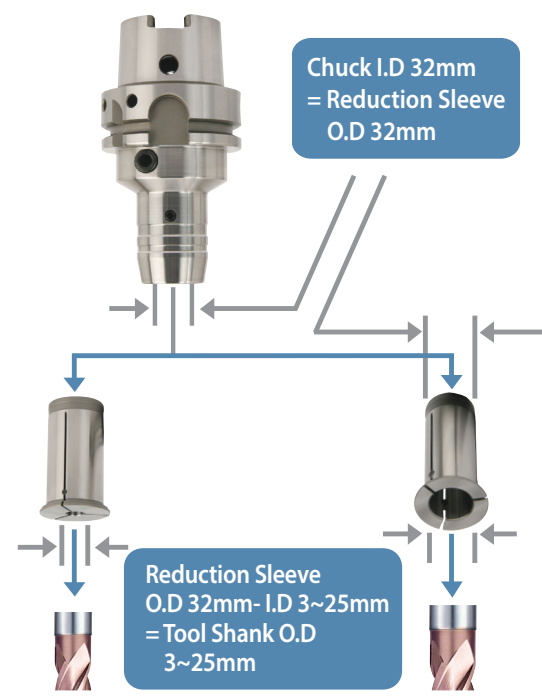

▶ Easy Tool Change

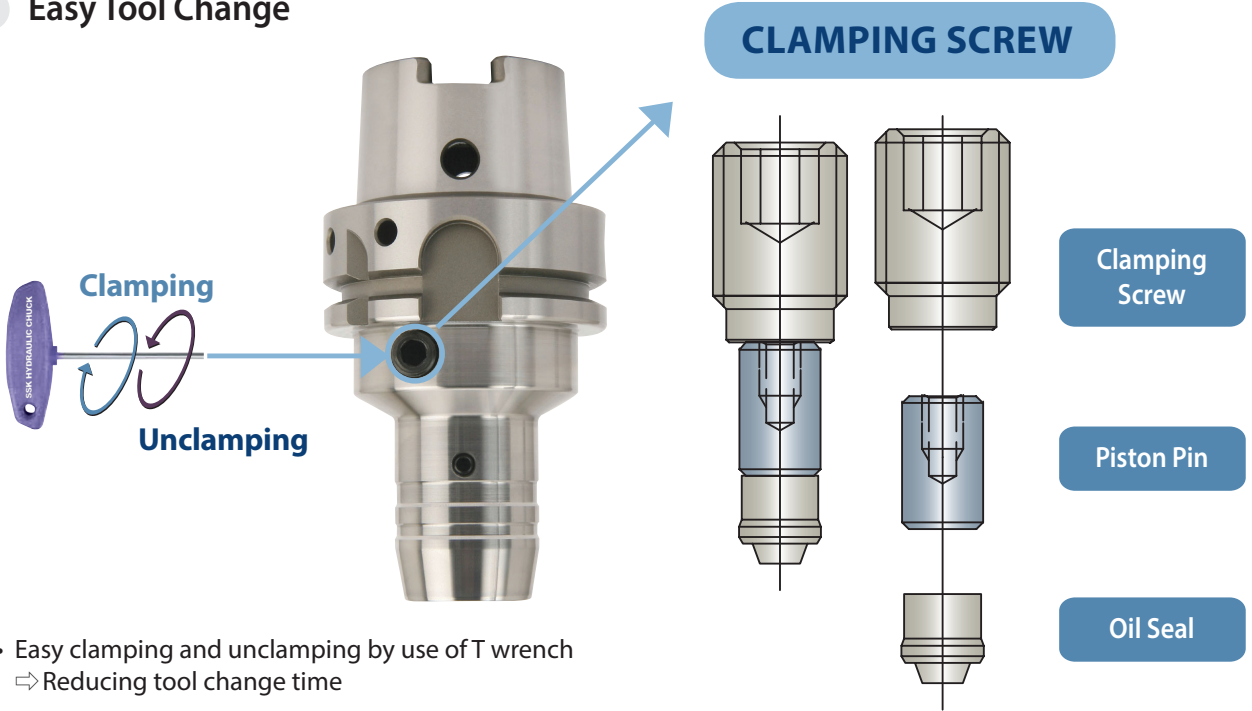

- Easy clamping and unclamping by use of T wrench
- ⇒ Reducing tool change time
- Supplied with clamping T-wrench.

HYDRAULIC CHUCK

► Strong Torque Power


Hydraulic Chuck I.D (mm)	Tool Shank O.D (mm)	Applicable RPM	Minimum Clamping Depth (mm)		Min. Torque Power (Nm)	
			Standard	Power E Hydro	Standard	Power E Hydro
6	6	40,000	27		16	
8	8	40,000	27		23	
10	10	40,000	32		45	
12	12	40,000	37	41	90	110
14	14	40,000	37		110	
16	16	40,000	42		185	
18	18	40,000	42		240	
20	20	40,000	42	48	330	520
25	25	25,000	48		400	
32	32	25,000	55	57	650	900

- Tool Holder I.D Tolerance : H6
- Operating Temperature : 20~25℃
- Maximum pressure of coolant oil : 80bar



► Test of Torque Power and Hydraulic Oil Leakage


- Test Model : BT40 AD/B-HC 20-90
- No oil leakage for long period ⇒ Maintaining stable torque power

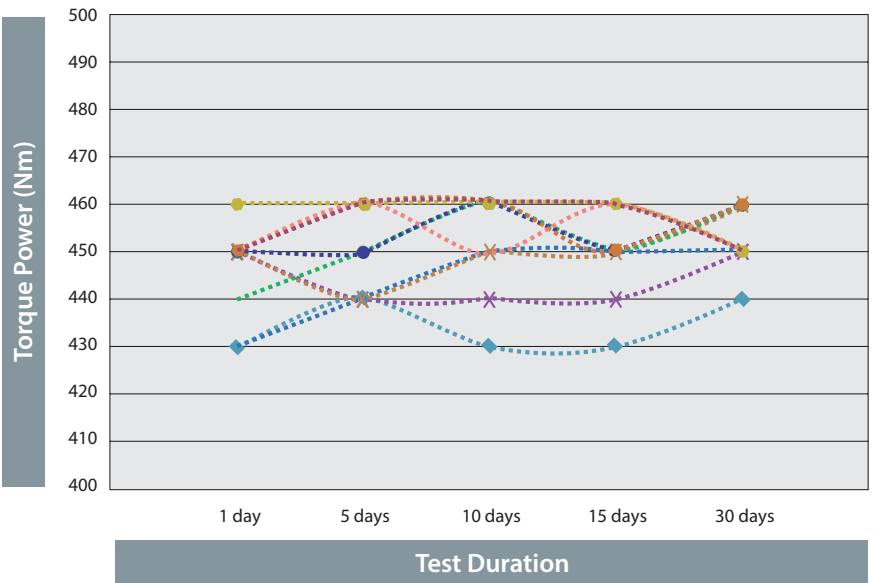


HYDRAULIC CHUCK

► Radial Tool Length Pre-setting Type

- Easy to adjust pre-setting length of cutting tool (Saving time to pre-set cutting tool to one fifth compared with conventional Hydraulic Chuck)
- Precise adjustment of cutting tool length
- Designed to separate tool length adjustment screw from clamping screw

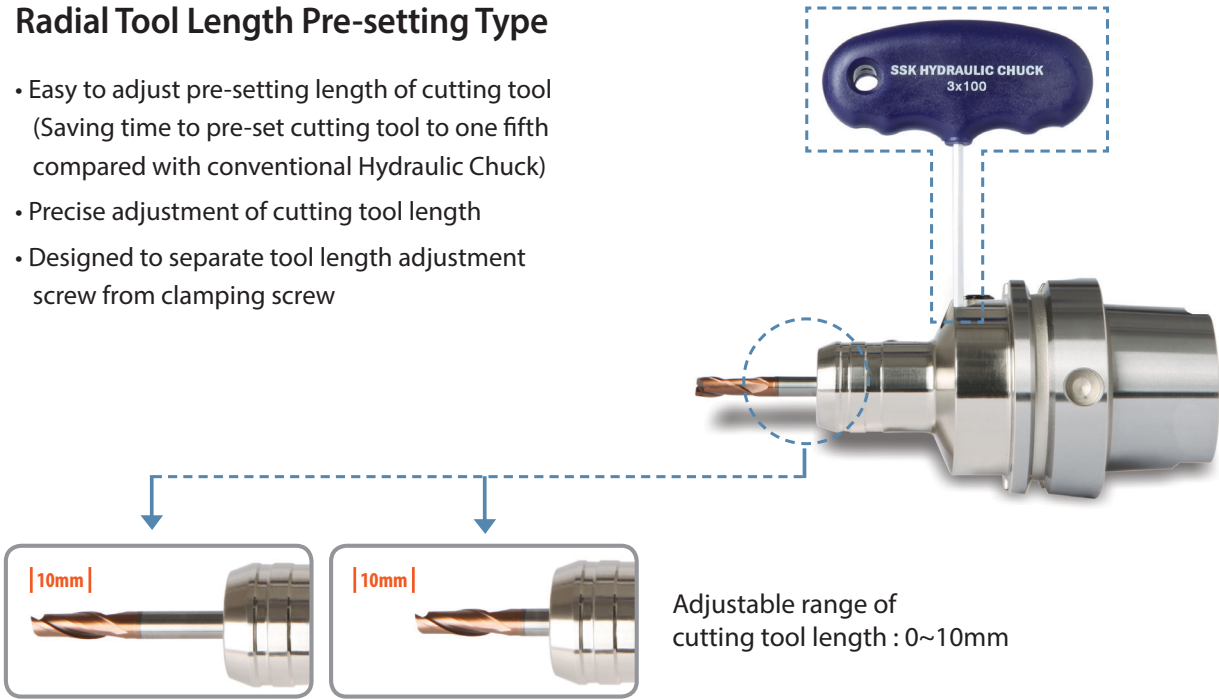


► Application

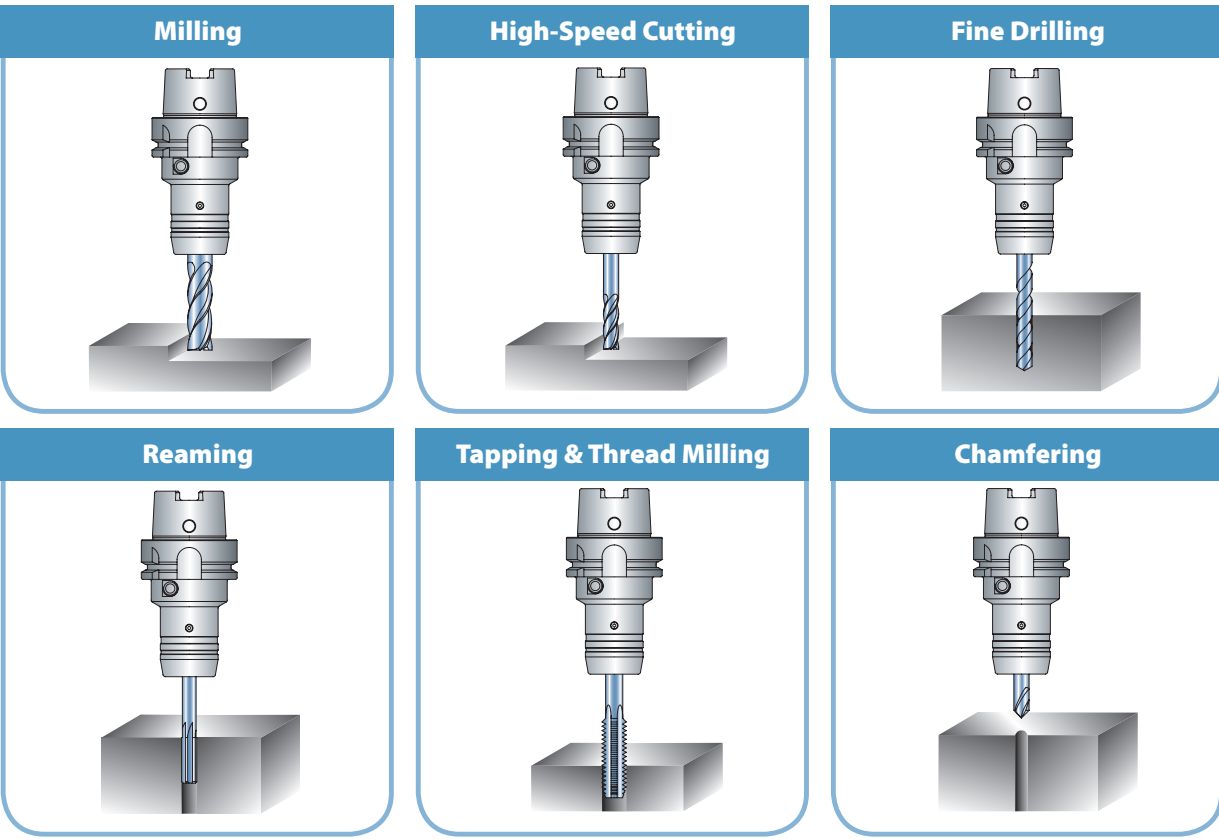

SHRINK FIT HOLDER


- ▶ High Precision I.D
Run-Out : $\leq 0.003\text{mm}$

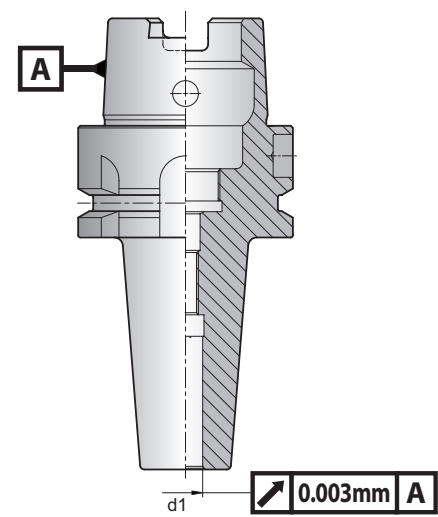

- Less than 0.003mm of Tool Holder accuracy at I.D

- ▶ Strong and Consistent Torque Power


COLLET CHUCK SHRINK FIT HOLDER

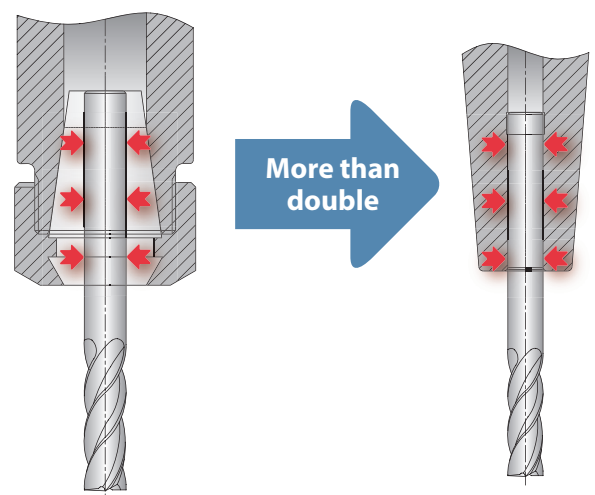

- Achieving strong torque power by integration of chuck and tool


- ▶ Deep hole Machining

COLLET CHUCK

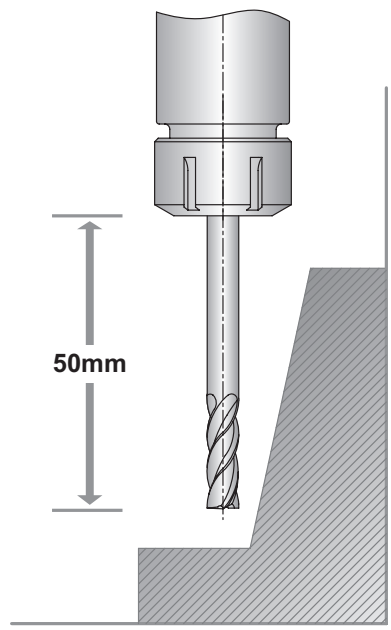

SHRINK FIT HOLDER

More favorable in deep hole machining

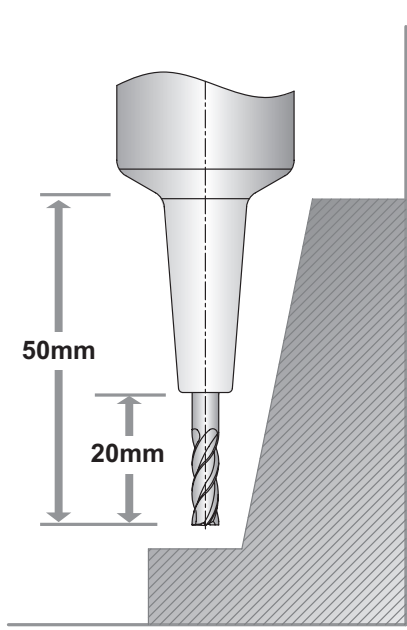

- Suitable for High-Speed precision deep hole machining


SHRINK FIT HOLDER

- ▶ Shank Type of Cutting Tool

STRAIGHT SHANK



ONE WELDON FLAT SHAFT TYPE




- One Weldon flat shaft type tool is usable, but there is a possibility that the I.D of Shrink Fit Holder may be deformed.

- ▶ Material of Cutting Tool

CARBIDE TOOL
YES

HSS TOOL
NO

- ▶ Application

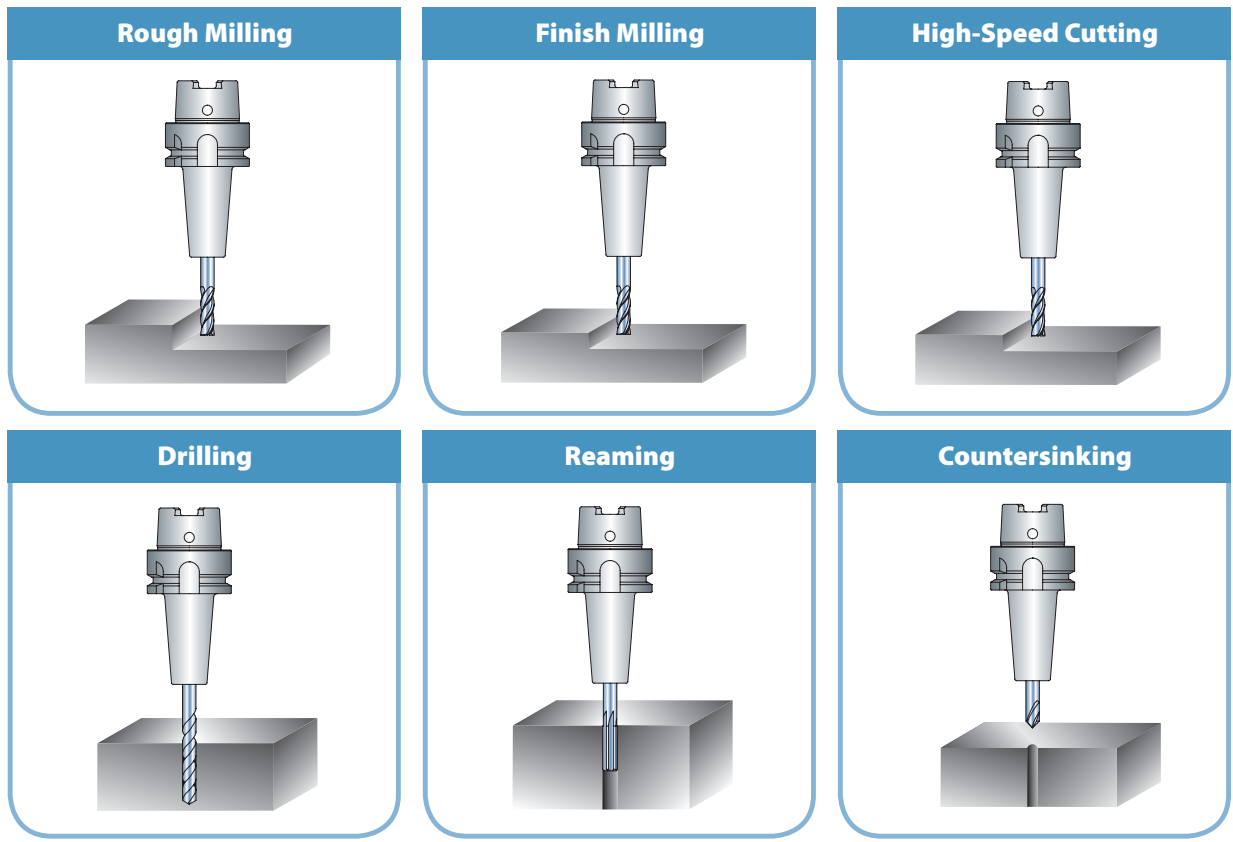


ER COLLET CHUCK

► Feature


- Powerful chucking, high precision and easy operation
- Precise machining is stably maintained without chattering in High-Speed rotation.
- Due to nut designed with small bore, interference with work piece can be minimized and it enables speedy operation.
- Various nuts can be selected and used according to usage.
- Unlike single taper, double taper has long chucking part providing excellent torque power.

► Strong Torque Power

- Longer clamping part of double taper collet provides stronger torque power.
- Stronger torque power can be achieved if ball bearing nut is used.

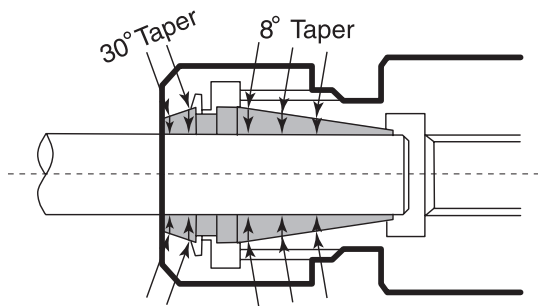

► Standard Precision

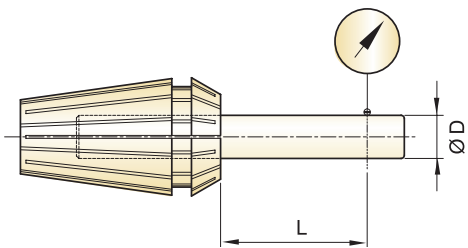


Unit : mm		
D	L	Max. T.I.R (STD.)
Ø1 ~ Ø1.6	6	0.015
Ø1.6 ~ Ø3	10	0.015
Ø3 ~ Ø6	16	0.015
Ø6 ~ Ø10	25	0.015
Ø10 ~ Ø18	40	0.020
Ø18 ~ Ø26	50	0.020
Ø26 ~ Ø34	60	0.020

- By using high precision collet, excellent T.I.R can be achievable
- With fine cutting of 16 sections, it has excellent contractile force, which makes higher precision can be achieved

ER COLLET CHUCK

► Easy Assembling & Disassembling

- For assembling or disassembling of collet, first gently insert groove part of collet into eccentric portion inside nut, and fasten it to same direction as screw or loosen it reversely.
- Notice : In case of Ø12.2mm tool, don't use Ø12~11mm collet.
But use collet with Ø12.5~11.5mm. (In case of general cutting process, Ø13~12mm collet is usable)

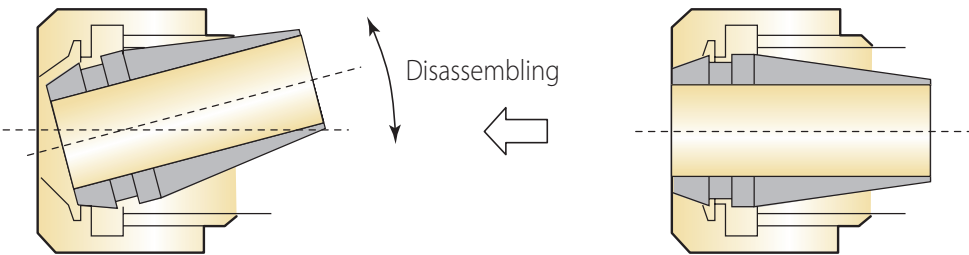

► Recommended Tightening Torque for the Collet Nut


Collet Chuck Size	Clamping Range (mm)	Max. Tightening Torque (Nm)	Collet Chuck Size	Clamping Range (mm)	Max. Tightening Torque (Nm)
ER11	1.0 ~ 2.9	8	ER25	1.0 ~ 3.5	24
	3.0 ~ 7.0	24		4.0 ~ 4.5	56
ER16	1.0	8		5.0 ~ 7.5	80
	1.5 ~ 3.5	20	ER32	8.0 ~ 17.0	104
	4.0 ~ 4.5	40		2.0 ~ 2.5	24
	5.0 ~ 10.0	56	ER40	3.0 ~ 22.0	136
ER20	1.0	16		3.0 ~ 26.0	176
	1.5 ~ 6.5	32	ER50	6.0 ~ 36.0	240
	7.0 ~ 13.0	80			

► Recommended Tightening Torque for the Collet Nut (Slim Type)


Collet Chuck Size	Clamping Range (mm)	Max. Tightening Torque (Nm)	Collet Chuck Size	Clamping Range (mm)	Max. Tightening Torque (Nm)
ER8M	0.2 ~ 5.0	6	ER20M	1.0	16
ER11M	0.2 ~ 2.9	8		1.5 ~ 13.0	28
	3.0 ~ 7.0	16	ER25M	1.0 ~ 3.5	18
ER16M	0.2 ~ 1.0	8		4.0 ~ 17.0	24
	1.5 ~ 3.5	20			
	4.0 ~ 10.0	24			

POWER MILLING CHUCK


- Rigidity is strengthened through slot made at inside milling chuck, which prevents deformation of milling chuck. Smooth cutting is achieved by maximizing end mill clamping power.
- Enough thickness of clamping part prevents chattering and ensures durability.



- High precision can be achieved through accurate roundness of clamping part, deburred surface and rigidity. (deviation of concentricity : below 2, roughness : below RZ B1.0~1.5)
- Maintaining T.I.R not exceeding 0.01mm at 3D from nose part.

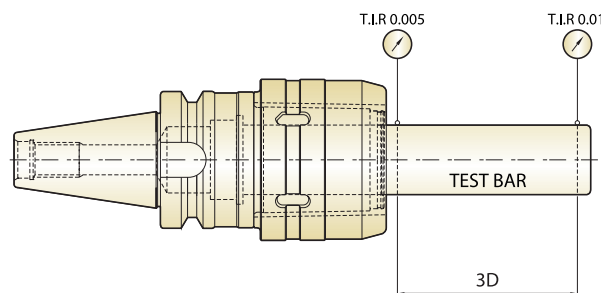

- 160% more of bearings are used in needle roller than other make's chucks, which provides strong clamping power and high durability by dispersing surface pressure even in case strong load is applied.



▶ In order to improve durability, YG-1 Milling Chuck is passed through following processes.


- "Normalizing" treatment for unifying material composition and removal internal stress.
- Ultralow temperature (-90°C) treatment called "Sub-Zero treatment" after carburizing heat treatment for prior removal of any deformation of milling chuck after use for long periods of time.

POWER MILLING CHUCK

▶ Feature


High-Speed POWER MILLING CHUCK

- Achieving optimum cutting for High-Speed heavy duty cutting and finishing with strong torque power
- Perfect clamping from 3mm depth of I.D entrance
- Achieving stability when exchanging and setting tools by stable fastening and unfastening torque

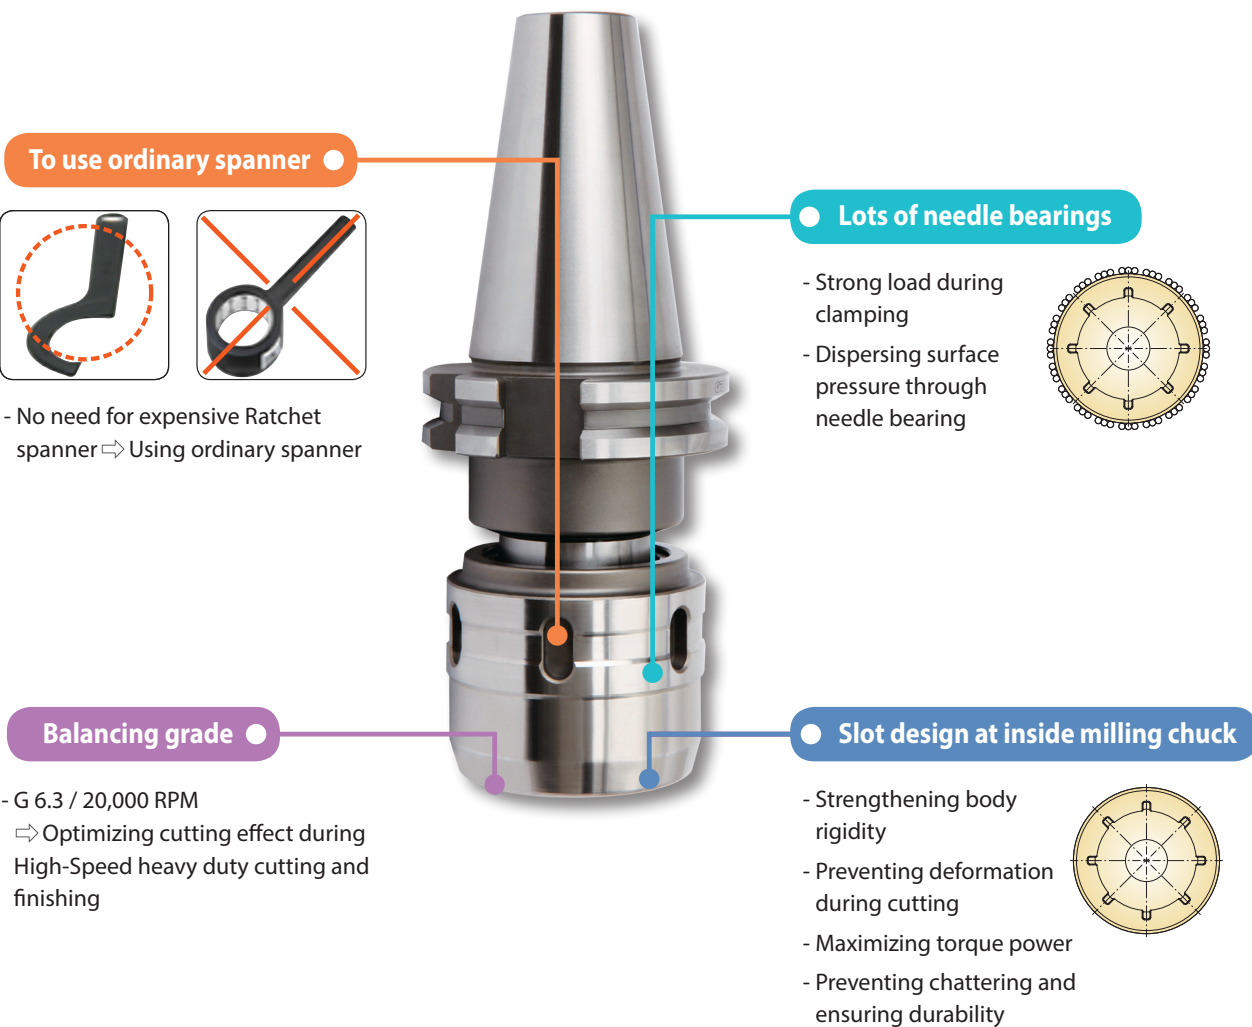

▶ Strong Torque Power

Milling chuck (I.D)	Standard	Tolerance (Taper shank)	Run-Out	Clamping torque
C20	AT3	ISO 30 (0~+0.002) ISO 40 (0~+0.003) ISO 50 (0~+0.004)	0.01mm at 3D	980Nm
C25				1,760Nm
C32				3,430Nm
C42				4,900Nm

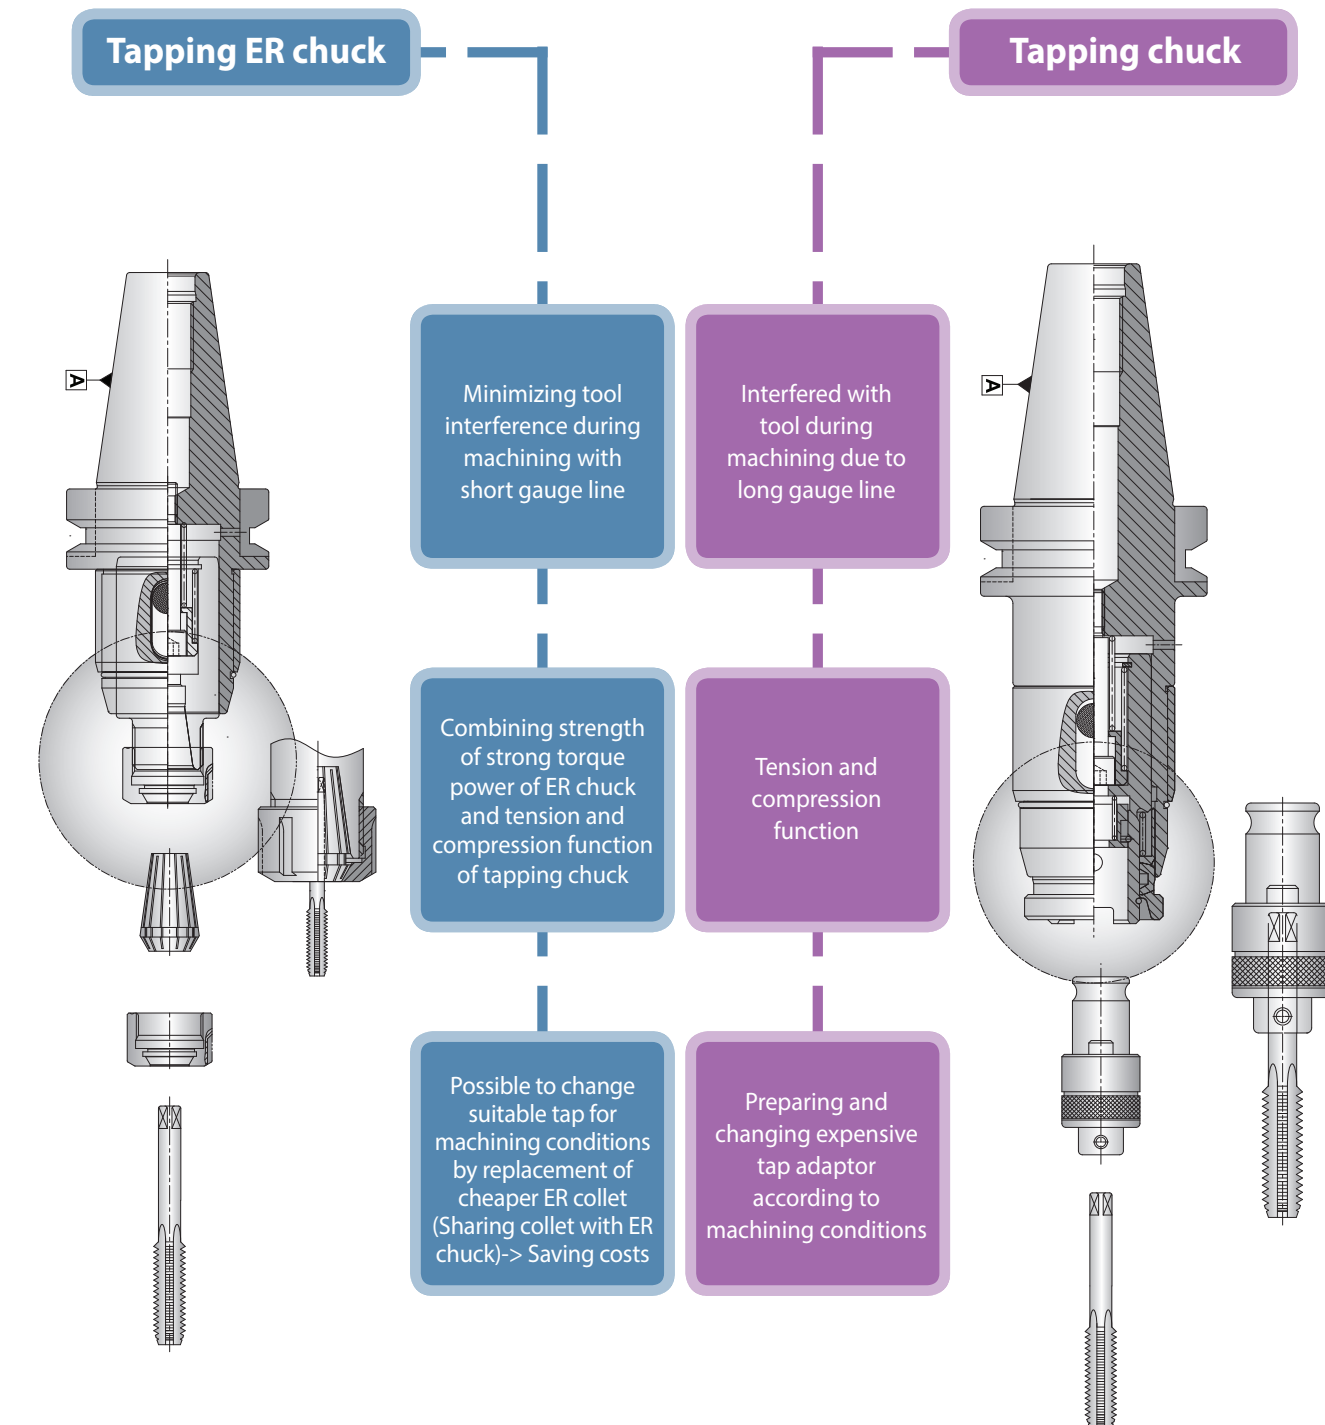


Feature

YG-1 Drill Chuck is completely tightened with solid bolt, and there is no danger of falling during rotating or cutting.

High Precision

• Drill chuck with excellent high precision (T.I.R 0.05mm) and shank are integrated, which guarantees excellent T.I.R

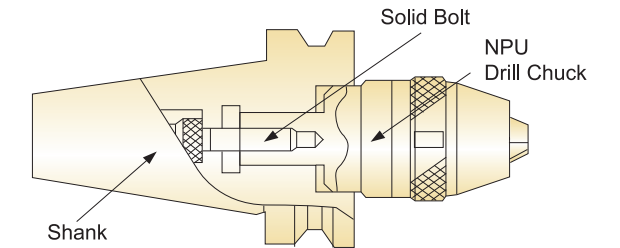

Strong Chucking Power

Drill may be damaged due to reverse thrust during perforation, but with YG-1 Drill Chuck strongly tightened with wrench, there is no possibility of damage to drill.

Safety

YG-1 NC Drill Chuck with strong rigidity contributes to factory automation by unmanned operation by preventing accident from occurring during operation.

- Falling of drill occurring by sudden stopping
- Falling of drill occurring by rapid rotation
- Damage to drill caused by reverse thrust during perforation process

Clamping Method



▲ Keyless Type




▲ Hex. Key Type

BALANCING

► Definition of Balancing and Unbalancing

If the rotor(tool holder) is rotated around the axis, centrifugal forces generate in all parts. If these centrifugal forces are distributed symmetrically against the rotation axis, the centrifugal forces generating in the opposite direction are offset by one another, resulting in no forces to the rotation axis eventually. Therefore bearings are not vibrated. In this case tool holder is in the balanced state. On the contrary, if centrifugal forces are distributed asymmetrically against the rotation axis, or if the force of one part is greater than that of the opposite part, the forces equivalent to differences are added to the rotation axis, causing the rotor(tool holder) to vibrate. The imbalance of distribution of rotor mass is called "Unbalance". In other words, "Unbalance" is mass existing unevenly in the rotor(tool holder).

► Balancing Grade Quality According to DIN ISO 1940

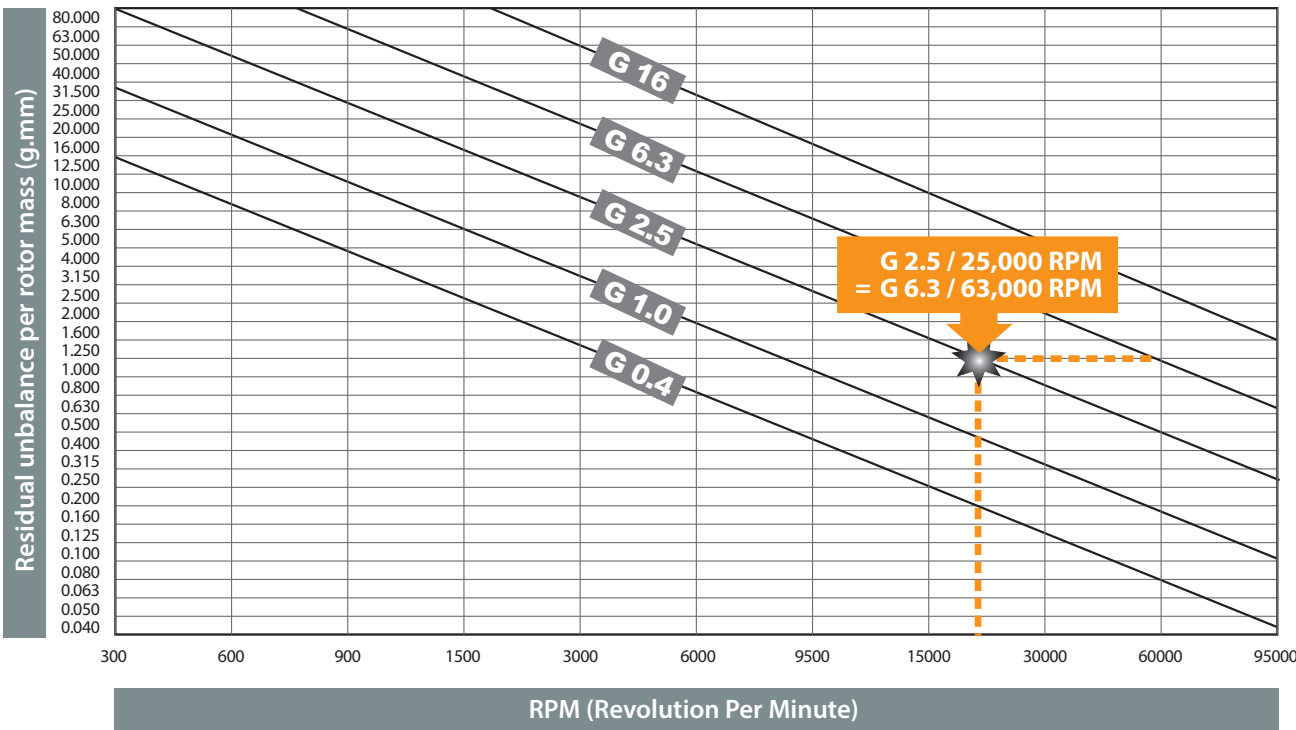

Calculation of G

$$\frac{G \times m}{\text{RPM}} \times 9549 = U$$

G : Balancing grade or circumference speed
m : Rotor(Holder) weight ⇒ Unit : kg
9549 : Conversion constant
U : Degree of unbalance (Permissible unbalance) ⇒ Unit : g.mm
RPM : Revolutions Per Minute

► Merits of Balanced Machining

Recently, rotating machines are more sophisticated and operated at High-Speed with the technical advance. Also, they require more efficiency and more stable functions which are stricter conditions than ever before. In High-Speed machining, one of the largest factors which degrade performance of machines is chattering. It causes workers to suffer displeasure, noise, and fatigue which are main problems affecting productivity. Balancing of the rotor(tool holder) is the essential and effective factor in order to prevent vibration of the machine. It is widely recognized as the indispensable process in manufacturing rotation machinery. YG-1 manufactures tool holders with various balancing grades meeting the needs of users.

► Balancing Grade Standard




► Balancing Specification for Balancing Design Products

PRODUCT	SHANK	GRADE	RPM
HYDRAULIC CHUCK	BT/CBT 30/40/50 SK 30/40/50 HSK 32/40/50/63/80/100	G 2.5	25,000
SHRINK FIT HOLDER	BT/CBT 30/40/50 SK 30/40/50 HSK 25/32/40/50/63/80/100 ISO 25	G 2.5	25,000
OTHER CHUCKS & TOOL HOLDERS	BT/CBT 30/40/50 SK 30/40/50 HSK 25/32/40/50/63/80/100 ISO 20/25	G 6.3 G 2.5	15,000 25,000

※ Higher Balancing Grade Product Could Be Supplied Upon Customer's Request.

TECHNICAL INFORMATION


SHANK DATA - DIN 69871 (ISO 7388-1)

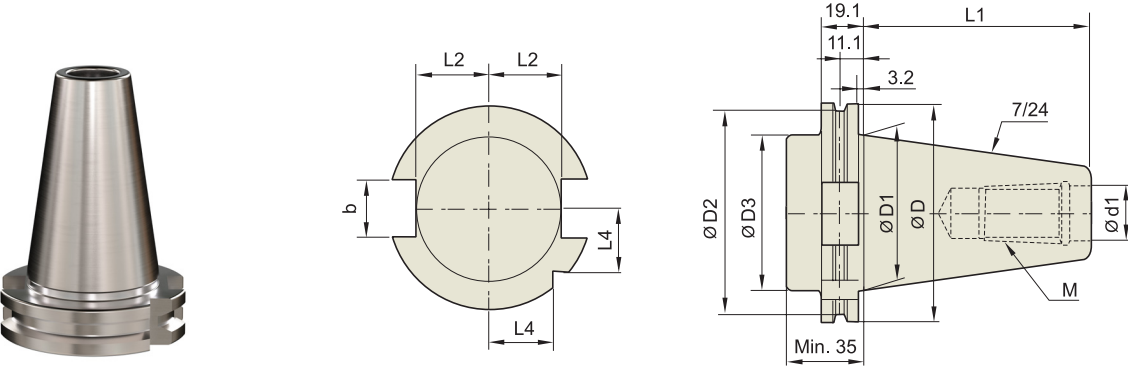

Unit : mm

TAPER No.	ØD	ØD1	ØD2	ØD3	Ød1	L1	L2	L3	L4	b	M
SK30	50	31.75	44.3	45	13	47.8	16.4	19	15	16.1	M12×1.75
SK40	63.55	44.45	56.25	50	17	68.4	22.8	25	18.5	16.1	M16×2.0
SK50	97.5	69.85	91.25	80	25	101.75	35.5	37.7	30	25.7	M24×3.0


SHANK DATA - DIN 69893/ISO 12164

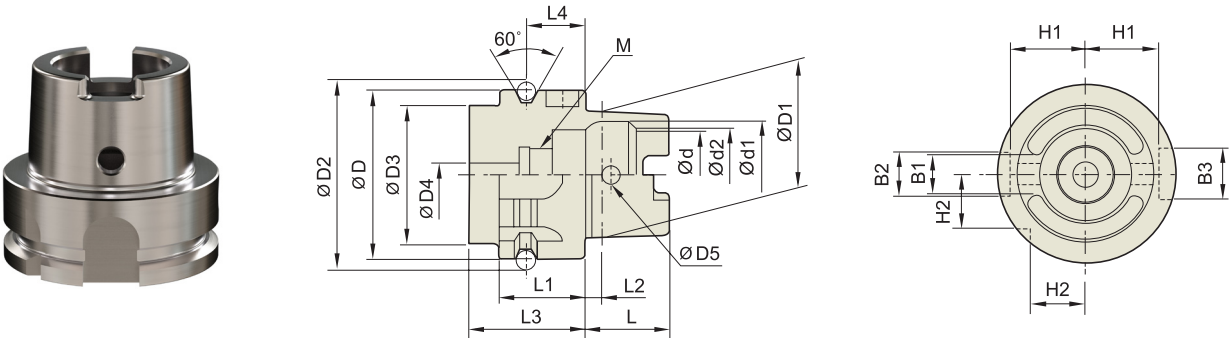

Unit : mm

TAPER No.	ØD	ØD1	ØD2	ØD3	ØD4	ØD5	L	L1	L2	L3	L4
HSK32A	32	24	37.00	26	4.2	4.0	16	20	3.2	35	16
HSK40A	40	30	45.00	34	5.0	4.6	20	20	4.0	35	16
HSK50A	50	38	59.30	42	6.8	6.0	25	26	5.0	42	18
HSK63A	63	48	72.30	53	8.4	7.5	32	26	6.3	42	18
HSK80A	80	60	88.8	68	10.2	8.5	40	26	8	42	18
HSK100A	100	75	109.75	88	12.0	12.0	50	29	10.0	45	20

SHANK DATA - JIS B6339/MAS 403 (ISO 7388-2)

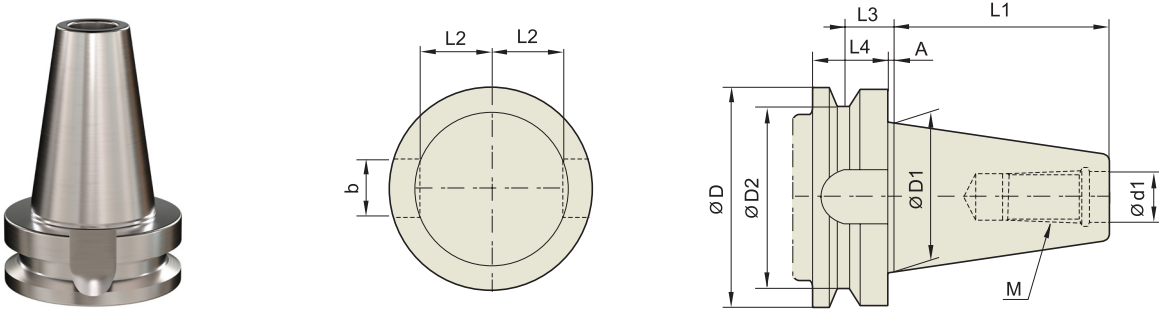


Unit : mm

TAPER No.	ØD	ØD1	ØD2	Ød1	L1	L2	L3	L4	A	b	M
BT30	46	31.75	38	12.5	48.4	16.3	13.6	20	2	16.1	M12×1.75
BT40	63	44.45	53	17	65.4	22.6	16.6	25	2	16.1	M16×2
BT50	100	69.85	85	25	101.8	35.4	23.2	35	3	25.7	M24×3
BT60	155	107.95	135	31	161.8	60.1	28.2	45	3	25.7	M30×3.5

Unit : mm

TAPER No.	Ød	Ød1	Ød2	B1	B2	B3	H1	H2	L4
HSK32A	17	20.5	19	7.05	7	9	13.0	9.5	M10×1.0
HSK40A	21	25.5	23	8.05	9	11	17.0	12.0	M12×1.0
HSK50A	26	32.0	29	10.54	12	14	21.0	15.5	M16×1.0
HSK63A	34	40.0	37	12.54	16	18	26.5	20.0	M18×1.0
HSK80A	42	50	46	16.04	18	20	34	25	M20×1.5
HSK100A	53	63.0	58	20.02	20	22	44.0	31.5	M24×1.5

ASME B5.50

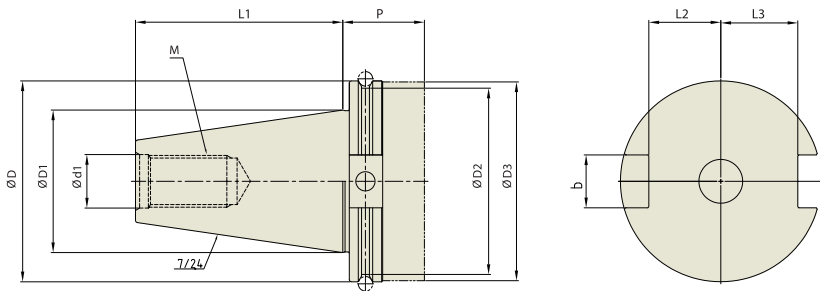


ASME B5.50-CAT (OLD : 1978)

Unit : mm											
TAPER No.	ØD	ØD1	ØD2	ØD3	Ød1	L1	L2	L3	b	P	M
CAT30	50	31.75	44.3	31.75	13	47.625	16.25	18.67	16.1	-	UNC1/2-13
CAT40	63.55	44.45	56.25	44.45	17	68.25	22.6	25	16.1	-	UNC5/8-11
CAT50	97.5	69.85	91.25	70.1	25	101.6	35.3	37.7	25.7	-	UNC1-18
CAT60	155	107.95	132.56	108	32	161.93	54	59.3	25.7	-	UNC1 1/4-7

ASME B5.50-CAT (NEW : Revision 2009)


Unit : mm											
TAPER No.	ØD	ØD1	ØD2	ØD3	Ød1	L1	L2	L3	b	P	M
CAT30	46.02	31.75	38.89	46.02	13	47.625	16.25	18.67	16.1	-	UNC1/2-13
CAT40	63.5	44.45	56.36	63.5	17	68.25	22.6	25	16.1	-	UNC5/8-11
CAT50	98.43	69.85	91.29	98.43	25	101.6	35.3	37.7	25.7	-	UNC1-18
CAT60	139.7	107.95	132.56	139.7	32	161.93	54	59.3	25.7	-	UNC1 1/4-7

DIN 228

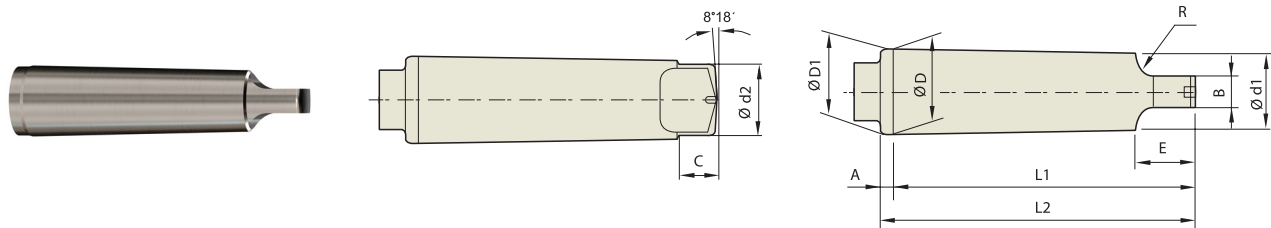

DIN 228 (MORSE TAPER) TANG TYPE (MTA)

Unit : mm													
TAPER No.	TAPER RATIO (Rad)	TAPER ANGLE (α)	ØD	A	ØD1	Ød1	L1	L2	Ød2	B	C	E	R
MT0	1/19.212	1°29'27"	9.045	3	9.045	6.104	56.5	59.5	6.0	3.9	6.5	10.5	4
MT1	1/20.047	1°25'43"	12.065	3.5	12.065	8.972	62.0	65.5	8.7	5.2	8.5	13.5	5
MT2	1/20.020	1°25'50"	17.780	5	17.780	14.034	75.0	80.0	13.5	6.3	10	16	6
MT3	1/19.922	1°26'16"	23.825	5	23.825	19.107	94.0	99.0	18.5	7.9	13	20	7
MT4	1/19.254	1°29'15"	31.267	6.5	31.267	25.164	117.5	124.0	24.5	11.9	16	24	8
MT5	1/19.002	1°30'26"	44.399	6.5	44.399	36.531	149.5	156.0	35.7	15.9	19	29	10
MT6	1/19.180	1°29'36"	63.348	8	63.348	52.399	210.0	218.0	51.0	19.0	27	40	13
MT7	1/19.231	1°29'22"	83.058	10	83.058	68.186	286.0	296.0	66.8	28.6	35	54	19

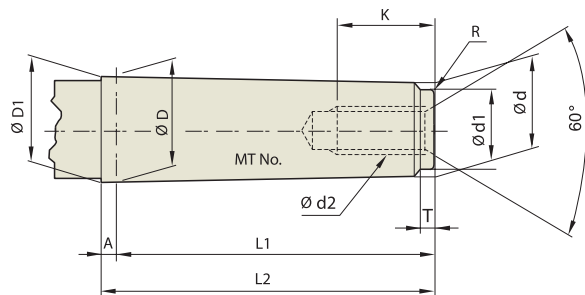


DIN 228 (MORSE TAPER) SCREW TYPE (MTB)

Unit : mm													
TAPER No.	TAPER RATIO (Rad)	TAPER ANGLE (α)	ØD	A	ØD1	d	L1	L2	Ød1	d2	K	T	R
MT0	1/19.212	1°29'27"	9.045	3	9.201	6.442	50	53	6.4	-	-	4	0.2
MT1	1/20.047	1°25'43"	12.065	3.5	12.230	9.396	53.5	57	9.4	M6	16	5	0.2
MT2	1/20.020	1°25'50"	17.780	5	18.030	14.583	64	69	14.6	M10	24	5	0.2
MT3	1/19.922	1°26'16"	23.825	5	24.076	19.759	81	86	19.8	M12	28	7	0.6
MT4	1/19.254	1°29'15"	31.267	6.5	31.605	25.943	102.5	109	25.9	M16	32	9	1
MT5	1/19.002	1°30'26"	44.399	6.5	44.741	37.584	129.5	136	37.6	M20	40	9	2.5
MT6	1/19.180	1°29'36"	63.348	8	63.765	53.859	182	190	53.9	M24	50	12	4
MT7	1/19.231	1°29'22"	83.058	10	83.578	70.058	250	260	70.0	M33	80	18.5	5



Global Cutting Tool Leader **YG-1**

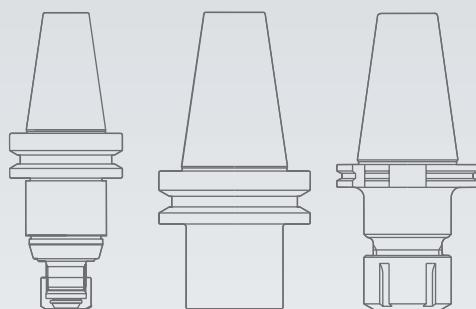

TOOLING SYSTEM